

SCOREBOARD SPECIFICATIONS

Overall size: 6' (W) x 4' 9" (H) x 6" (D)
 Approximate Weight: 165 lbs

36" LED Digits

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:

- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
 Requires an earth ground connection.

- MAX Current: **5.9** Amps

- AC Current Rating of Fuse or Circuit Breaker within SB: **8** Amps

Incoming AC Mains (Power Cord) and Data Location:
 Behind the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
 to be determined by customer in accordance
 with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-05-29	RDonald

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:
 OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.

TOLERANCE INFORMATION
 Dimensions are in inches
 Fractional ± 1/16"
 Two Place Decimals ± 0.02"
 Three Place Decimals ± 0.005"
 Four Place Decimals ± 0.0005"
 Angular ± 2°

THIRD ANGLE PROJECTION


4056 Blakie Road,
 London, ON, N6L 1P7
 Tel: (519) 652-5833
 Fax: (519) 652-3795
 Email: oes@oes-inc.com

DESCRIPTION
**OES ELECTRONIC SCOREBOARDS
 SHOTS36OCS-RP**

SIZE	FILENAME	INIT DRAWING DATE	REV
B	SHOTS36OCS-RP.idw	2023-05-29	A

USAGE
USE FOR REVIEW

SCALE	NTS	DRAWN BY	RDonald	PAGE	1 OF 1
-------	-----	----------	---------	------	--------

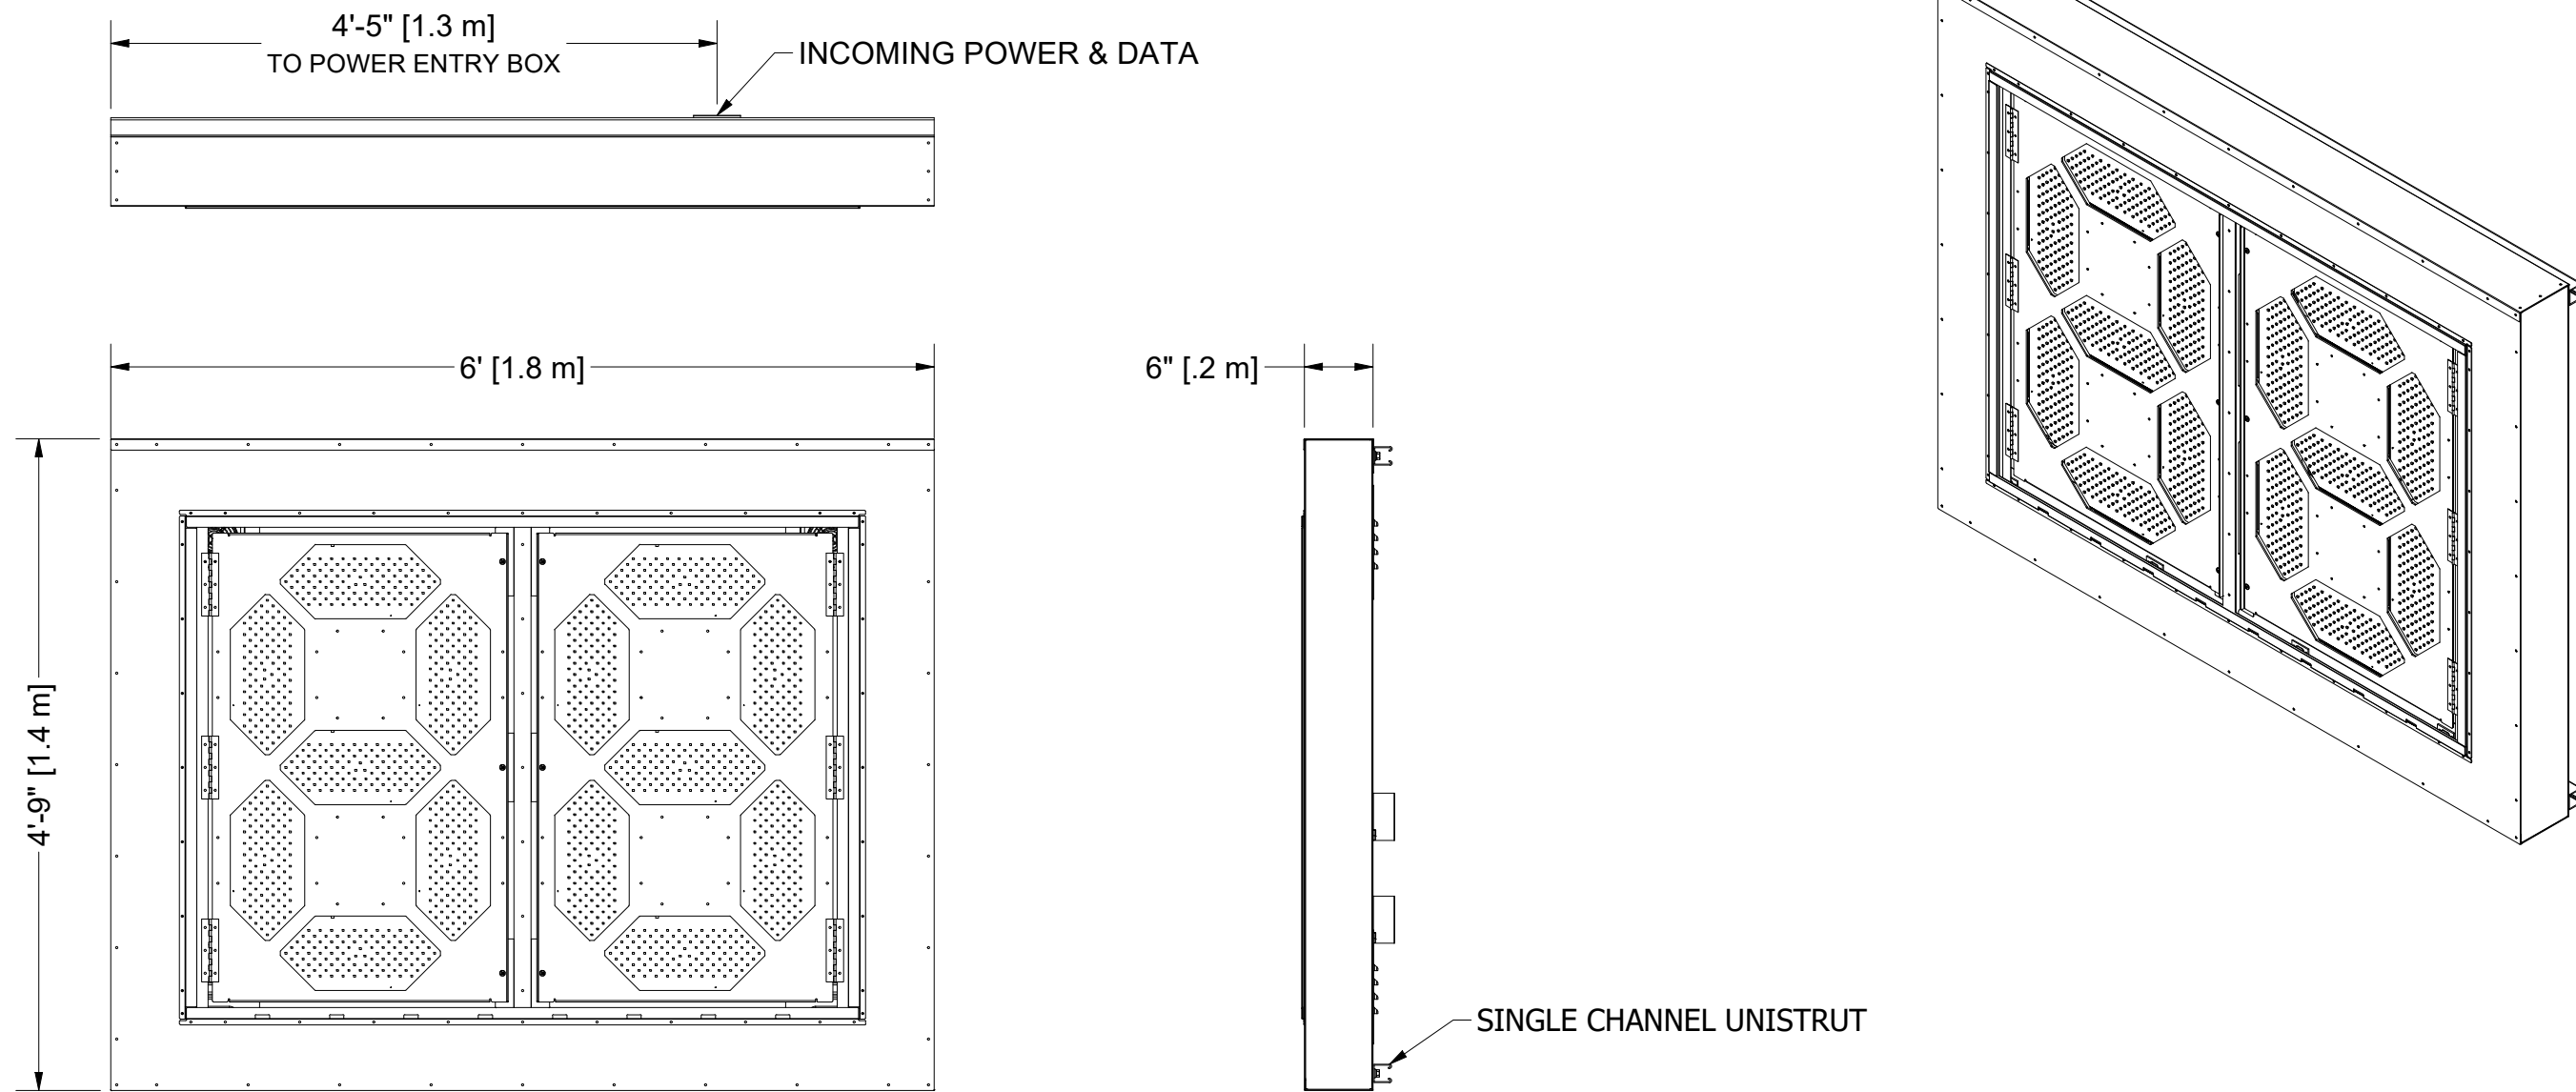

SCOREBOARD SPECIFICATIONS

Overall size: 6' (W) x 4' 9" (H) x 6" (D)
Approximate Weight: 165 lbs

36" LED Digits

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:

- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
Requires an earth ground connection.

- MAX Current: **5.9** Amps

- AC Current Rating of Fuse or Circuit Breaker within SB: **8** Amps

Incoming AC Mains (Power Cord) and Data Location:
Behind the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
to be determined by customer in accordance
with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-05-29	RDonald

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</p>		<p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>DESCRIPTION</p> <p>OES ELECTRONIC SCOREBOARDS SHOTS36UCS-RP</p>			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	SHOTS36UCS-RP.idw	2023-05-29	A
<p>USAGE</p> <p>USE FOR REVIEW</p>			
SCALE	NTS	DRAWN BY	PAGE
		RDonald	1 OF 1

TOLERANCE INFORMATION
Dimensions are in inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 2°

