

Scoreboard Specifications

Overall size: 9' (W) x 4'8 1/2" (H) x 4" (D)

Approximate Weight: 186 lbs

Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: TOP of the Scoreboard

MAX Current Draw: 5.6 Amps

14" LED Digits for TIME, SCORE

10" LED Digits for PERIOD

2" LED Arrows

5" Electronic Team Names at 8 CHARACTERS

4" White Vinyl Lettering for PERIOD

3" White Vinyl Lettering for P, TO, B

Optional AD space:

LEFT: 30.5" (W) X 23.25" (H)


RIGHT: 25" (W) X 23.25" (H)

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/13/2021

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>		<p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>DESCRIPTION</p> <p>OES ELECTRONIC SCOREBOARDS M5009AICE</p>			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M5009AICE	7/13/21	A
<p>THIRD ANGLE PROJECTIONS</p>			
<p>TOLERANCE INFORMATION</p> <p>Dimensions are in inches</p> <p>Fractional ± 1/16"</p> <p>Two Place Decimals ± 0.02"</p> <p>Three Place Decimals ± 0.005"</p> <p>Four Place Decimals ± 0.0005"</p> <p>Angular ± 30'</p>		<p>USAGE</p> <p>USE FOR REVIEW</p>	
SCALE	NTS	DRAWN BY	PAGE 1 OF 1
		CGTHOMPSON	

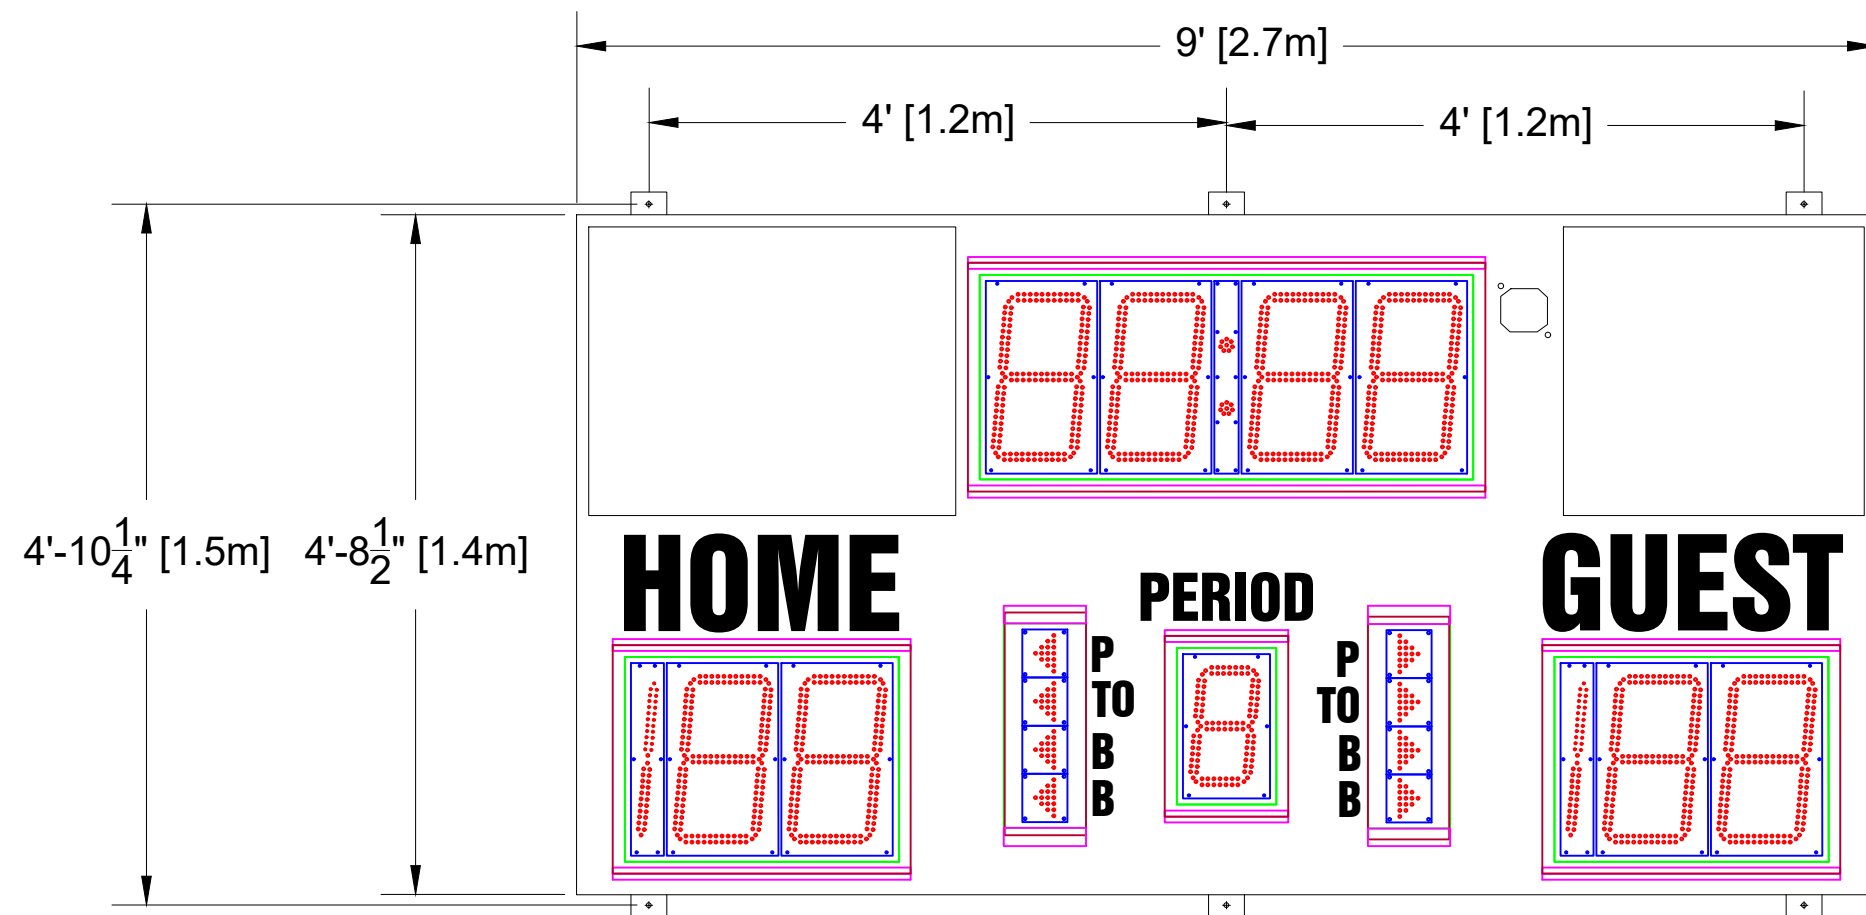

Scoreboard Specifications

Overall size: 9' (W) x 4'8 1/2" (H) x 4" (D)
 Approximate Weight: 171 lbs
 Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.
 Incoming Mains Power and Data Location: TOP of the Scoreboard
 MAX Current Draw: 2.9 Amps

14" LED Digits for TIME, SCORE
 10" LED Digits for PERIOD
 2" LED Arrows

8" White Vinyl Lettering for HOME, GUEST
 4" White Vinyl Lettering for PERIOD
 3" White Vinyl Lettering for P, TO, B

Optional AD space:
 LEFT: 30.5" (W) X 24" (H)
 RIGHT: 25" (W) X 24" (H)

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/1/2020

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>		<p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>DESCRIPTION</p> <p>OES ELECTRONIC SCOREBOARDS M5009AICV</p>			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M5009AICV	7/1/20	A
<p>THIRD ANGLE PROJECTIONS</p>			
<p>TOLERANCE INFORMATION</p> <p>Dimensions are in Inches</p> <p>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'</p>		<p>USAGE</p> <p>USE FOR REVIEW</p>	
SCALE	NTS	DRAWN BY	PAGE 1 OF 1
		CGTHOMPSON	