

**Scoreboard Specifications**

Overall size: 15' (W) x 7' (H) x 6" (D)

Approximate Weight: 701 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

22" LED Digits for SCORE

17" LED Digits for TIME, BALL ON, QTR, DOWN, TO GO

10" Electronic Team Names at 7 CH

8" White Vinyl Lettering for BALL ON, QTR, DOWN, TO GO

All LED digits include the following:


- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/12/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:


OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.

TOLERANCE INFORMATION  
Dimensions are in Inches  
Fractional ± 1/16"  
Two Place Decimals ± 0.02"  
Three Place Decimals ± 0.005"  
Four Place Decimals ± 0.0005"  
Angular ± 30'



4056 Blakie Road,  
London, ON, N6L 1P7  
Tel: (519) 652-5833  
Fax: (519) 652-3795  
Email: oes@oes-inc.com

DESCRIPTION			
<b>OES ELECTRONIC SCOREBOARDS M8015AxCE</b>			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8015AUXE	5/12/21	A
USAGE		<b>USE FOR REVIEW</b>	
SCALE	NTS	DRAWN BY	PAGE 1 OF 1
		<b>CGTHOMPSON</b>	

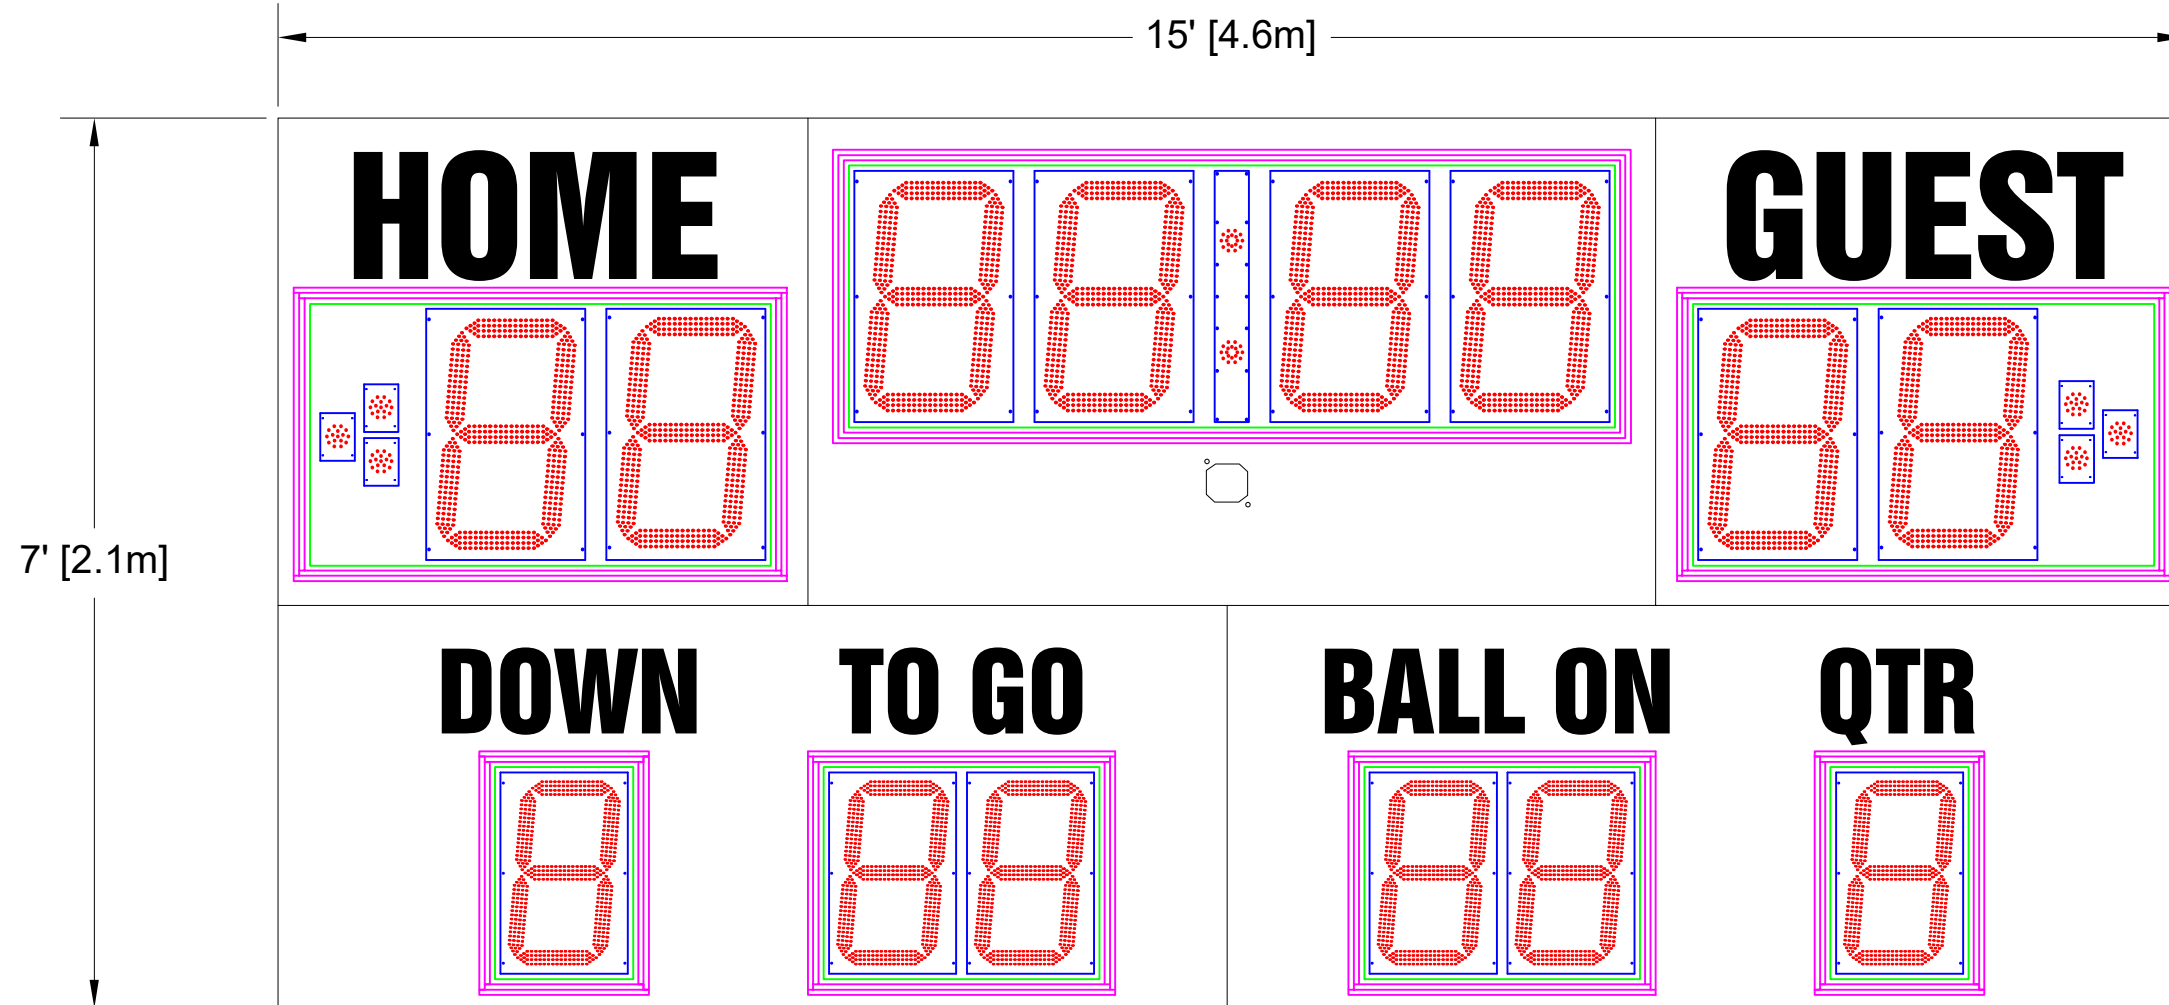

**Scoreboard Specifications**

Overall size: 15' (W) x 7' (H) x 6" (D)

Approximate Weight: 636 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

22" LED Digits for TIME, SCORE

17" LED Digits for DOWN, TO GO, BALL OB, QTR

12" White Vinyl Lettering for HOME, GUEST

8" White Vinyl Lettering for BALL ON, QTR, DOWN, TO GO

All LED digits include the following:

- \* Shatter Resistant Lexan cover
- \* Conformal coating to protect from environmental conditions
- \* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/11/2021

<p><b>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</b></p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p> <p><b>TOLERANCE INFORMATION</b> Dimensions are in Inches</p> <p>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</p>		<p><b>THIRD ANGLE PROJECTIONS</b></p>		<p><b>OES SCOREBOARDS</b></p> <p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
				<p><b>DESCRIPTION</b></p> <p>OES ELECTRONIC SCOREBOARDS M8015AxCV</p>	
SIZE	FILENAME	INIT DRAWING DATE	REV		
A	M8015AUXV	5/11/21	A		
USAGE		USE FOR REVIEW			
SCALE	NTS	DRAWN BY	CGTHOMPSON	PAGE	1 OF 1