

Scoreboard Specifications

Overall size: 18' (W) x 4'-7" (H) x 6" (D)

Approximate Weight: 576 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the TIME Digit(s).

22" LED Digits for TIME, SCORE

17" LED Digits for PERIOD



10" Electronic Team Names at 8 CH


7" White Vinyl Lettering for PERIOD

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/20/2021

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>		 <p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>DESCRIPTION</p> <p>OES ELECTRONIC SCOREBOARDS M3018AxCE</p>			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M3018AUXE	12/20/21	A
<p>USAGE</p> <p>USE FOR REVIEW</p>			
<p>TOLERANCE INFORMATION Dimensions are in inches</p> <p>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'</p>		<p>THIRD ANGLE PROJECTIONS</p> 	
SCALE	NTS	DRAWN BY	PAGE
		RDONALD	1 OF 1

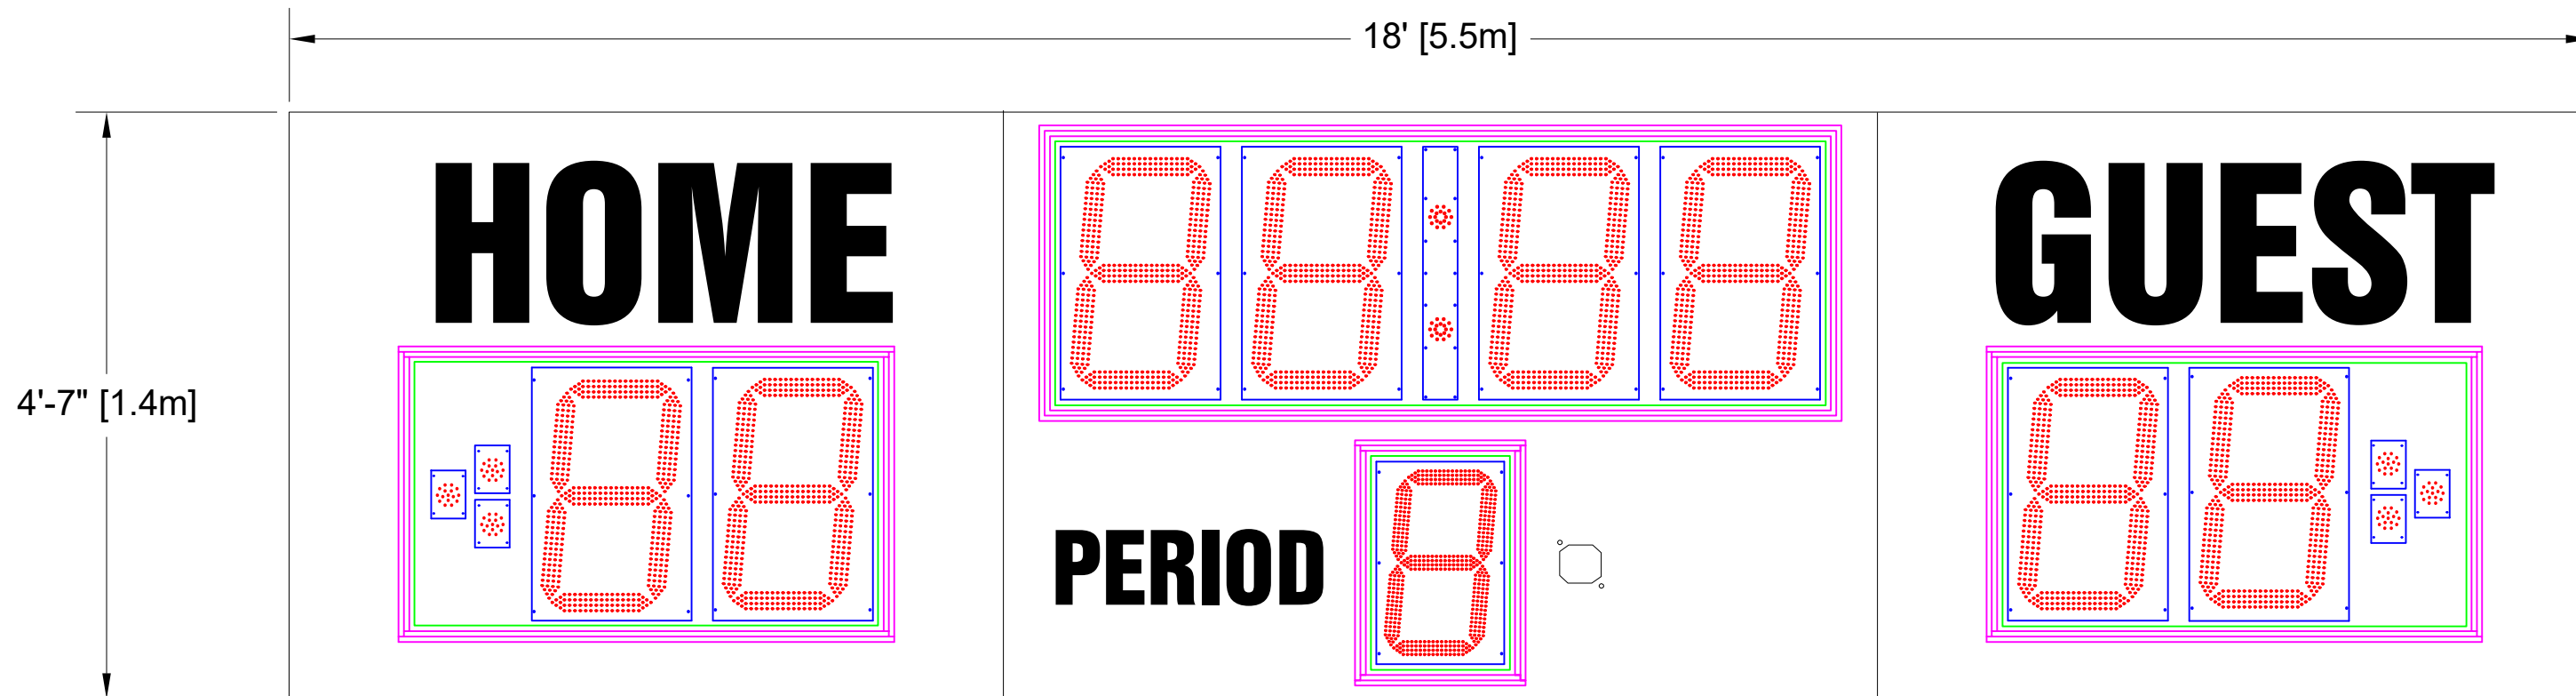

Scoreboard Specifications

Overall size: 18' (W) x 4'-7" (H) x 6" (D)

Approximate Weight: 540 lbs

Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the TIME Digit(s).

22" LED Digits for TIME, SCORE

17" LED Digits for PERIOD



15" White Vinyl Lettering for HOME, GUEST

7" White Vinyl Lettering for PERIOD

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/20/2021

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>		 <p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>TOLERANCE INFORMATION Dimensions are in inches</p> <p>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30'</p>		<p>THIRD ANGLE PROJECTIONS</p> 	
<p>SIZE</p> <p>B</p>	<p>FILENAME</p> <p>M3018AUXV</p> <p>USAGE</p> <p>USE FOR REVIEW</p>	<p>INIT DRAWING DATE</p> <p>12/20/21</p>	<p>REV</p> <p>A</p>
<p>SCALE</p> <p>NTS</p>		<p>DRAWN BY</p> <p>RDONALD</p>	
<p>PAGE</p> <p>1 OF 1</p>		<p>PAGE</p> <p>1 OF 1</p>	