

Scoreboard Specifications

Overall size: 8' (W) x 4'5" (H) x 4" (D)
 Approximate Weight: 170 lbs
 Incoming Mains Power: (1) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 8 Amps. Requires an earth ground connection.
 Incoming Mains Power and Data Location: TOP of the Scoreboard
 MAX Current Draw: 5.6 Amps

14" LED Digits for TIME
 10" LED Digits for HOME, GUEST, PERIOD
 2" LED Dots

5" Electronic Team Names at 8 CHARACTERS


4" White Vinyl Lettering for PERIOD
 3" White Vinyl Lettering for P. TO. B

Optional AD space:
 LEFT: 24.5" (W) X 24" (H)
 RIGHT: 19.5" (W) X 24" (H)

All LED digits include the following:


- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle



REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	7/13/2021

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</p>		 <p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M5008AICE	7/13/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	CGTHOMPSON
		PAGE	1 OF 1

TOLERANCE INFORMATION
 Dimensions are in Inches

Fractional ± 1/16"
 Two Place Decimals ± 0.02"
 Three Place Decimals ± 0.005"
 Four Place Decimals ± 0.0005"
 Angular ± 30'



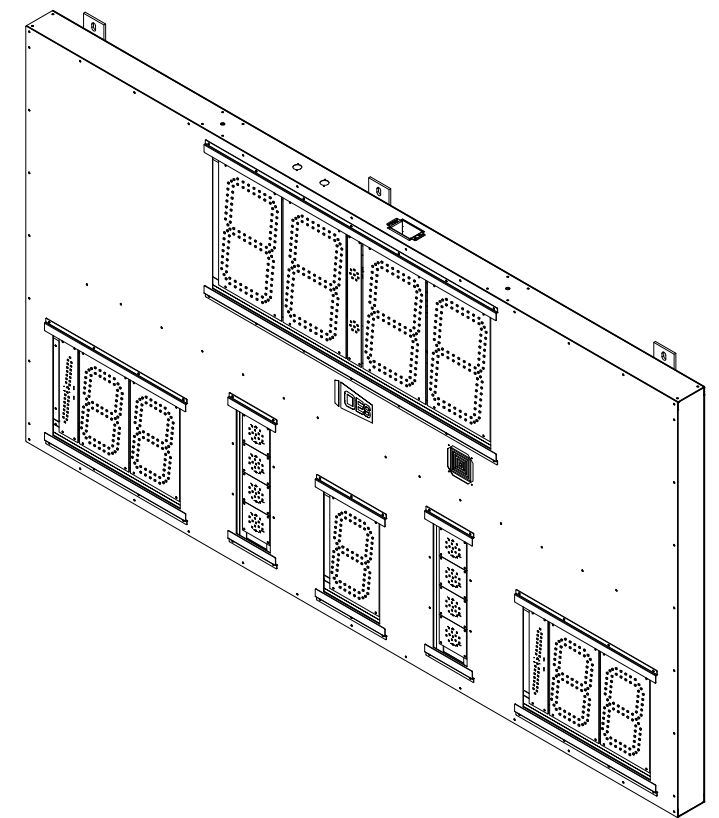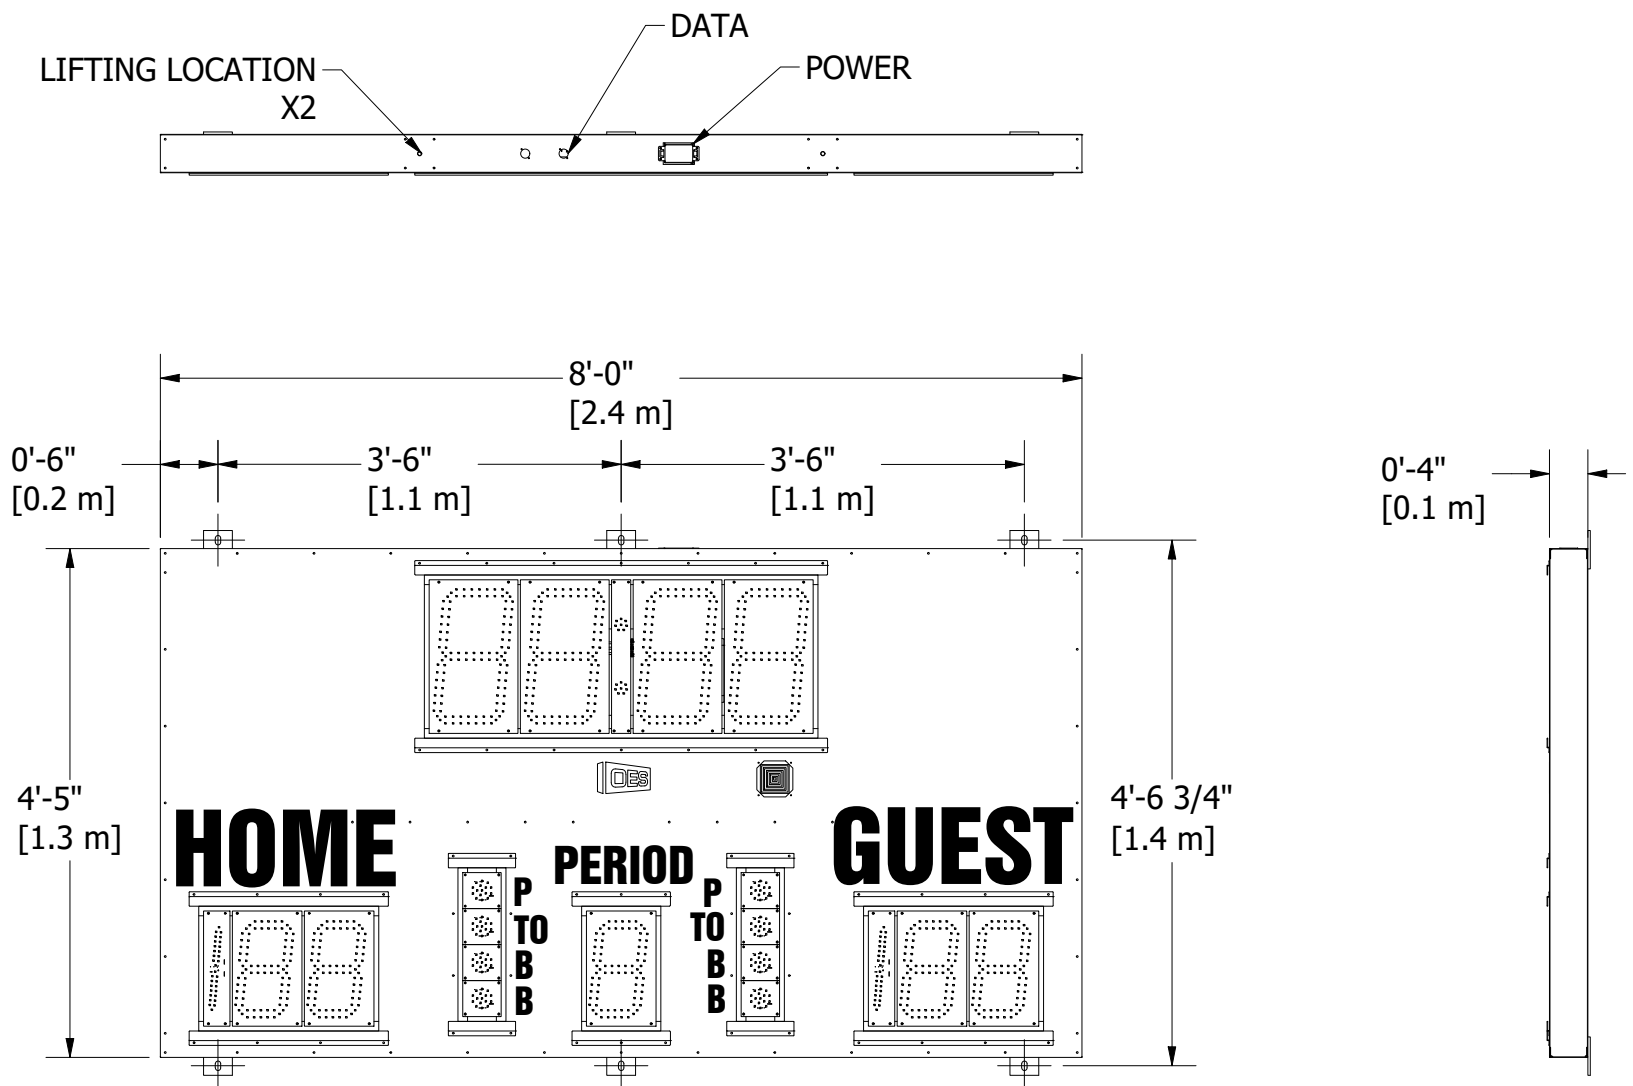

Scoreboard Specifications

Overall size: 8' (W) x 4'5" (H) x 4" (D)
 Approximate Weight: 152 lbs

14" LED Digits for (TIME)
 10" LED Digits for (HOME, GUEST, PERIOD)
 2" LED Dots

7" White Vinyl Lettering for (HOME, GUEST)
 4" White Vinyl Lettering for (PERIOD)
 3" White Vinyl Lettering for (P, TO, B)

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:
 - AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
 Requires an earth ground connection.

- MAX Current: 1.1 Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: 5 Amps

Incoming AC Mains (Power Cord) and Data Location:
 On the Top of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
 to be determined by customer in accordance
 with all local electrical codes.

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:
 OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.

TOLERANCE INFORMATION
 Dimensions are in inches
 Fractional ± 1/16"
 Two Place Decimals ± 0.02"
 Three Place Decimals ± 0.005"
 Four Place Decimals ± 0.0005"
 Angular ± 2°

THIRD ANGLE PROJECTION

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	3/14/2024	M.LI



4056 Blakie Road,
 London, ON, N6L 1P7
 Tel: (519) 652-5833
 Fax: (519) 652-3795
 Email: oes@oes-inc.com

DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M5008AICV-INFO			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	M5008AICV-INFO.idw	3/14/2024	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	M.LI
			PAGE 1 OF 1