

SCOREBOARD SPECIFICATIONS

Overall size: 12' (W) x 4'-11" (H) x 6" (D)
Approximate Weight: 331 lbs

- 22" LED Digits for **TIME**
- 17" LED Digits for **SCORE**
- 14" LED Digits for **DOWN, TO GO, BALL ON, QTR**
- 6" White Vinyl Lettering for **ALL**

- All LED digits include the following:
- *Shatter Resistant Lexan cover
 - *Conformal coating to protect from environmental conditions
 - *Surface Mount Technology LEDs allowing for wide viewing angle




ELECTRICAL SPECIFICATIONS




- Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
 - MAX Current: **9.1 Amps**
 - AC Current Rating of Fuse or Circuit Breaker within SB: **15 Amps**

Incoming AC Mains (Power Cord) and Data Location:
Behind the **TIME** digits.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2022-07-08	RDonald

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div> <div>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2°</div>		<div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>							
		DESCRIPTION							
<div>THIRD ANGLE PROJECTION</div> <div></div>		OES ELECTRONIC SCOREBOARDS M8012AOCV							
		SIZE	FILENAME	INIT DRAWING DATE	REV				
<div></div>		B		8012AOCV-INFO.idw	2022-07-08	A			
		USAGE		USE FOR REVIEW					
SCALE		NTS		DRAWN BY		RDonald	PAGE	1	OF 1

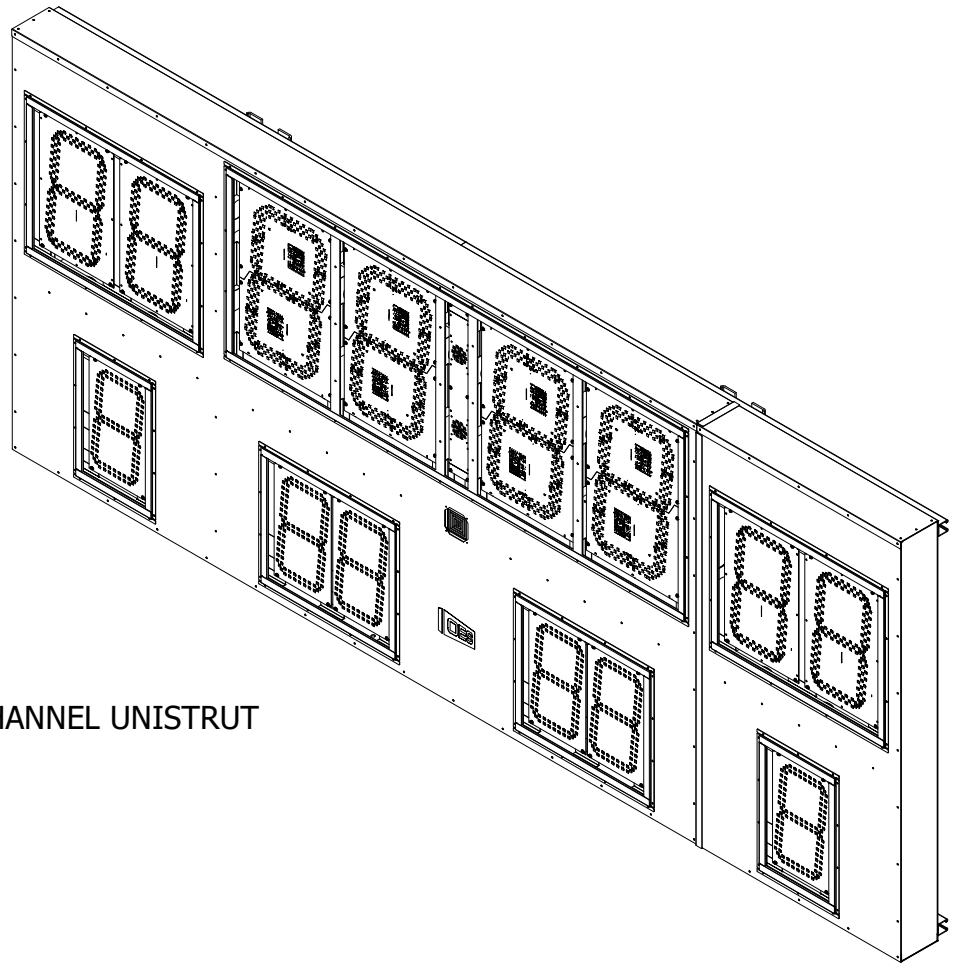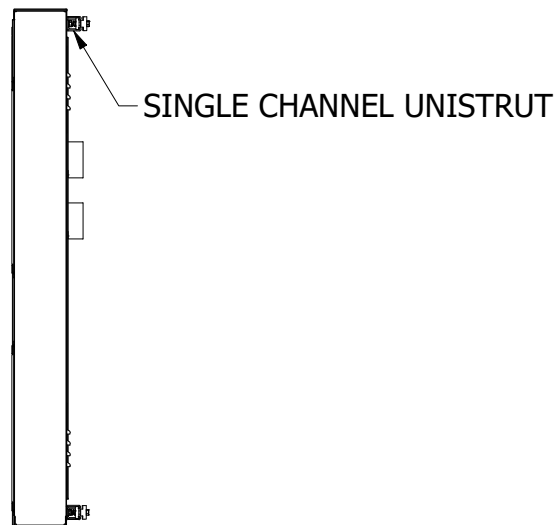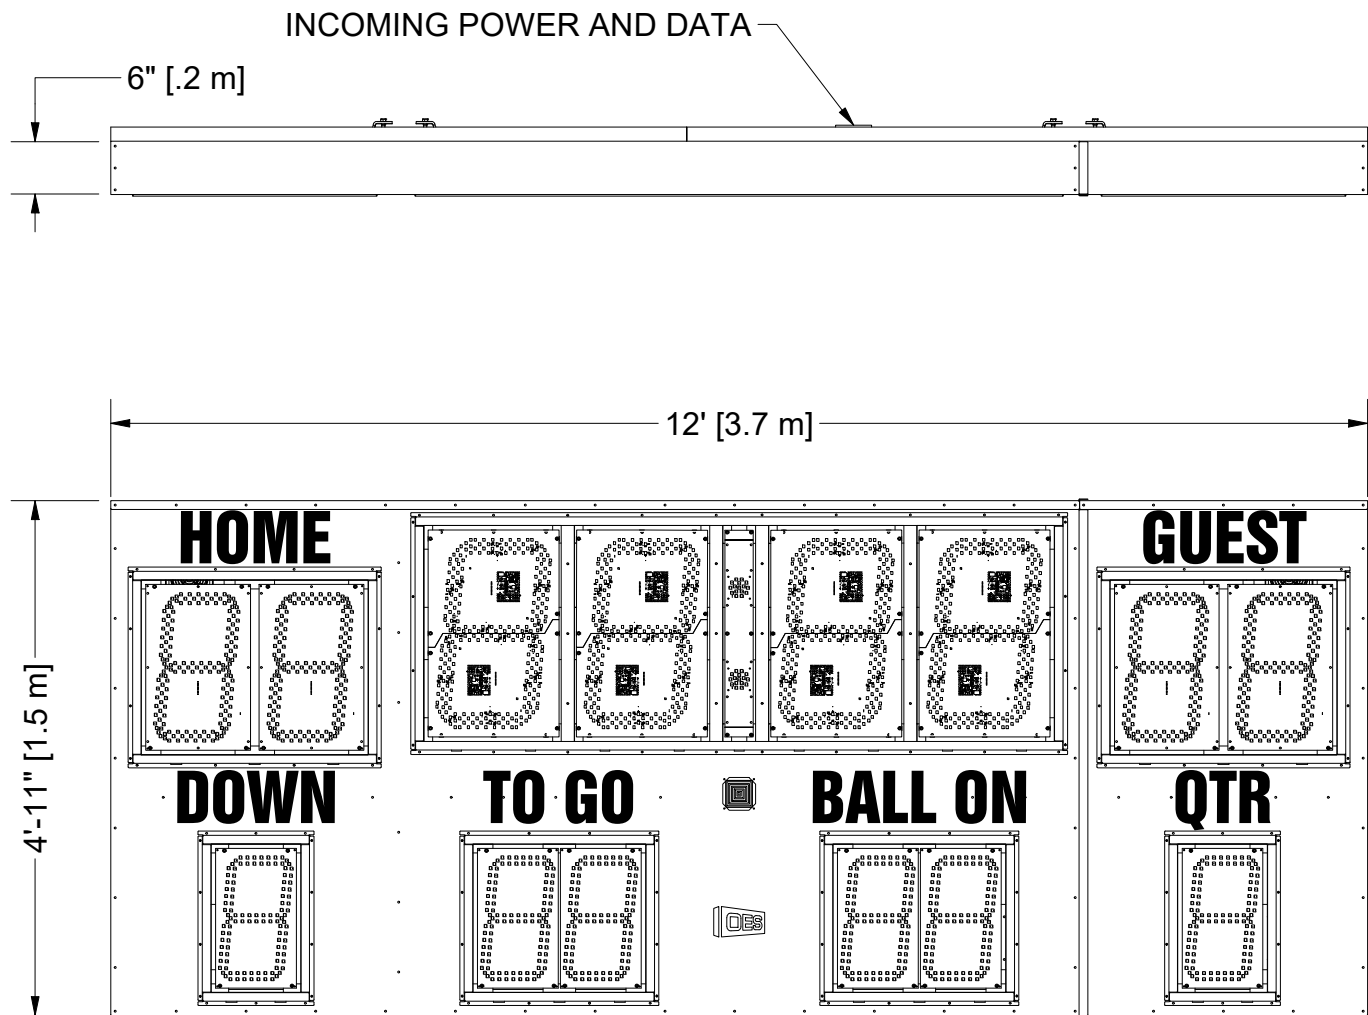

SCOREBOARD SPECIFICATIONS

Overall size: 12' (W) x 4'-11" (H) x 6" (D)
Approximate Weight: 331 lbs

22" LED Digits for **TIME**
17" LED Digits for **SCORE**
14" LED Digits for **DOWN, TO GO, BALL ON, QTR**

6" White Vinyl Lettering for **ALL**

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
Requires an earth ground connection.

- MAX Current: **9.1** Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: **15** Amps

Incoming AC Mains (Power Cord) and Data Location:
Behind the **TIME** digits.

Overcurrent Branch Circuit Protection supplying the scoreboard
to be determined by customer in accordance
with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2022-07-08	RDonald

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div> <div>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2°</div>		<div><div><div>OES</div><div>SCOREBOARDS</div></div><div>DESCRIPTION</div><div>OES ELECTRONIC SCOREBOARDS M8012AUCV</div></div>		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
				7/11/2022	
THIRD ANGLE PROJECTION		USE FOR REVIEW		1 OF 1	
SCALE NTS		DRAWN BY RDDonald		PAGE 1 OF 1	