

3x3x3/16 HRS ANGLE

POWER AND DATA IN

SCOREBOARD SPECIFICATIONS

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1172 lbs

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL
10" Electronic Team names at 8 Ch
10" Electronic Captions at 6 Ch
10" Electronic Captions at 3 Ch

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:



- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. **(x2)**
- MAX Current: **14.4 Amps (x2)**
- AC Current Rating of Fuse or Circuit Breaker within SB: **20 Amps (x2)**

Incoming AC Mains (Power Cord) and Data Location:
Behind the **BALL ON** digits.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-11-30	LDeMello

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div> <div>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2°</div>		<div><div>OES SCOREBOARDS</div><div>DESCRIPTION</div><div>OES ELECTRONIC SCOREBOARDS 8025COCH-TF-INFO</div></div>	
		<div>SIZE B</div> <div>FILENAME 8025COCH-TF-INFO.idw</div> <div>INIT DRAWING DATE 2023-11-30</div> <div>REV A</div>	<div>USE FOR REVIEW</div>
SCALE NTS		DRAWN BY LDeMello	PAGE 1 OF 1

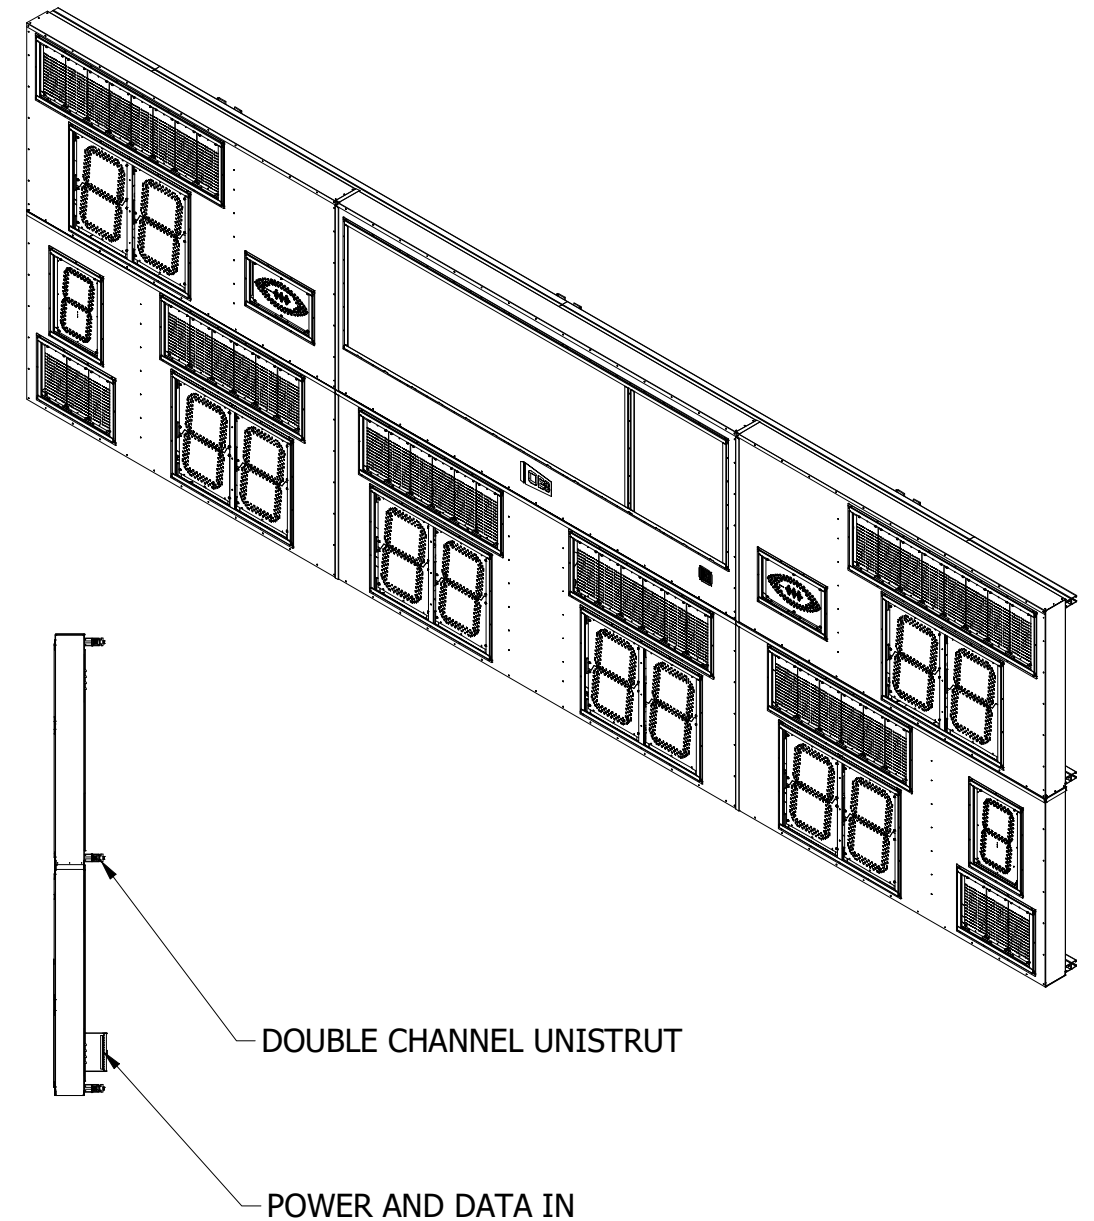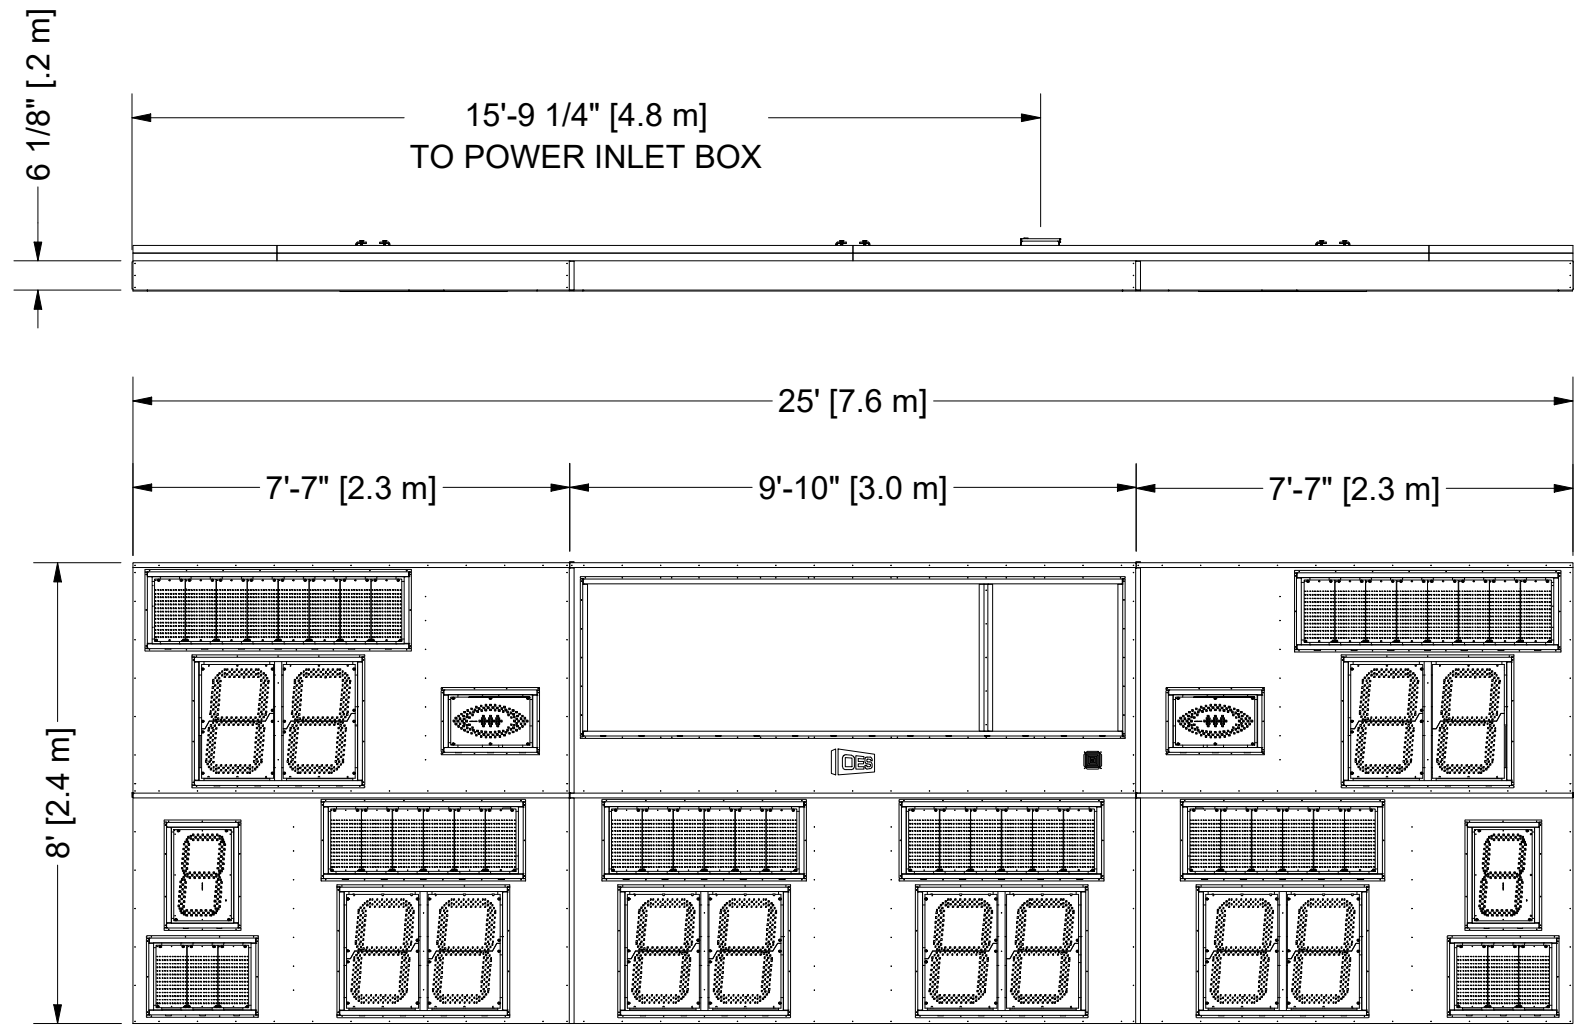

SCOREBOARD SPECIFICATIONS

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1172 lbs

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL
10" Electronic Team names at 8 Ch
10" Electronic Captions at 6 Ch
10" Electronic Captions at 3 Ch

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:

- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. **(x2)**
Requires an earth ground connection.
- MAX Current: **14.4 Amps (x2)**
- AC Current Rating of Fuse or Circuit Breaker within SB: **20 Amps (x2)**

Incoming AC Mains (Power Cord) and Data Location:
Behind the **BALL ON** digits.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-11-30	LDeMello
B	PART NUMBER UPDATED	2024-06-18	CArora

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.

TOLERANCE INFORMATION
Dimensions are in inches
Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 2°

THIRD ANGLE PROJECTION

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION

OES ELECTRONIC SCOREBOARDS
8025CUCH-TF-INFO

SIZE	FILENAME	INIT DRAWING DATE	REV
B	8025CUCH-TF-INFO.idw	2023-11-30	A


USAGE

USE FOR REVIEW

SCALE **NTS**

DRAWN BY **LDeMello**

PAGE **1** OF **1**

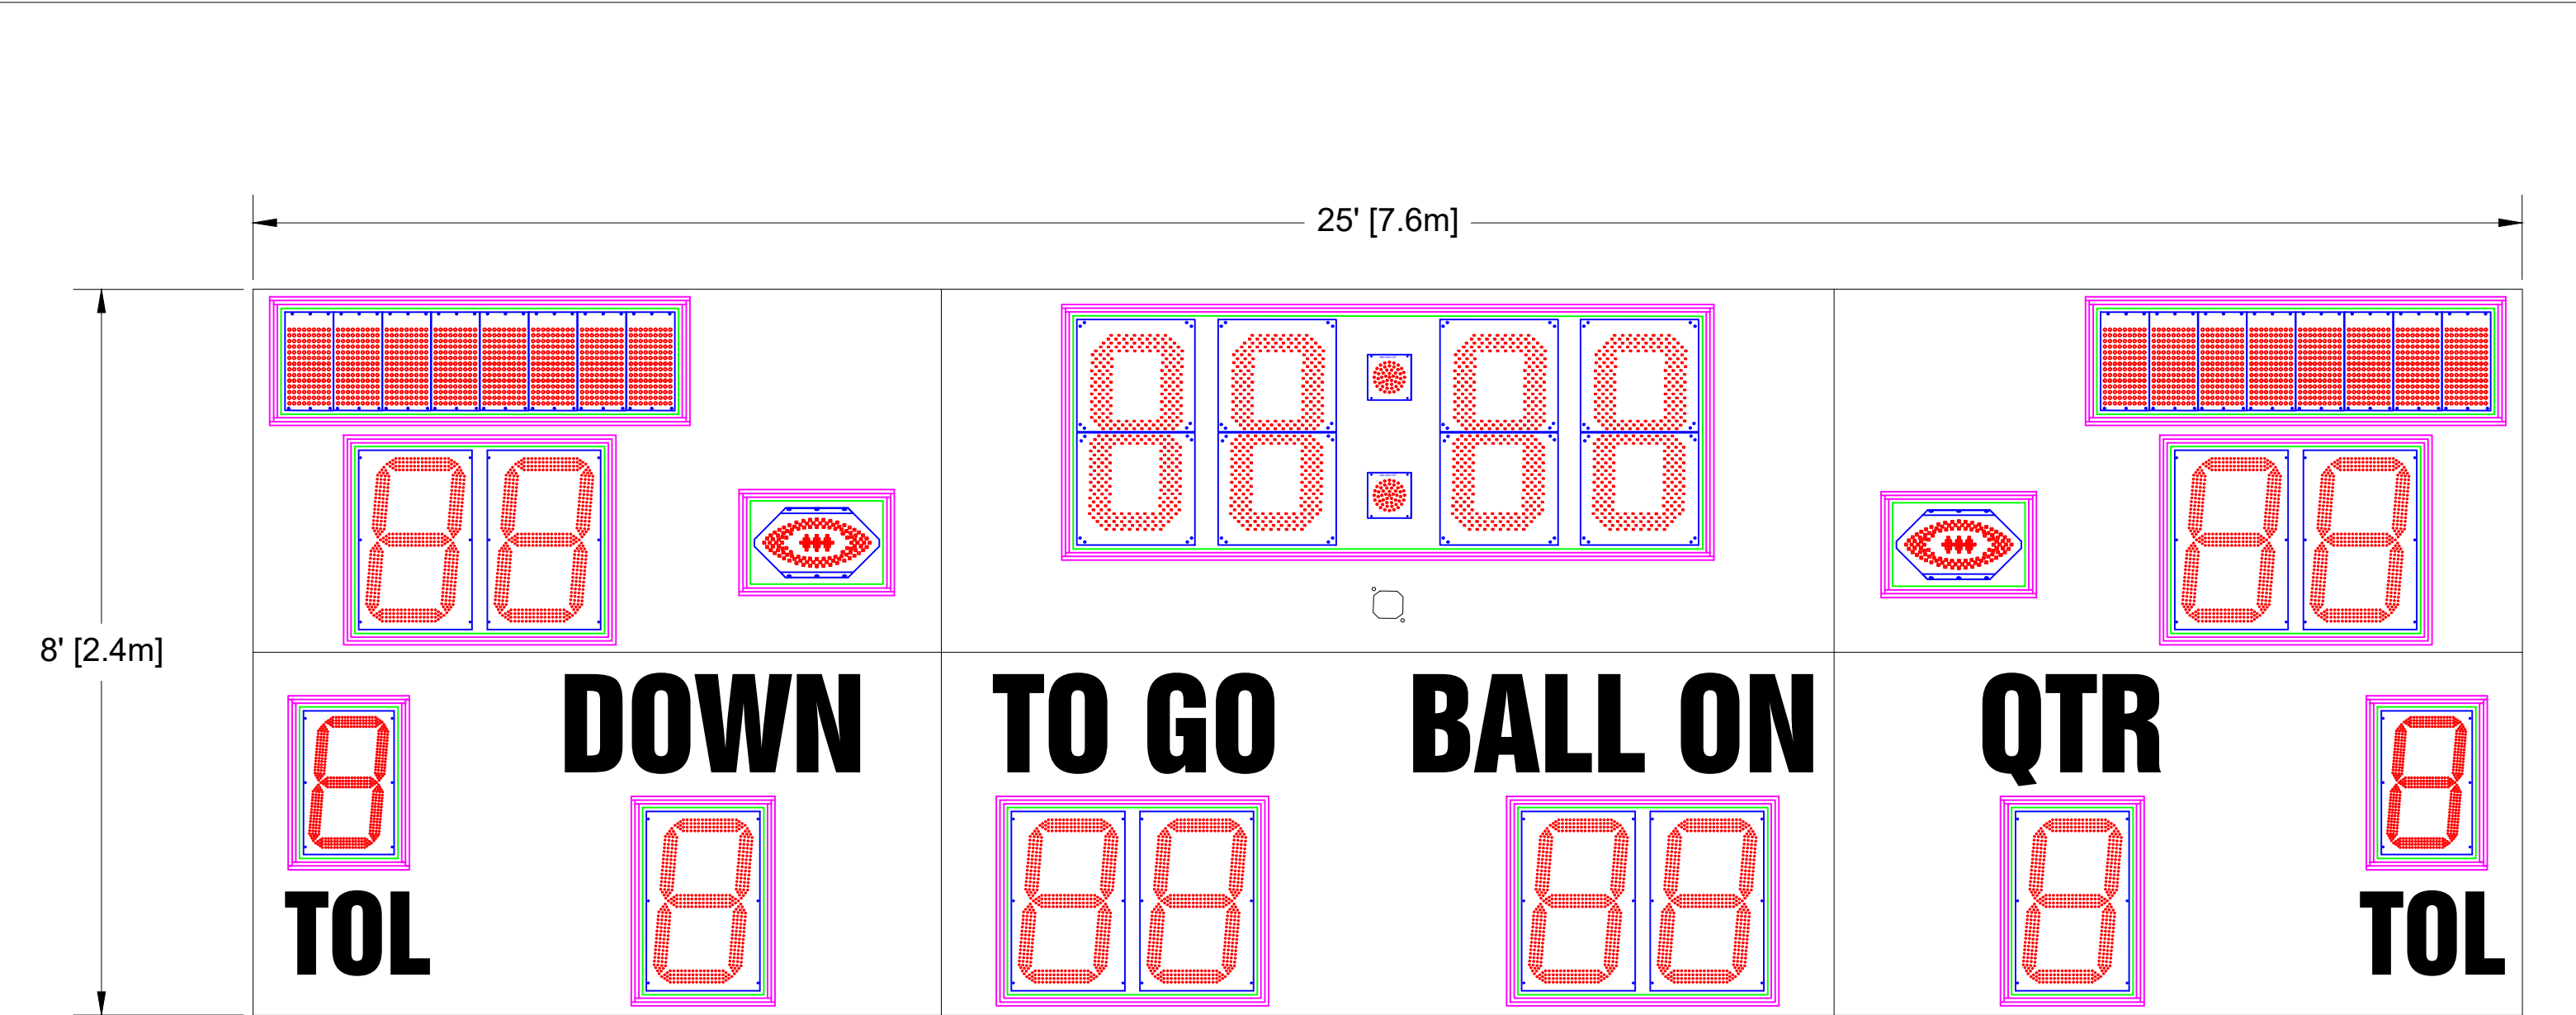

Scoreboard Specifications
Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1038 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names at 8 CH

13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.


TOLERANCE INFORMATION
Dimensions are in Inches

Fractional ± 1/16"
Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30°

THIRD ANGLE PROJECTIONS

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION	
OES ELECTRONIC SCOREBOARDS M8025CxCE	
SIZE	FILENAME
A	M8025CUXE
USAGE	INIT DRAWING DATE
USE FOR REVIEW	
SCALE	NTS
DRAWN BY	CGTHOMPSON
PAGE	1 OF 1

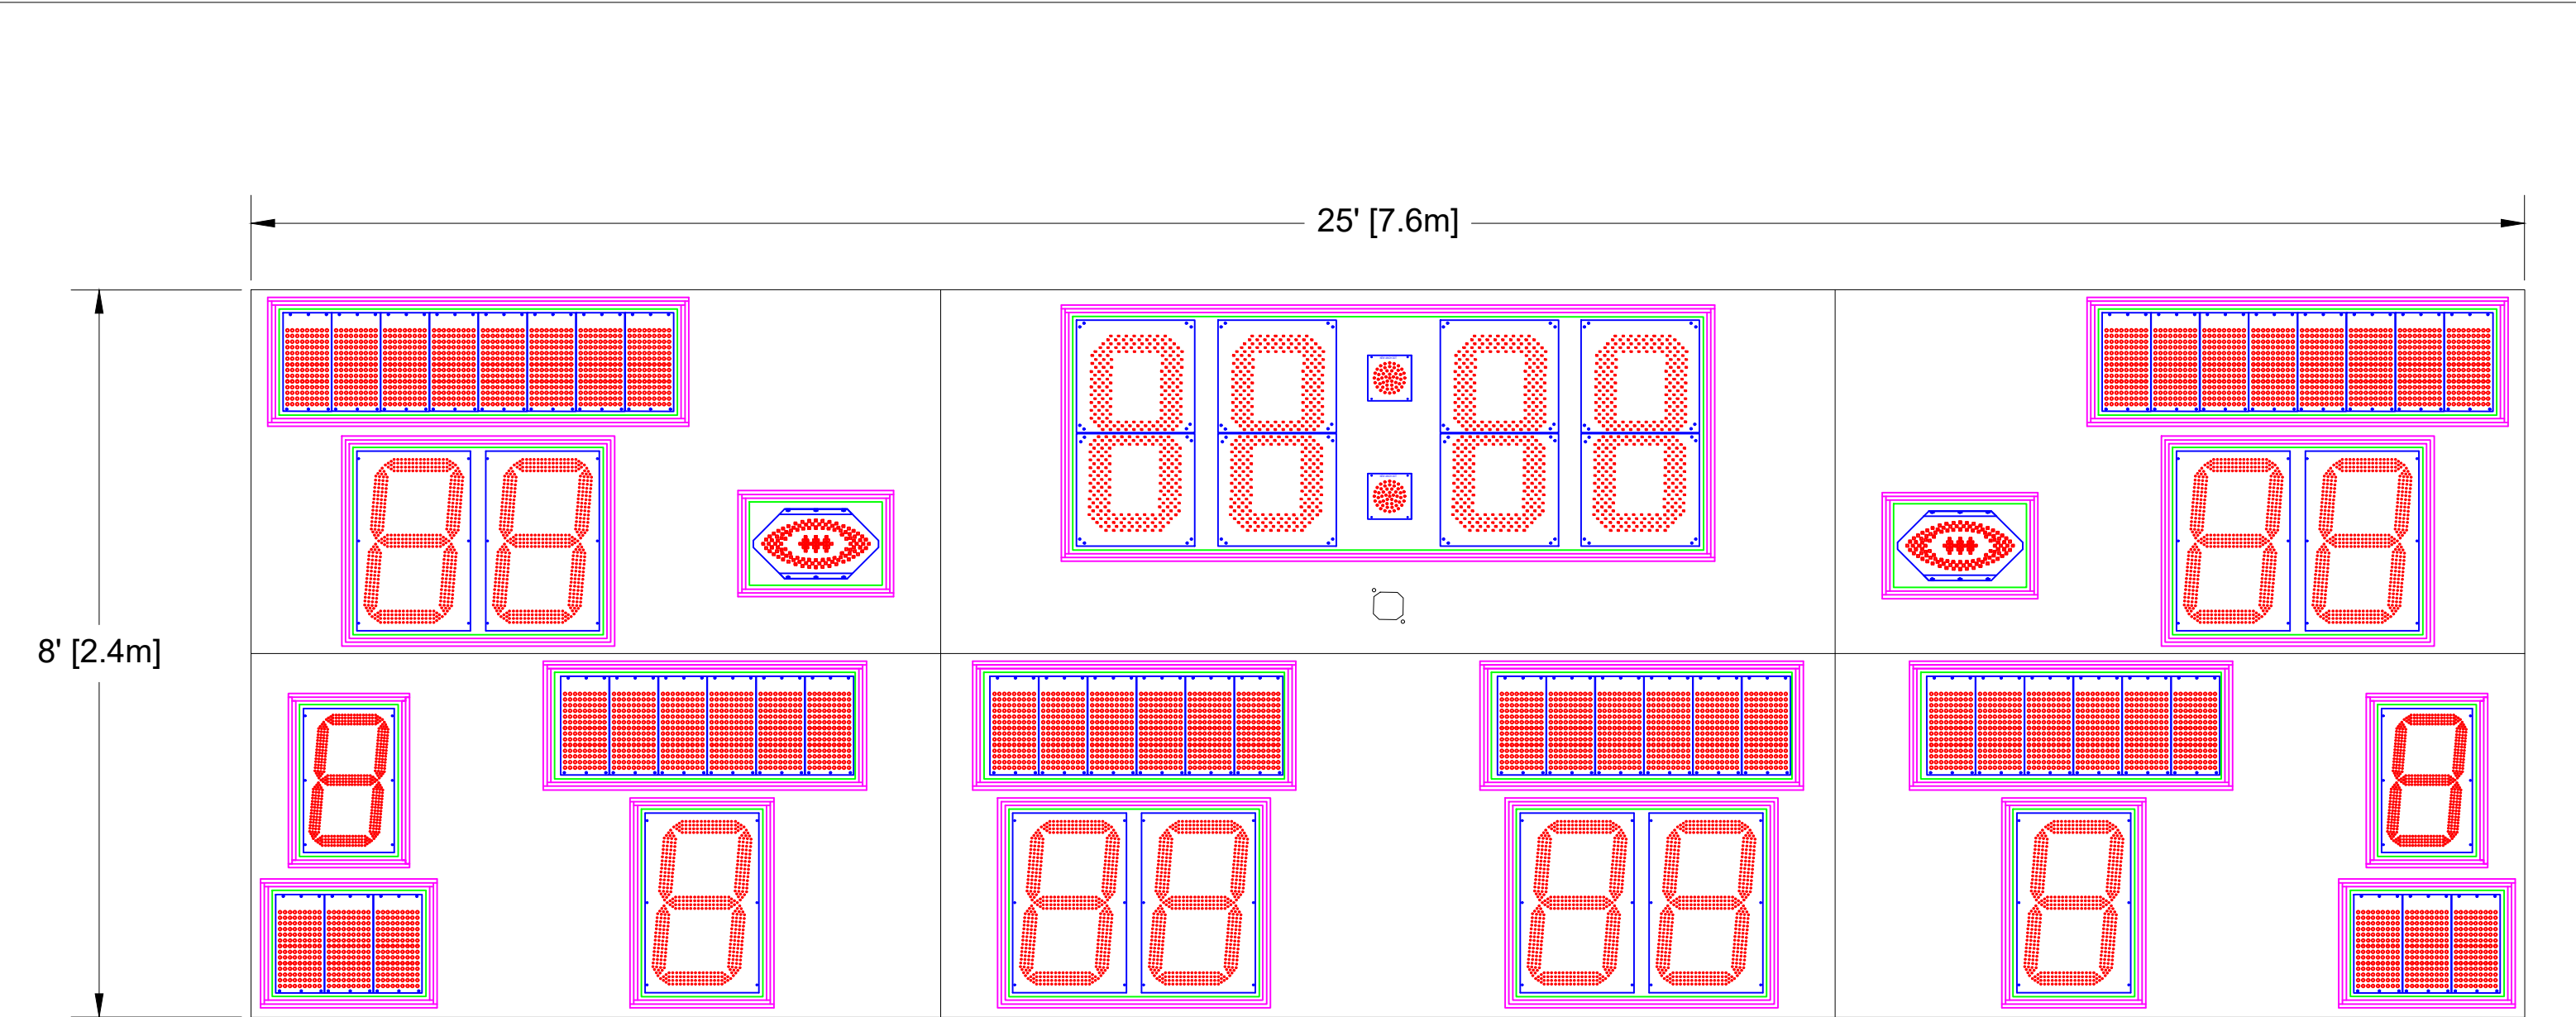

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1123 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.



Incoming Mains Power and Data Location: Behind the BALL ON Digit.


- 30" LED Digits for TOD
- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
- 17" LED Digits for TOL
- 10" Electronic Team names at 8 Ch
- 10" Electronic Captions at 6 Ch
- 10" Electronic Captions at 3 Ch

This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		 <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M8025CUXH USAGE	INIT DRAWING DATE 12/18/21	REV A
SCALE NTS		DRAWN BY CGTHOMPSON	
		PAGE 1 OF 1	

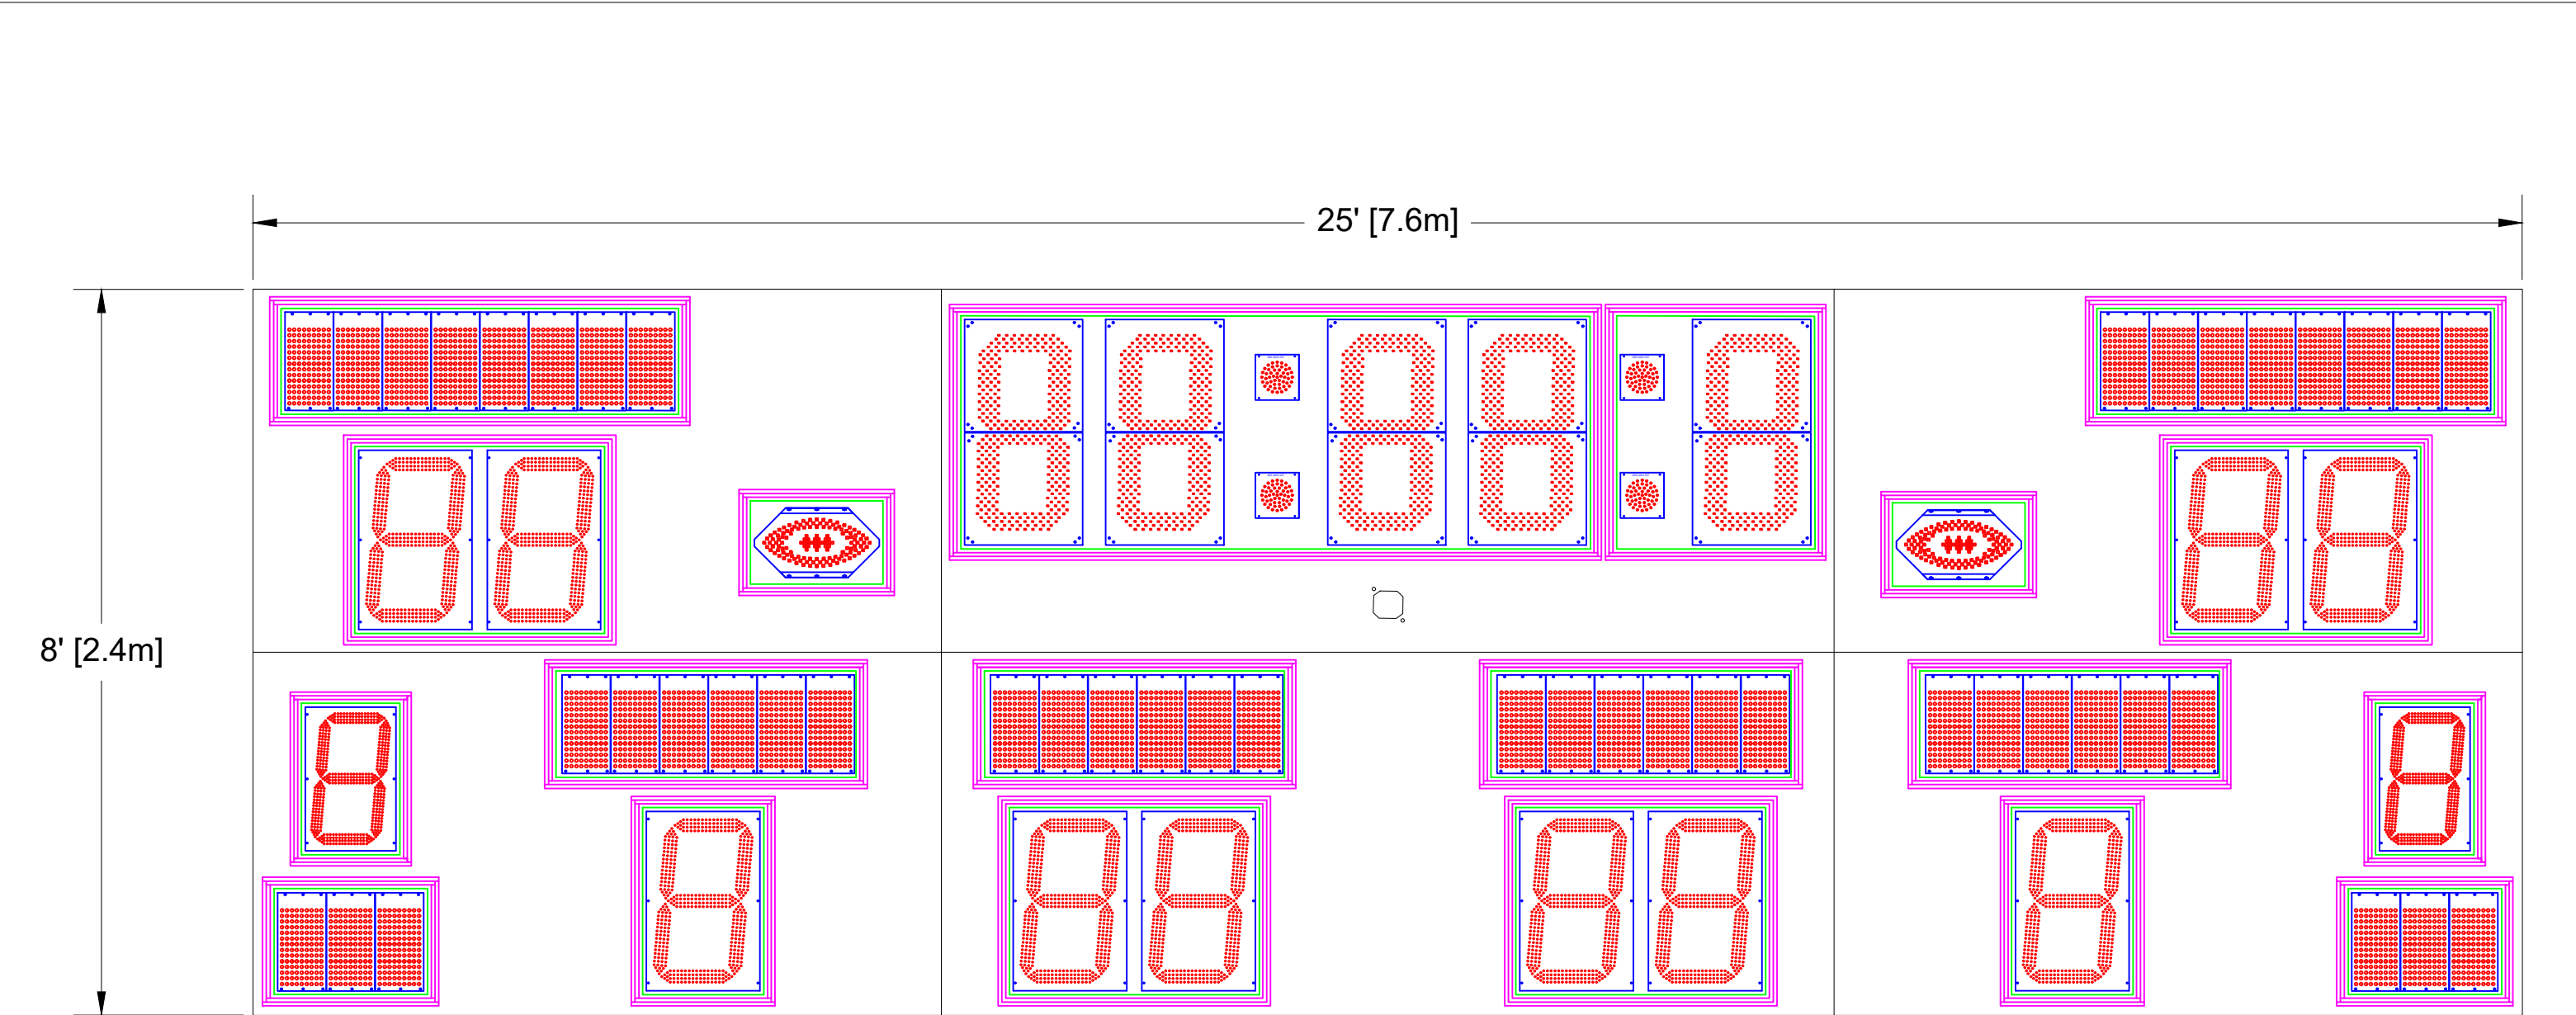

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1154 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

- 30" LED Digits for TOD
- 22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
- 17" LED Digits for TOL
- 10" Electronic Team names at 8 Ch
- 10" Electronic Captions at 6 Ch
- 10" Electronic Captions at 3 Ch


This Layout is for internal reference only.
All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	

DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025CxCH-T			
SIZE A	FILENAME M8025CUXH-T	INIT DRAWING DATE 12/18/21	REV A
USAGE USE FOR REVIEW			
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

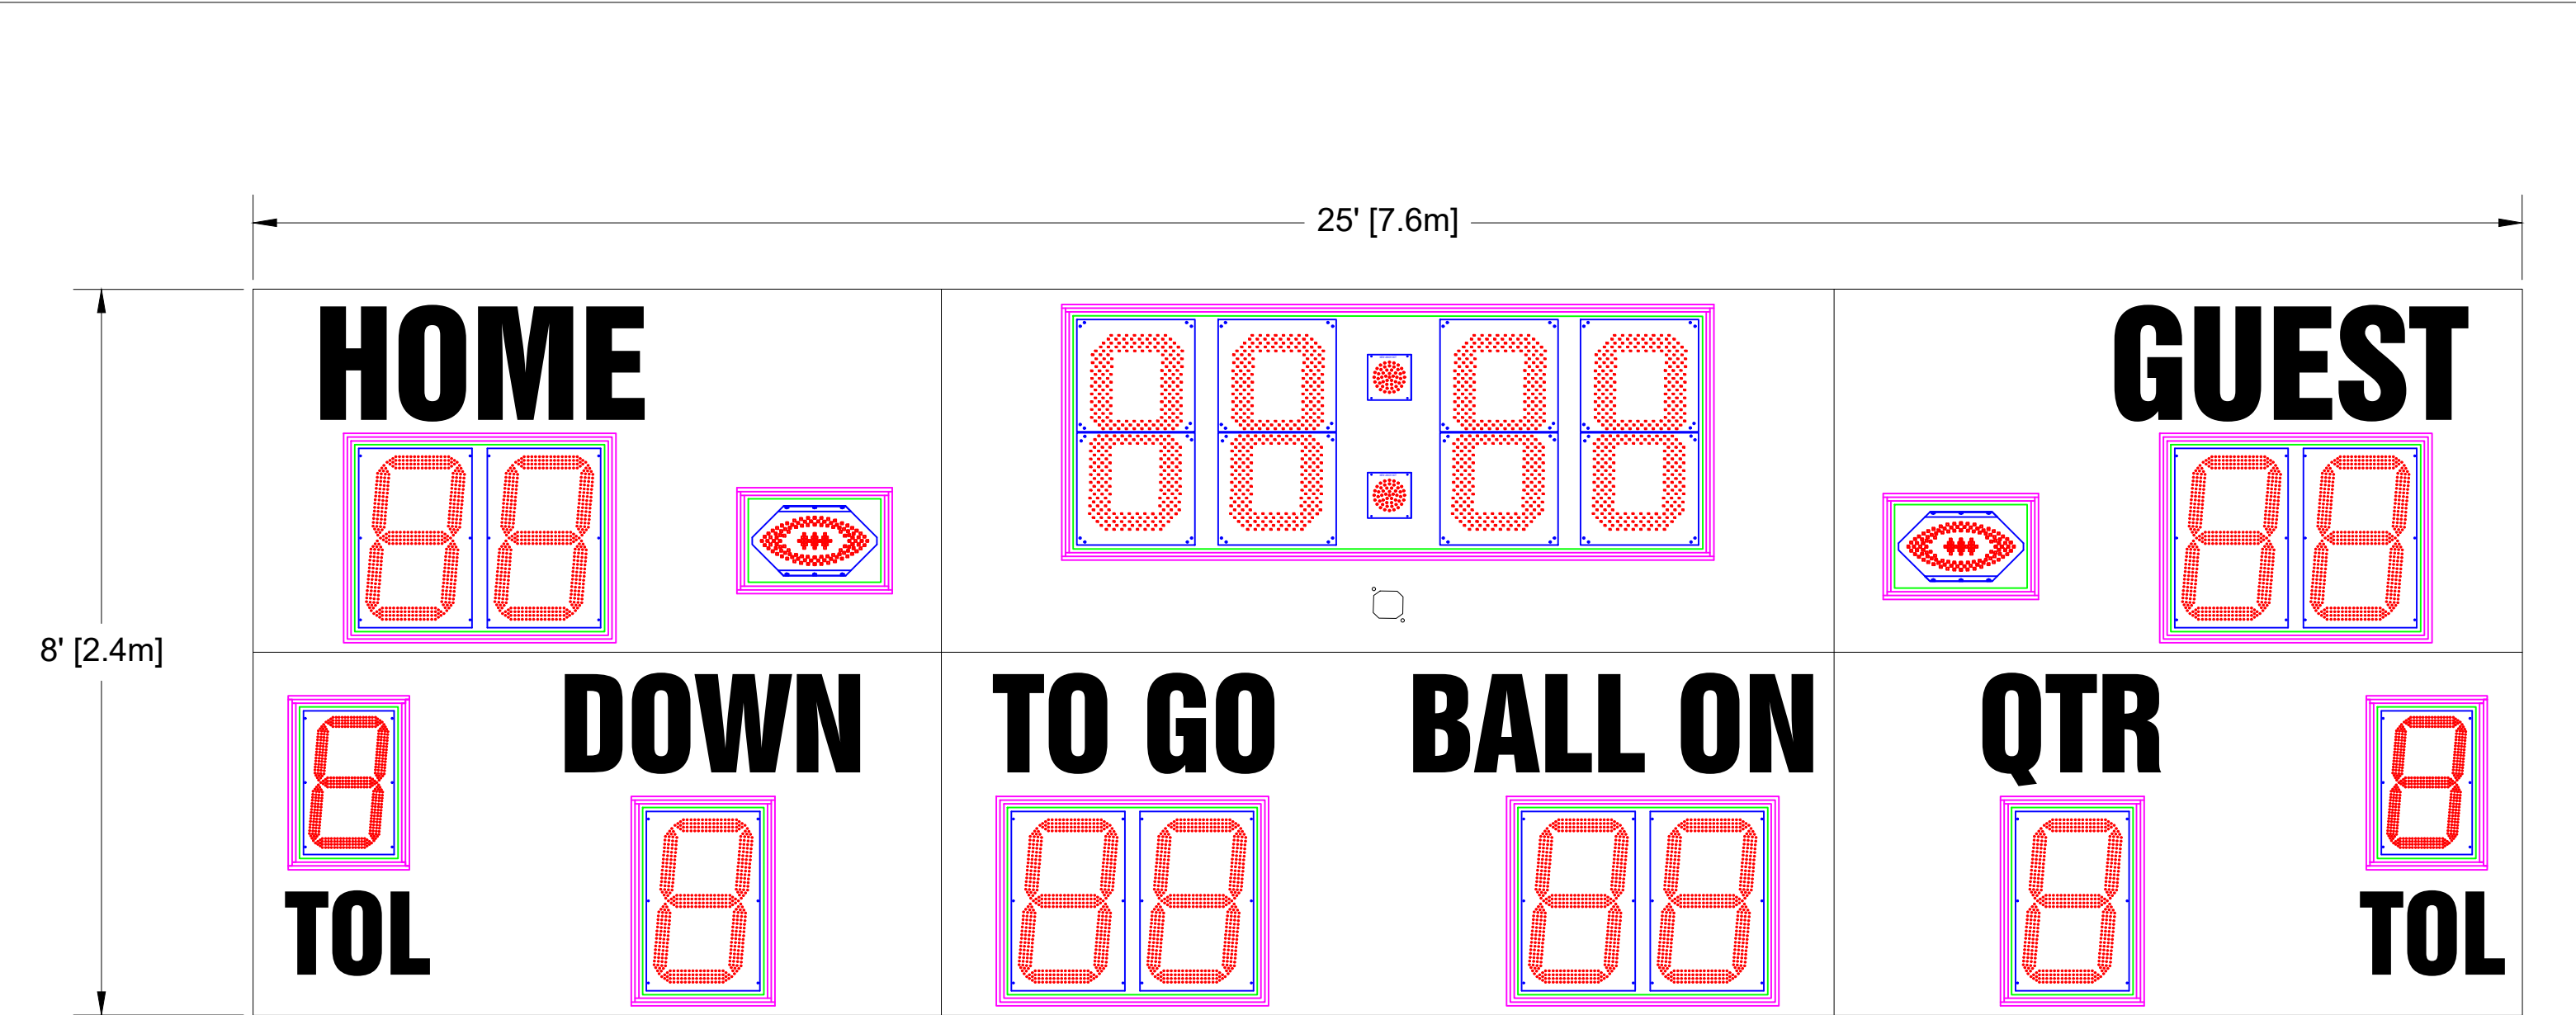

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1001 lbs
Incoming Mains Power: (1x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

- This Layout is for internal reference only.
- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.			
TOLERANCE INFORMATION Dimensions are in Inches			
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°			
THIRD ANGLE PROJECTIONS			
DESCRIPTION			
OES ELECTRONIC SCOREBOARDS M8025CxCV			
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8025CUXV	12/18/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

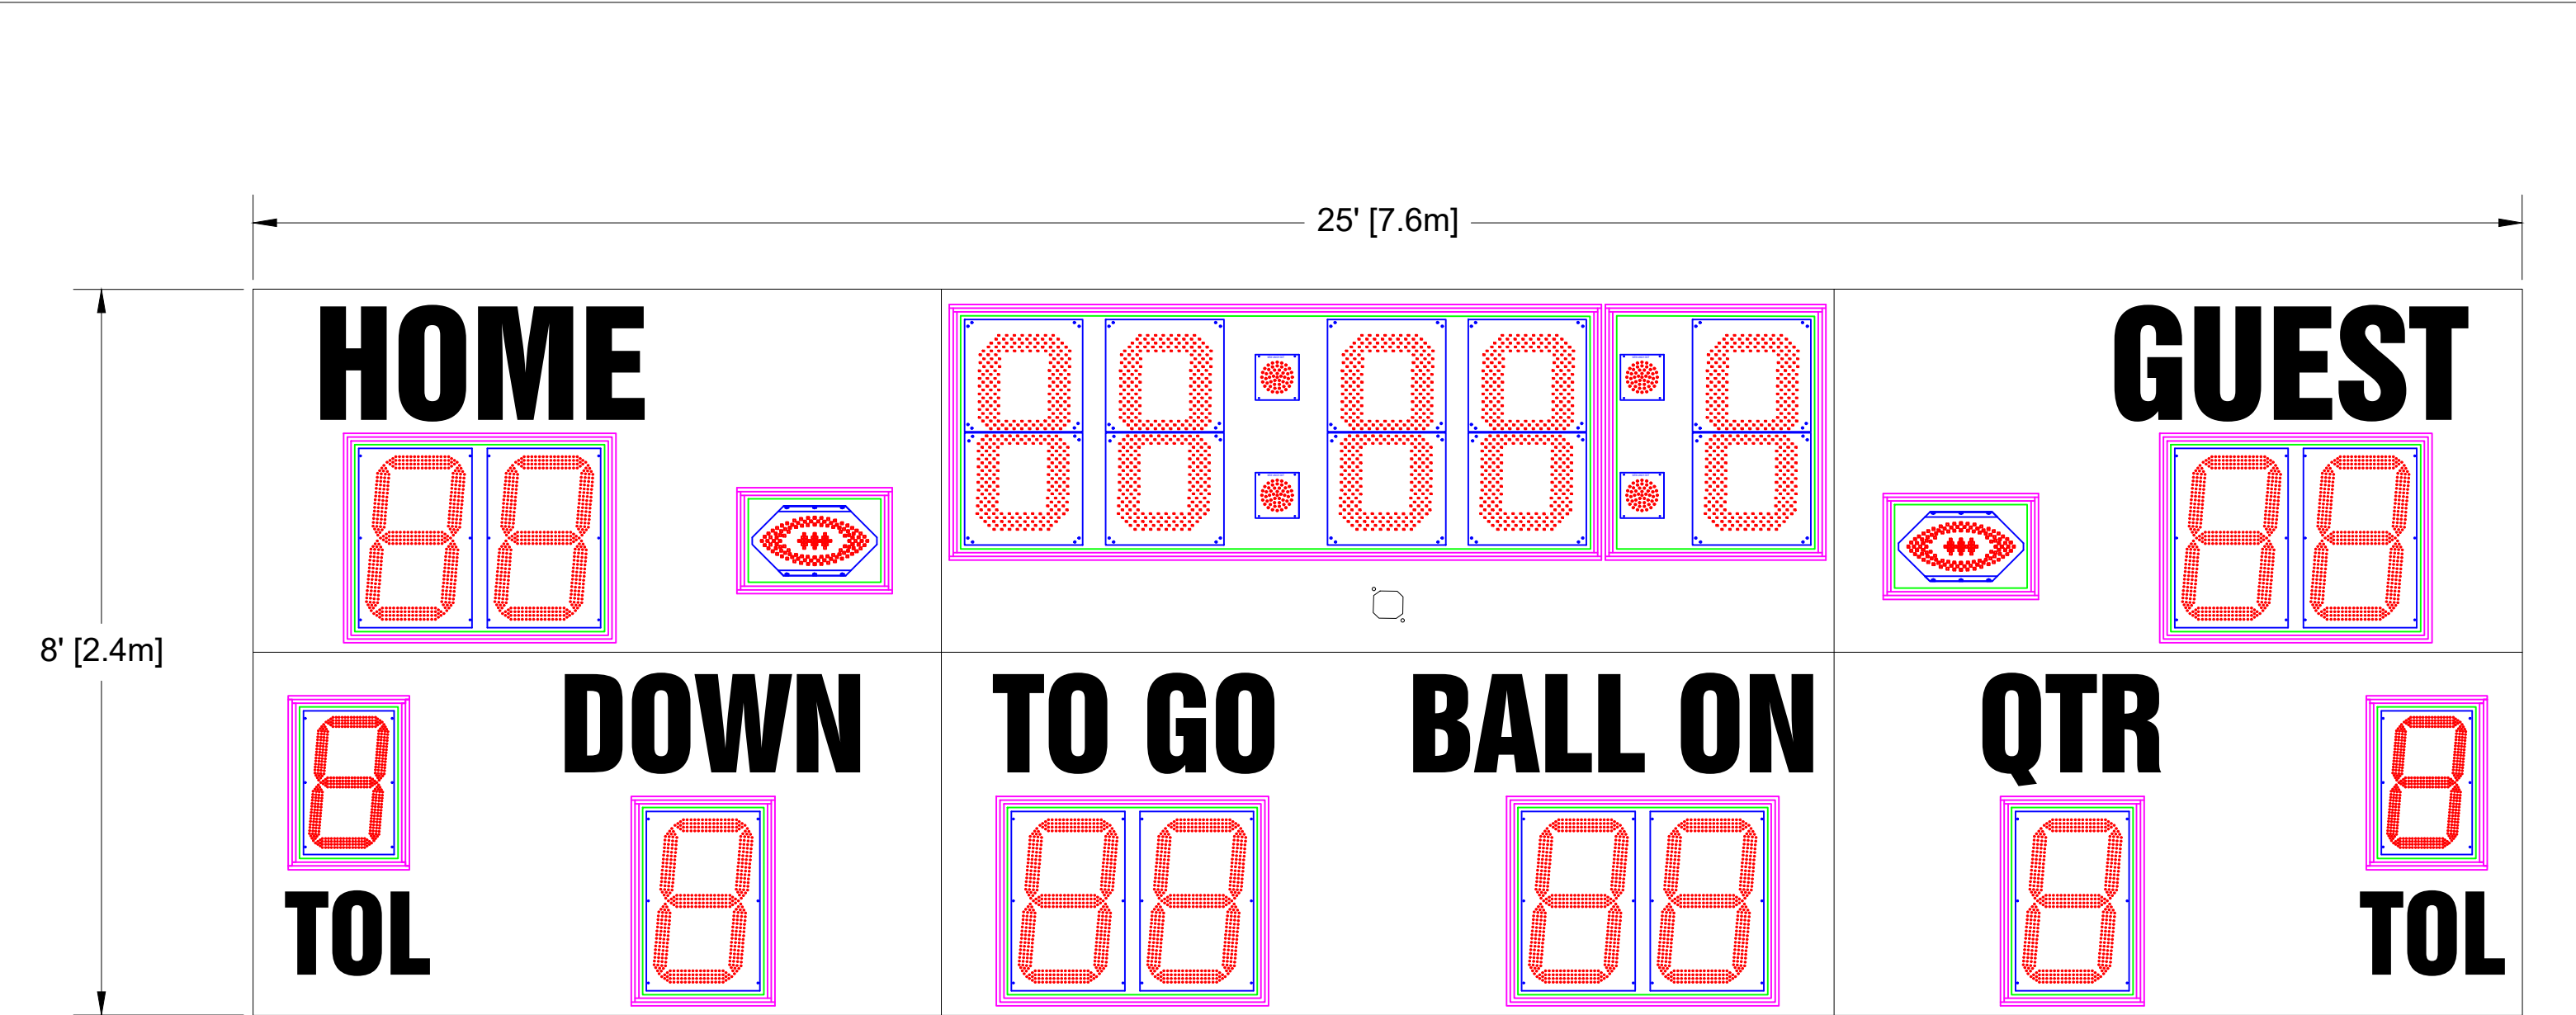

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1038 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.


Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.
All LED digits include the following:
* Shatter Resistant Lexan cover
* Conformal coating to protect from environmental conditions
* Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8025CxCV-T		SIZE A	INIT DRAWING DATE 12/18/21
USAGE USE FOR REVIEW		SCALE NTS	REV A
DRAWN BY CGTHOMPSON		PAGE 1 OF 1	

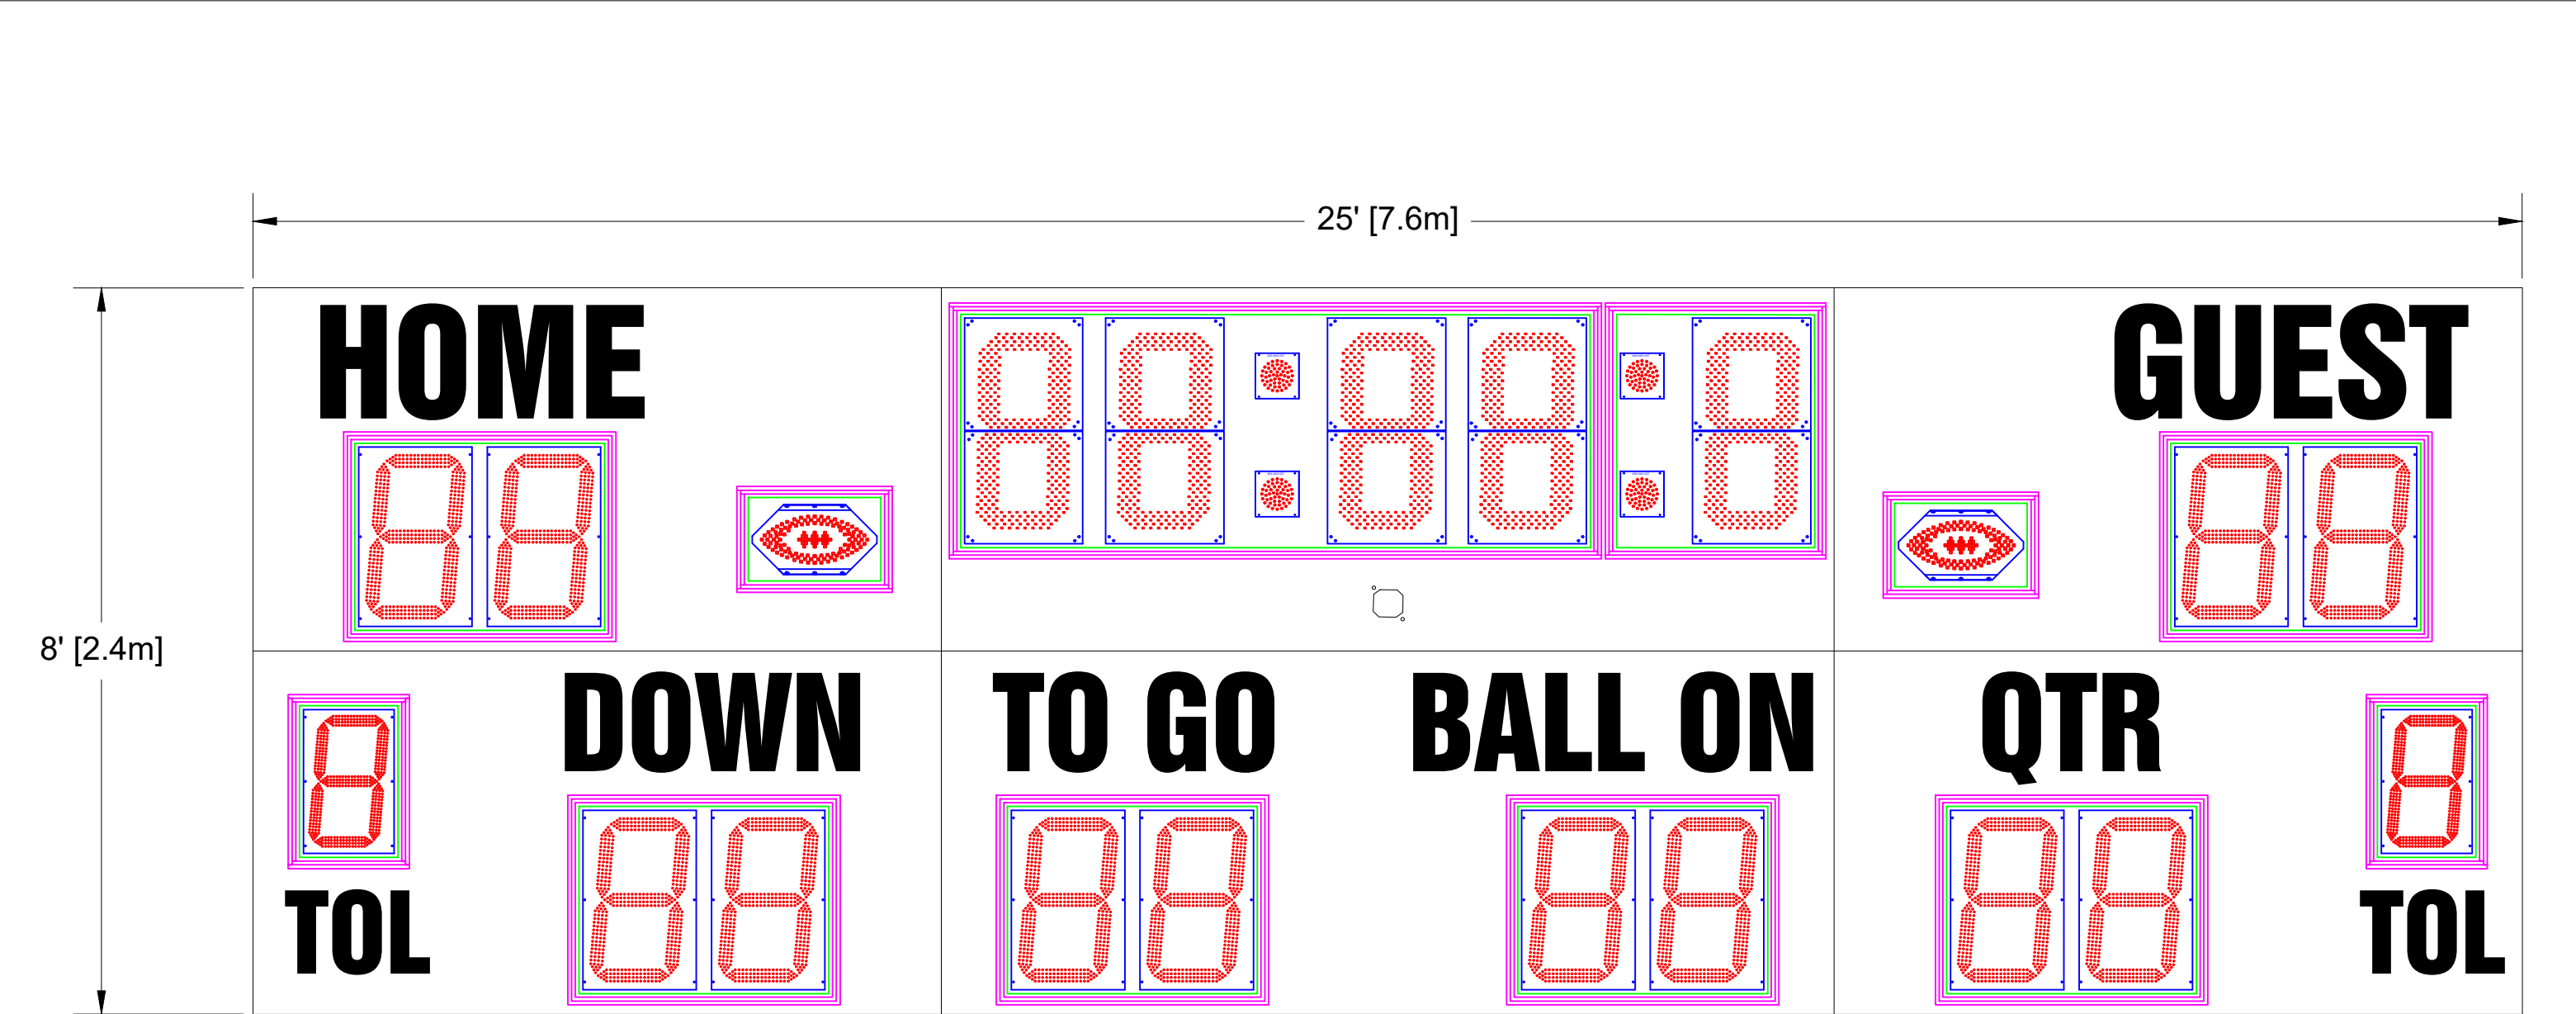

Scoreboard Specifications

Overall size: 25' (W) x 8' (H) x 6" (D)
Approximate Weight: 1056 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the BALL ON Digit.

30" LED Digits for TOD
22" LED Digits for HOME, GUEST, DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
13" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
11" White Vinyl Lettering for TOL

This Layout is for internal reference only.

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
SIZE A	FILENAME M8025CUXV-TF USAGE USE FOR REVIEW	INIT DRAWING DATE 12/18/21	REV A
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	