

SCOREBOARD SPECIFICATIONS

Overall size: 36' (W) x 9' 4" (H) x 6" (D)
Approximate Weight: 1587 lbs

30" LED Digits for **HOME, GUEST, TIME**
22" LED Digits for **DOWN, TO GO, BALL ON, QTR**
17" LED Digits for **TOL**

10" Electronic Team Names at **8** Ch
10" Electronic Captions at **6** Ch
10" Electronic Captions at **3** Ch

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:



- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
- MAX Current: **14.3 (x2)** Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: **20 (x2)** Amps

Incoming AC Mains (Power Cord) and Data Location:
Behind the BALL ON Digit.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2024-04-02	ELeClair

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div> <div>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2°</div>		<div><div>OES SCOREBOARDS</div><div>DESCRIPTION</div><div>OES ELECTRONIC SCOREBOARDS M8036AOCH-F</div></div>	
		<div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
THIRD ANGLE PROJECTION		SIZE B	FILENAME M8036AOCH-F INFO.idw
		INIT DRAWING DATE 2024-04-02	REV A
		USE FOR REVIEW	
SCALE NTS		DRAWN BY ELeClair	PAGE 1 OF 1

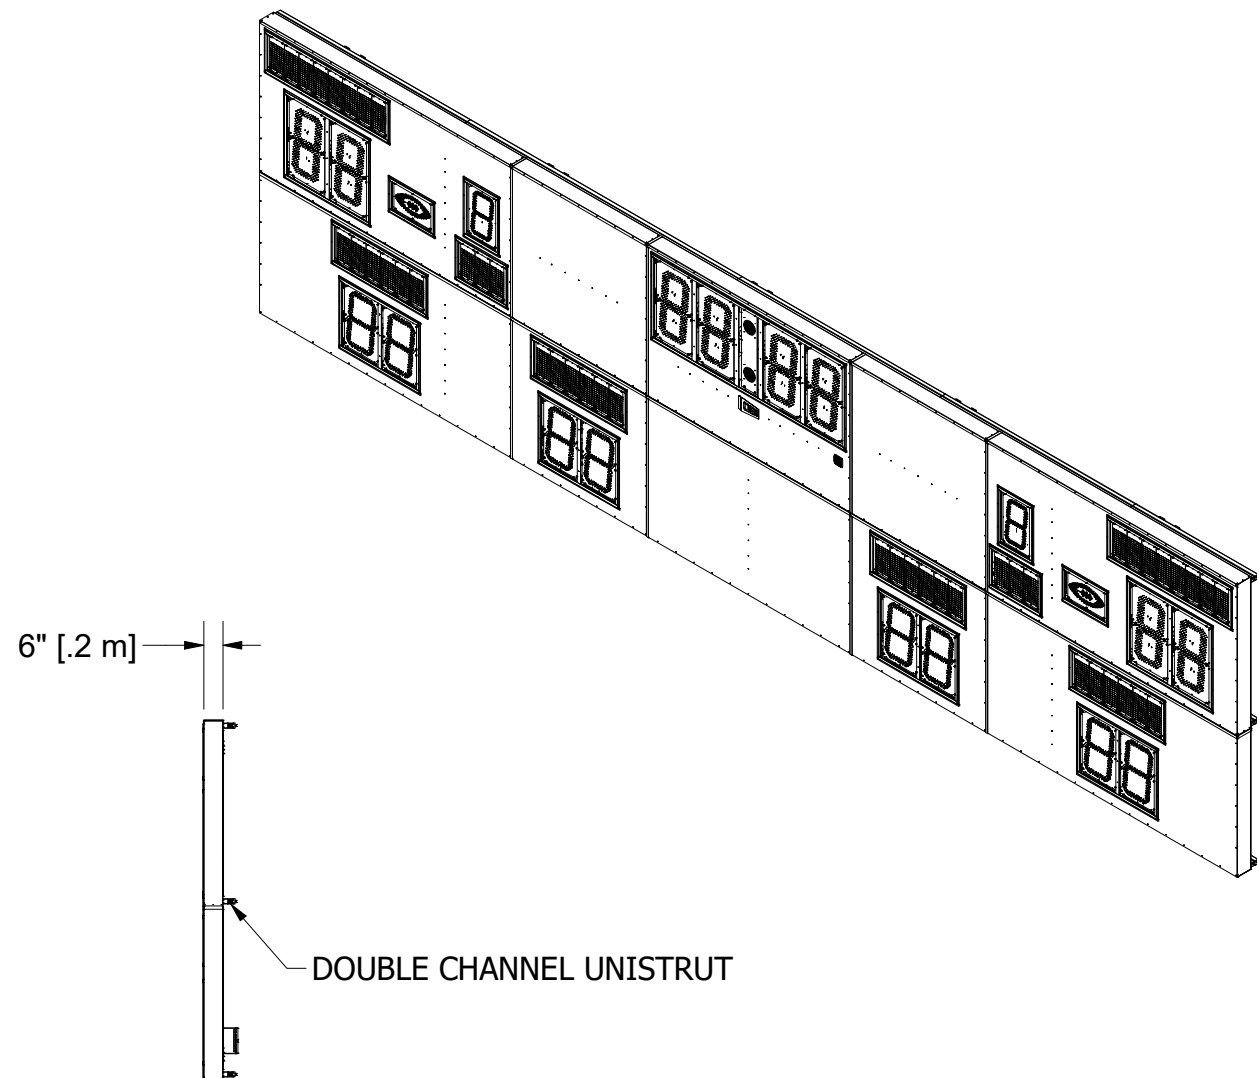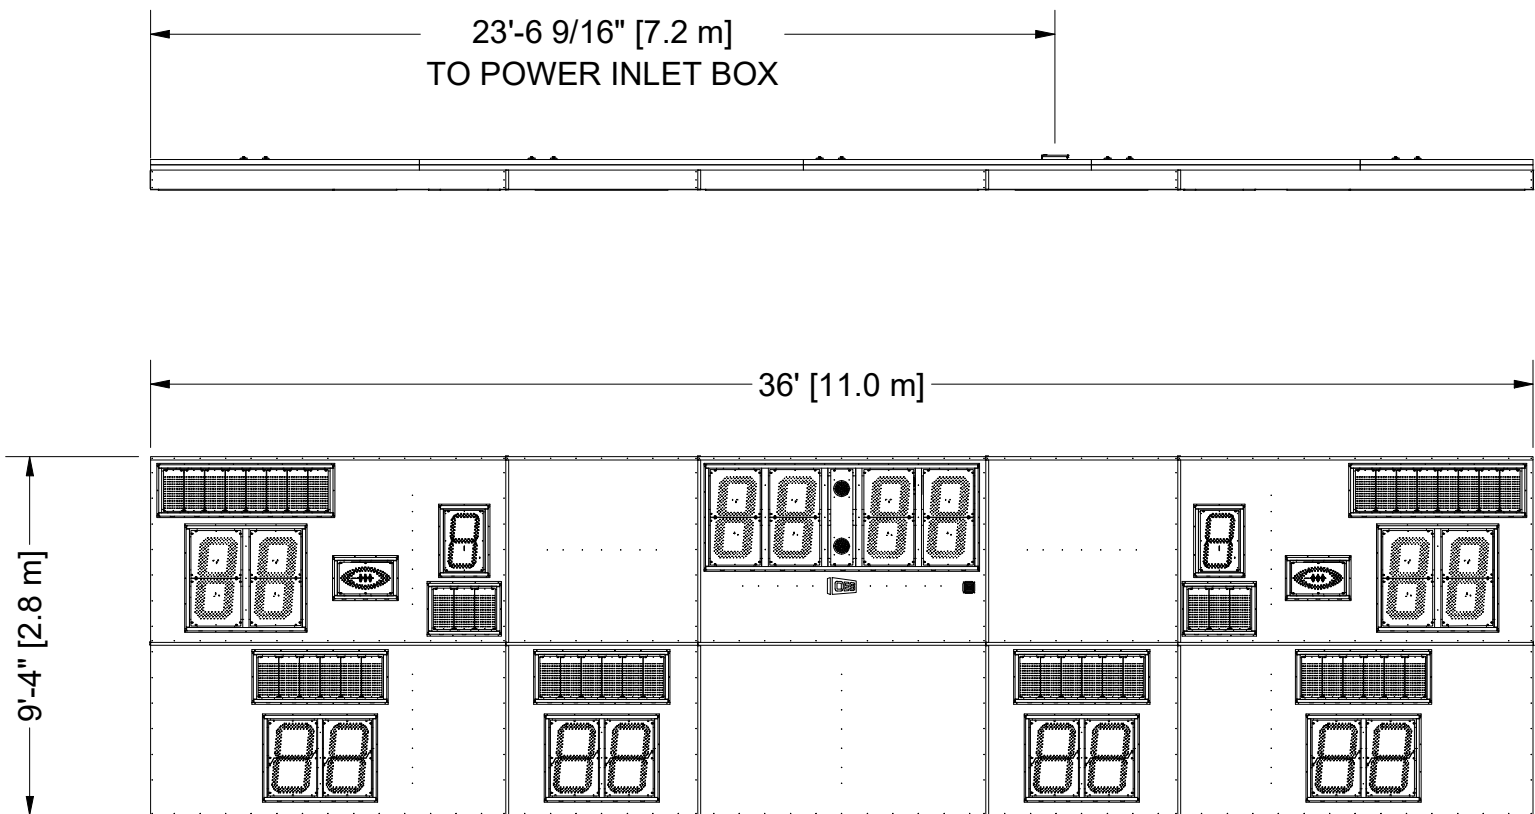

SCOREBOARD SPECIFICATIONS

- Overall size: 36' (W) x 9' 4" (H) x 6" (D)
Approximate Weight: 1549 lbs
- 30" LED Digits for **HOME, GUEST, TIME**
22" LED Digits for **DOWN, TO GO, BALL ON, QTR**
17" LED Digits for **TOL**
- 10" Electronic Team Names at 8 Ch
10" Electronic Captions at 6 Ch
10" Electronic Captions at 3 Ch

All LED digits include the following:


- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

- Electrical Ratings:
- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
 - MAX Current: **14.3 (x2)** Amps
 - AC Current Rating of Fuse or Circuit Breaker within SB: **20 (x2)** Amps
- Incoming AC Mains (Power Cord) and Data Location:
Behind the BALL ON Digit.
- Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2024-04-02	ELeClair

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</div> <div>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 2°</div>		<div>THIRD ANGLE PROJECTION</div> <div></div>	
B	DESCRIPTION	OES ELECTRONIC SCOREBOARDS M8036AUCH-F	
	FILENAME	INIT DRAWING DATE	REV
M8036AUCH-F INFO.idw		2024-04-02	A
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	ELeClair
		PAGE 1 OF 1	

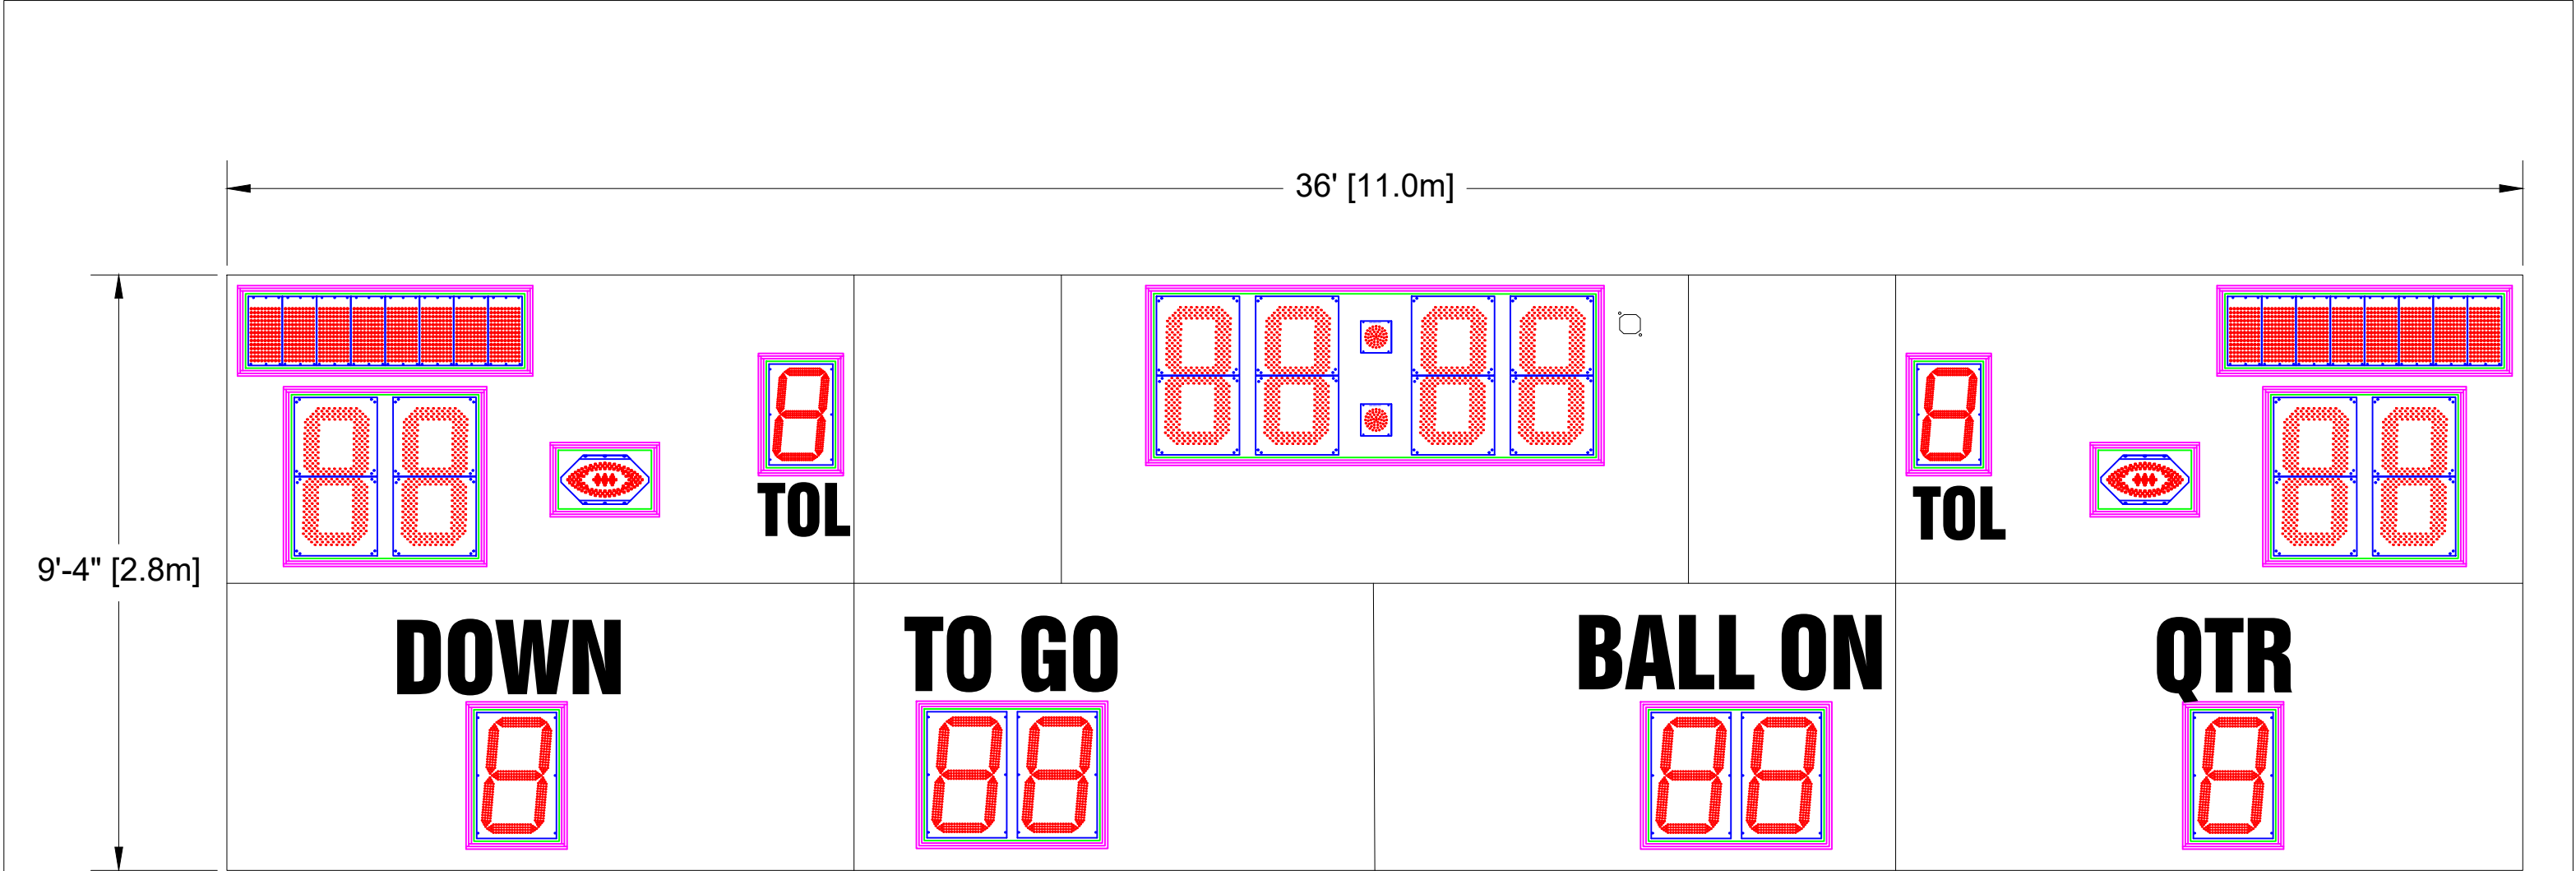

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1484 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters

14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/19/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES INC. 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8036AxCE	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXE	12/19/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1

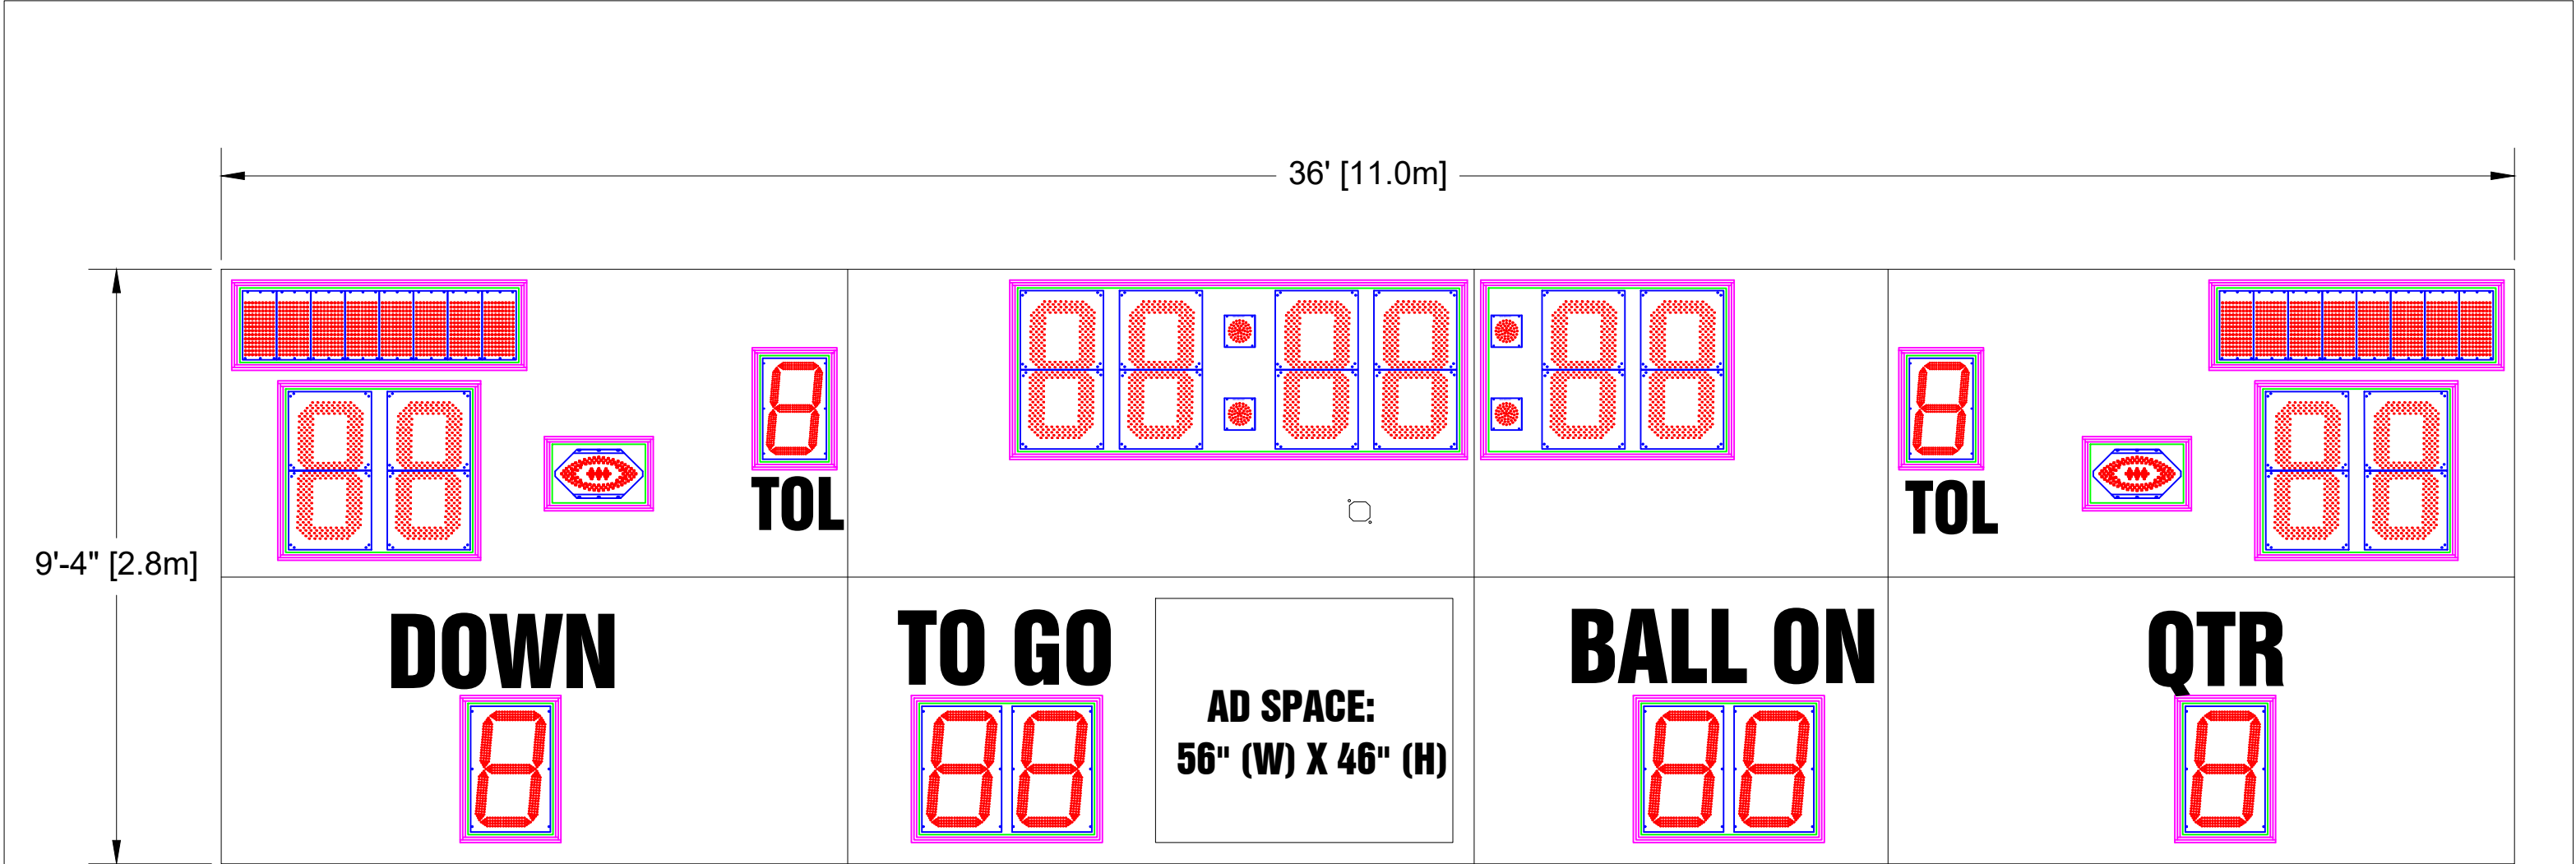

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1515 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters

14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle


REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	4/1/2020

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXE-H	4/1/20	A
USAGE			
USE FOR REVIEW			
SCALE	NTS	DRAWN BY	PAGE
		CGTHOMPSON	1 OF 1

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

DESCRIPTION

OES ELECTRONIC SCOREBOARDS
M8036AxCE-H

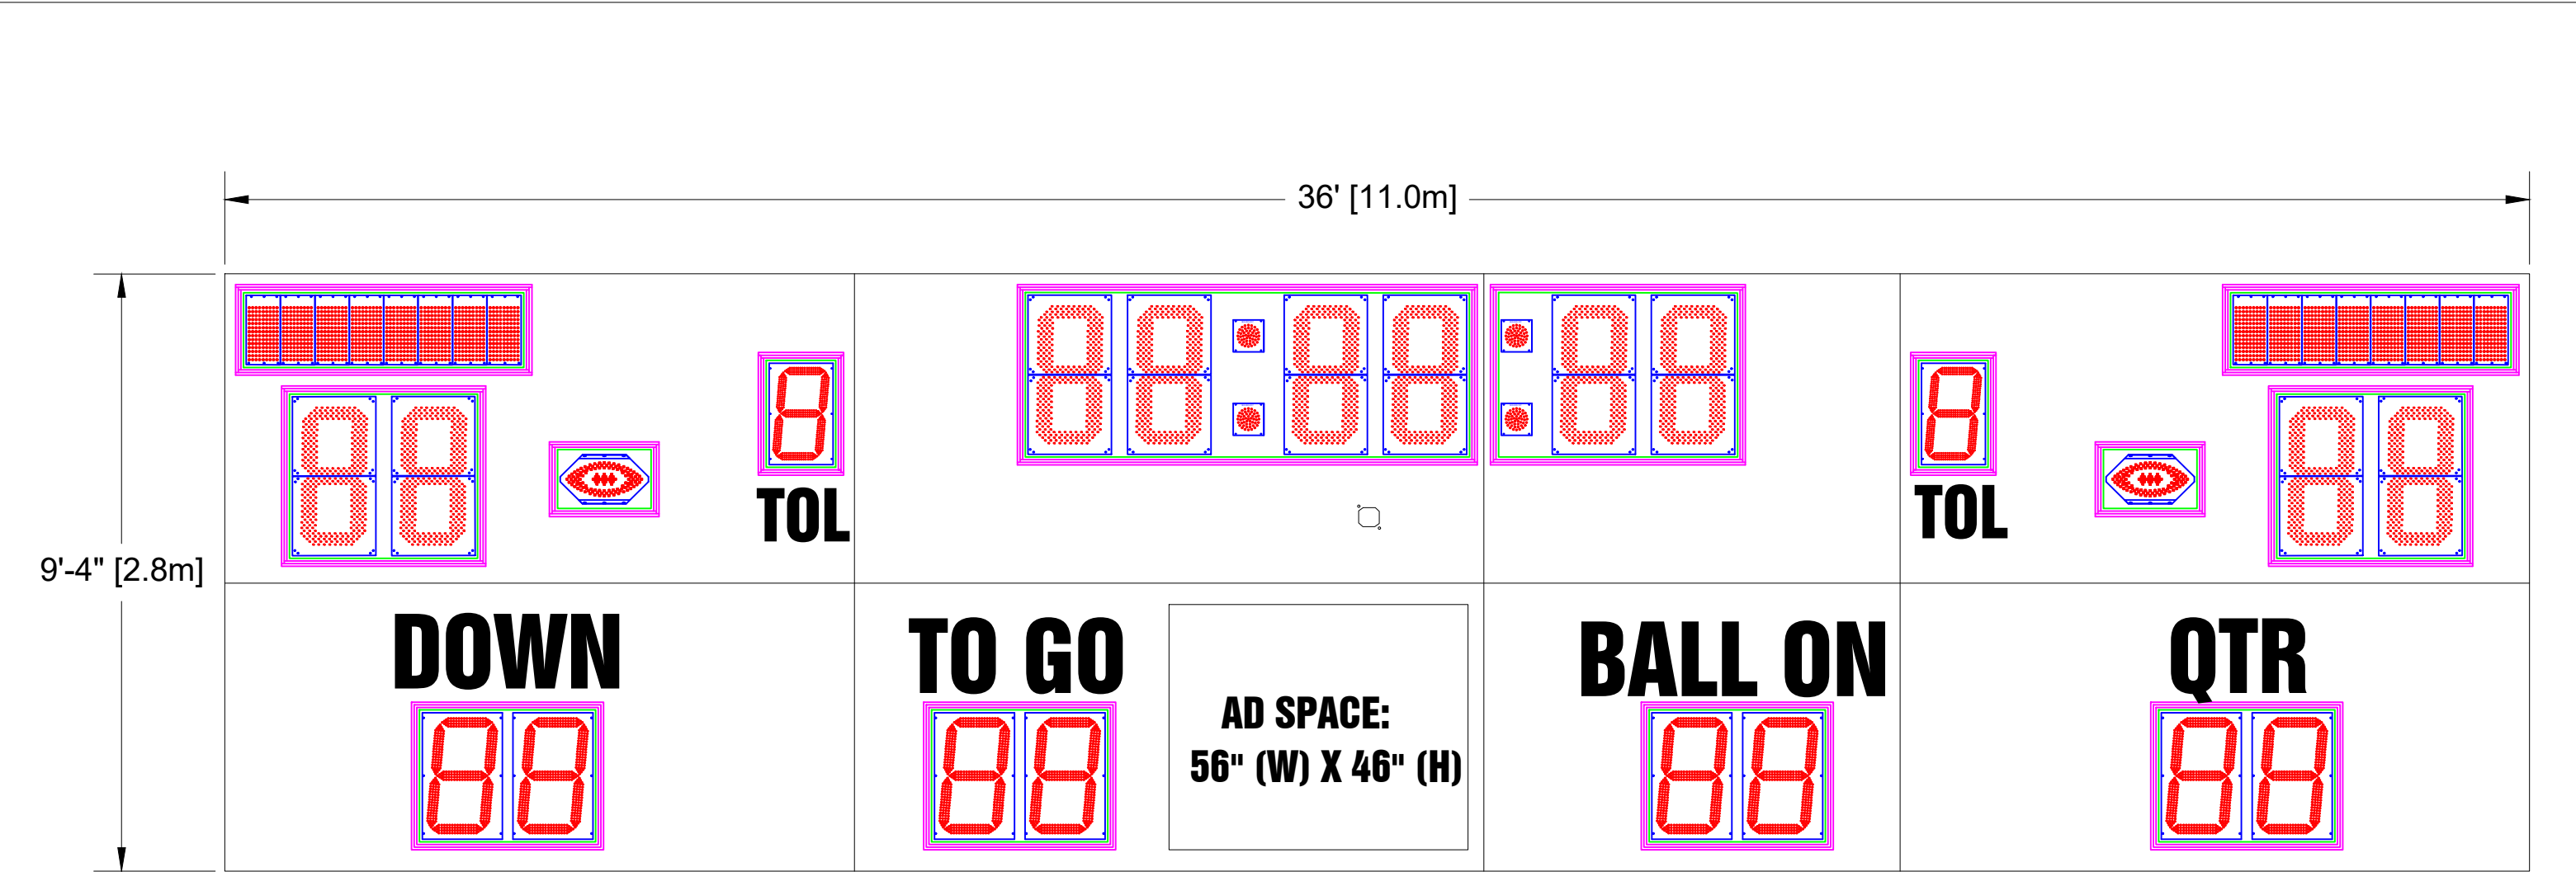

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1536 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters

14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	4/1/2020
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES ELECTRONIC SCOREBOARDS M8036AxCE-HF	
SIZE A		FILENAME M8036AUXE-HF	INIT DRAWING DATE 4/1/20
SCALE NTS		USAGE USE FOR REVIEW	REV A
DRAWN BY CGTHOMPSON		PAGE 1 OF 1	

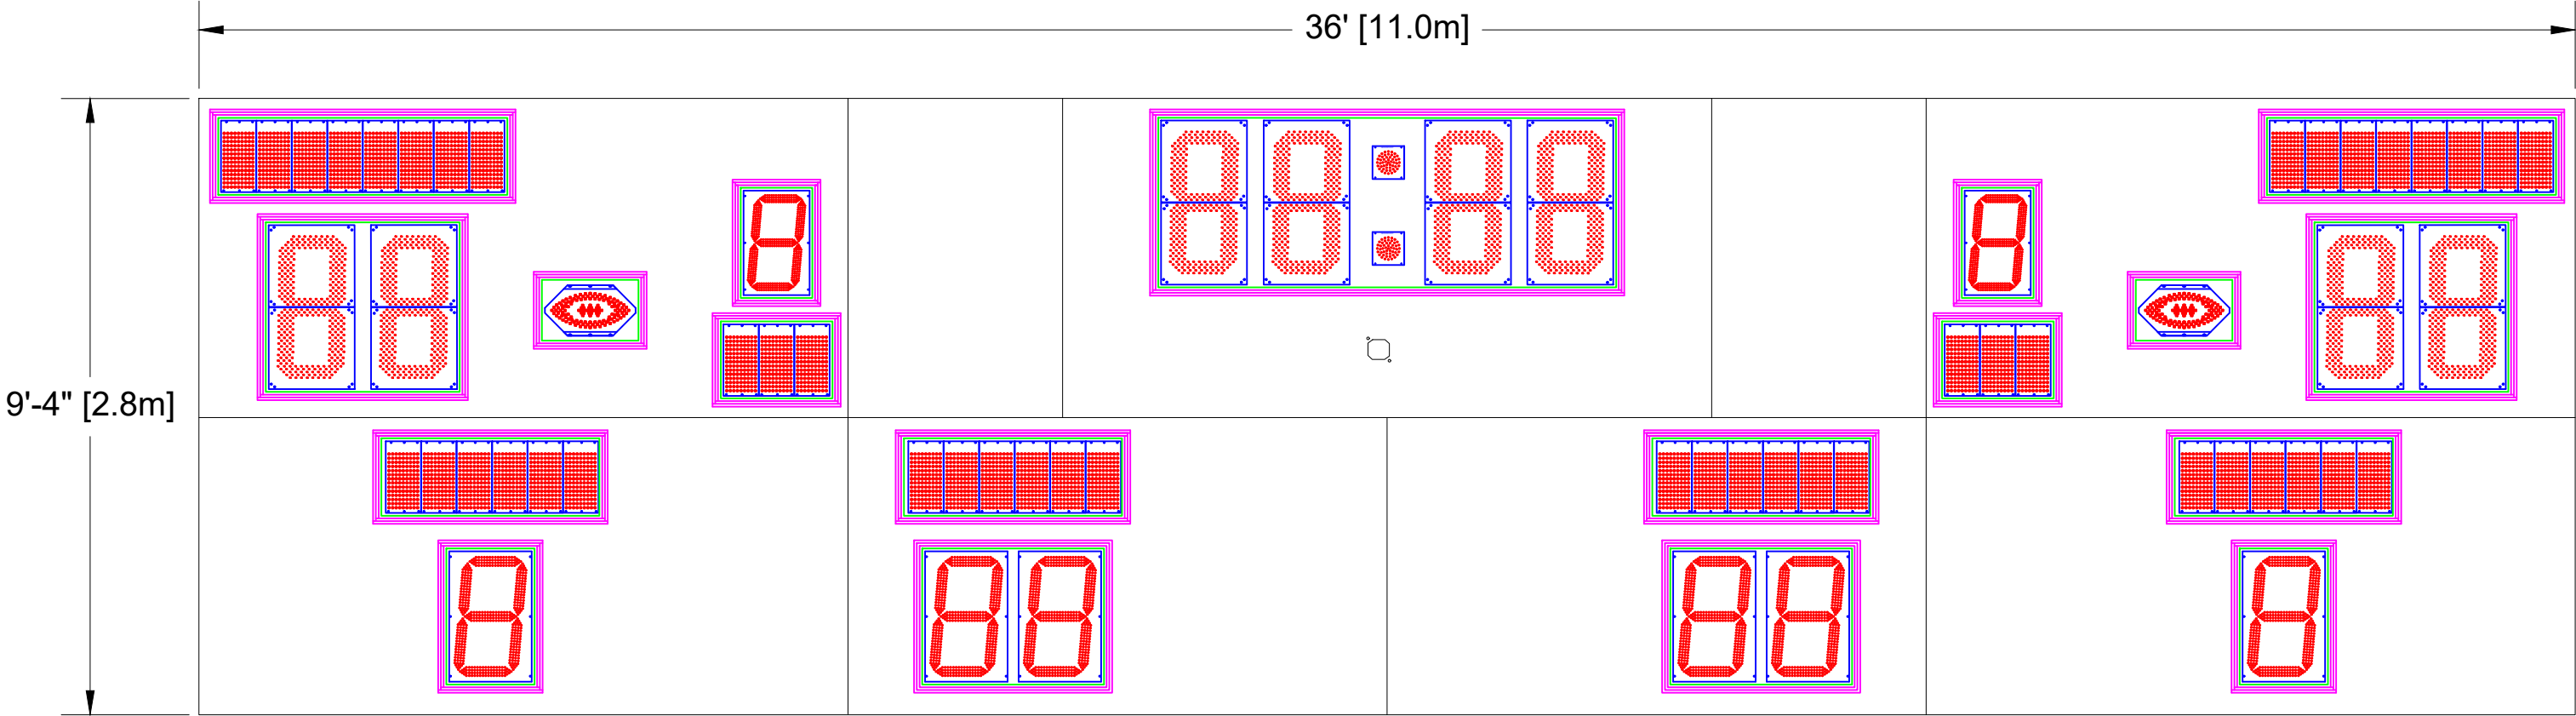

Scoreboard Specifications


Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1562 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/19/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8036AxCH	
SIZE A		FILENAME M8036AUXH	INIT DRAWING DATE 12/19/21
USAGE USE FOR REVIEW		REV A	
SCALE NTS		DRAWN BY CGTHOMPSON	
		PAGE 1 OF 1	

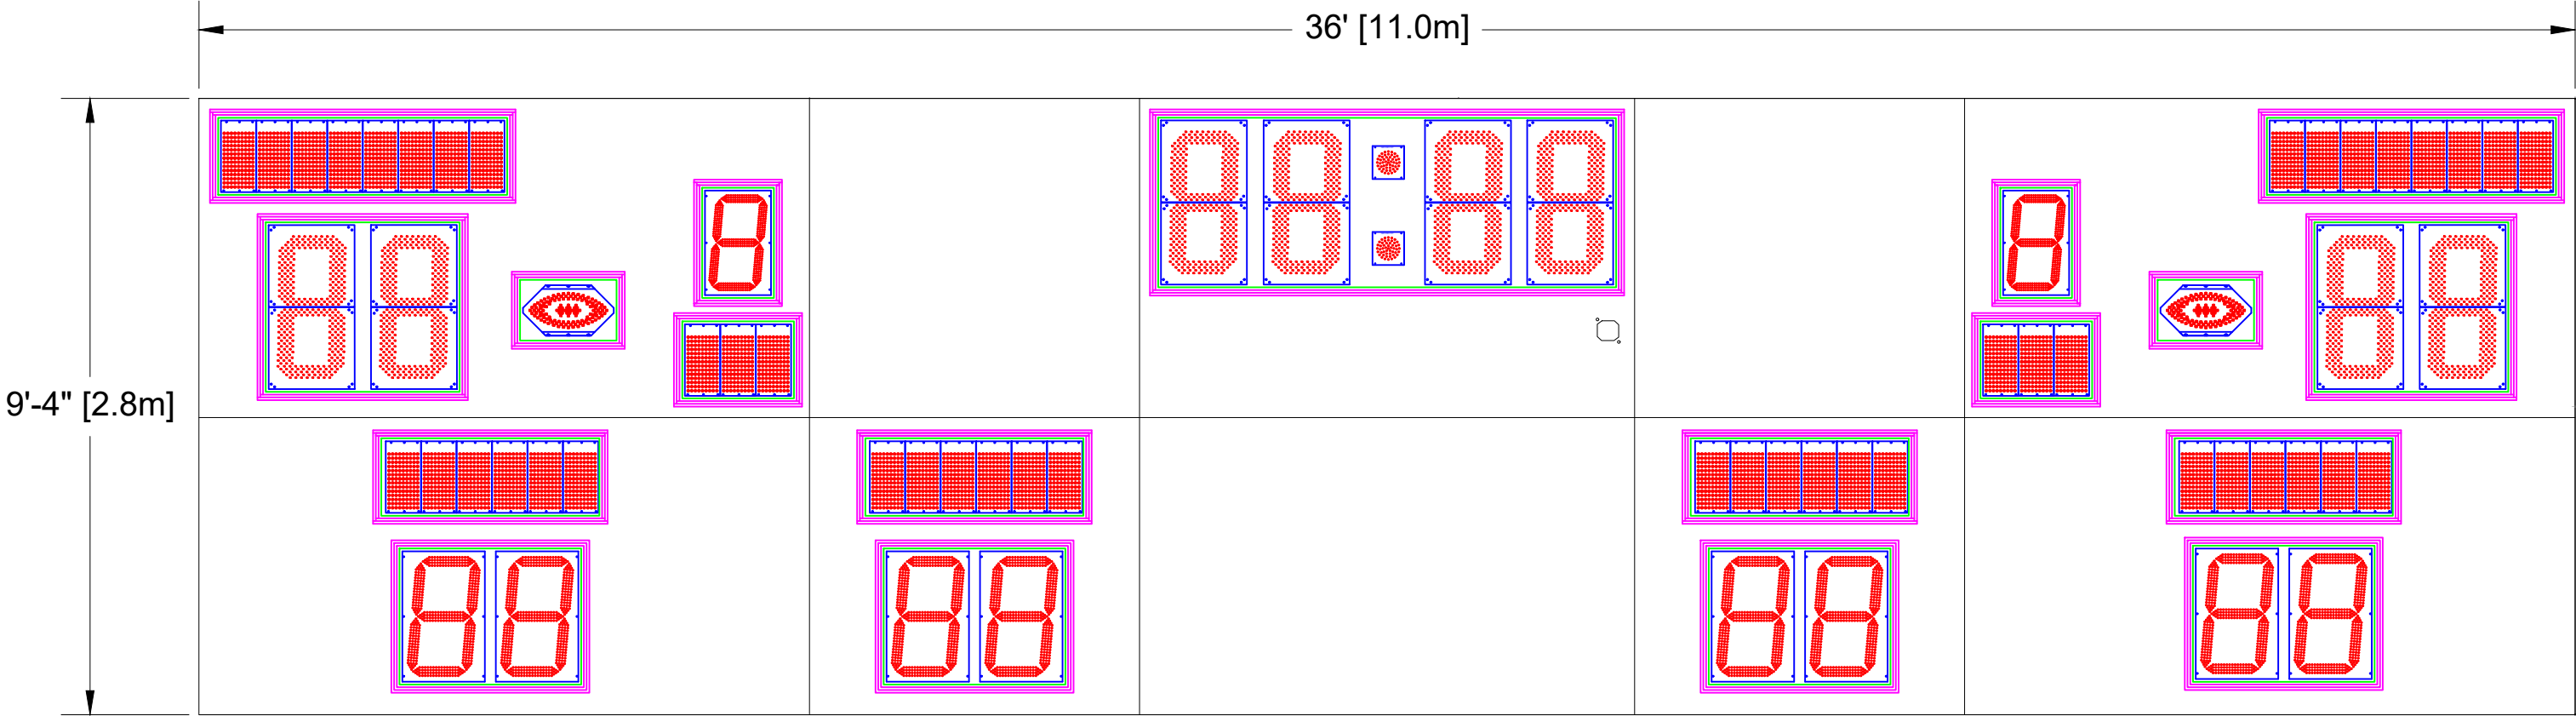

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1601 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

All LED digits include the following:

- * Shatter Resistant Lexan cover
- * Conformal coating to protect from environmental conditions
- * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/20/2024
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES ELECTRONIC SCOREBOARDS M8036AUXH-F	
SIZE A	FILENAME M8036AUXH-F	INIT DRAWING DATE 3/20/24	REV A
SCALE NTS		DRAWN BY ELECCLAIR	
PAGE 1 OF 1		USE FOR REVIEW	

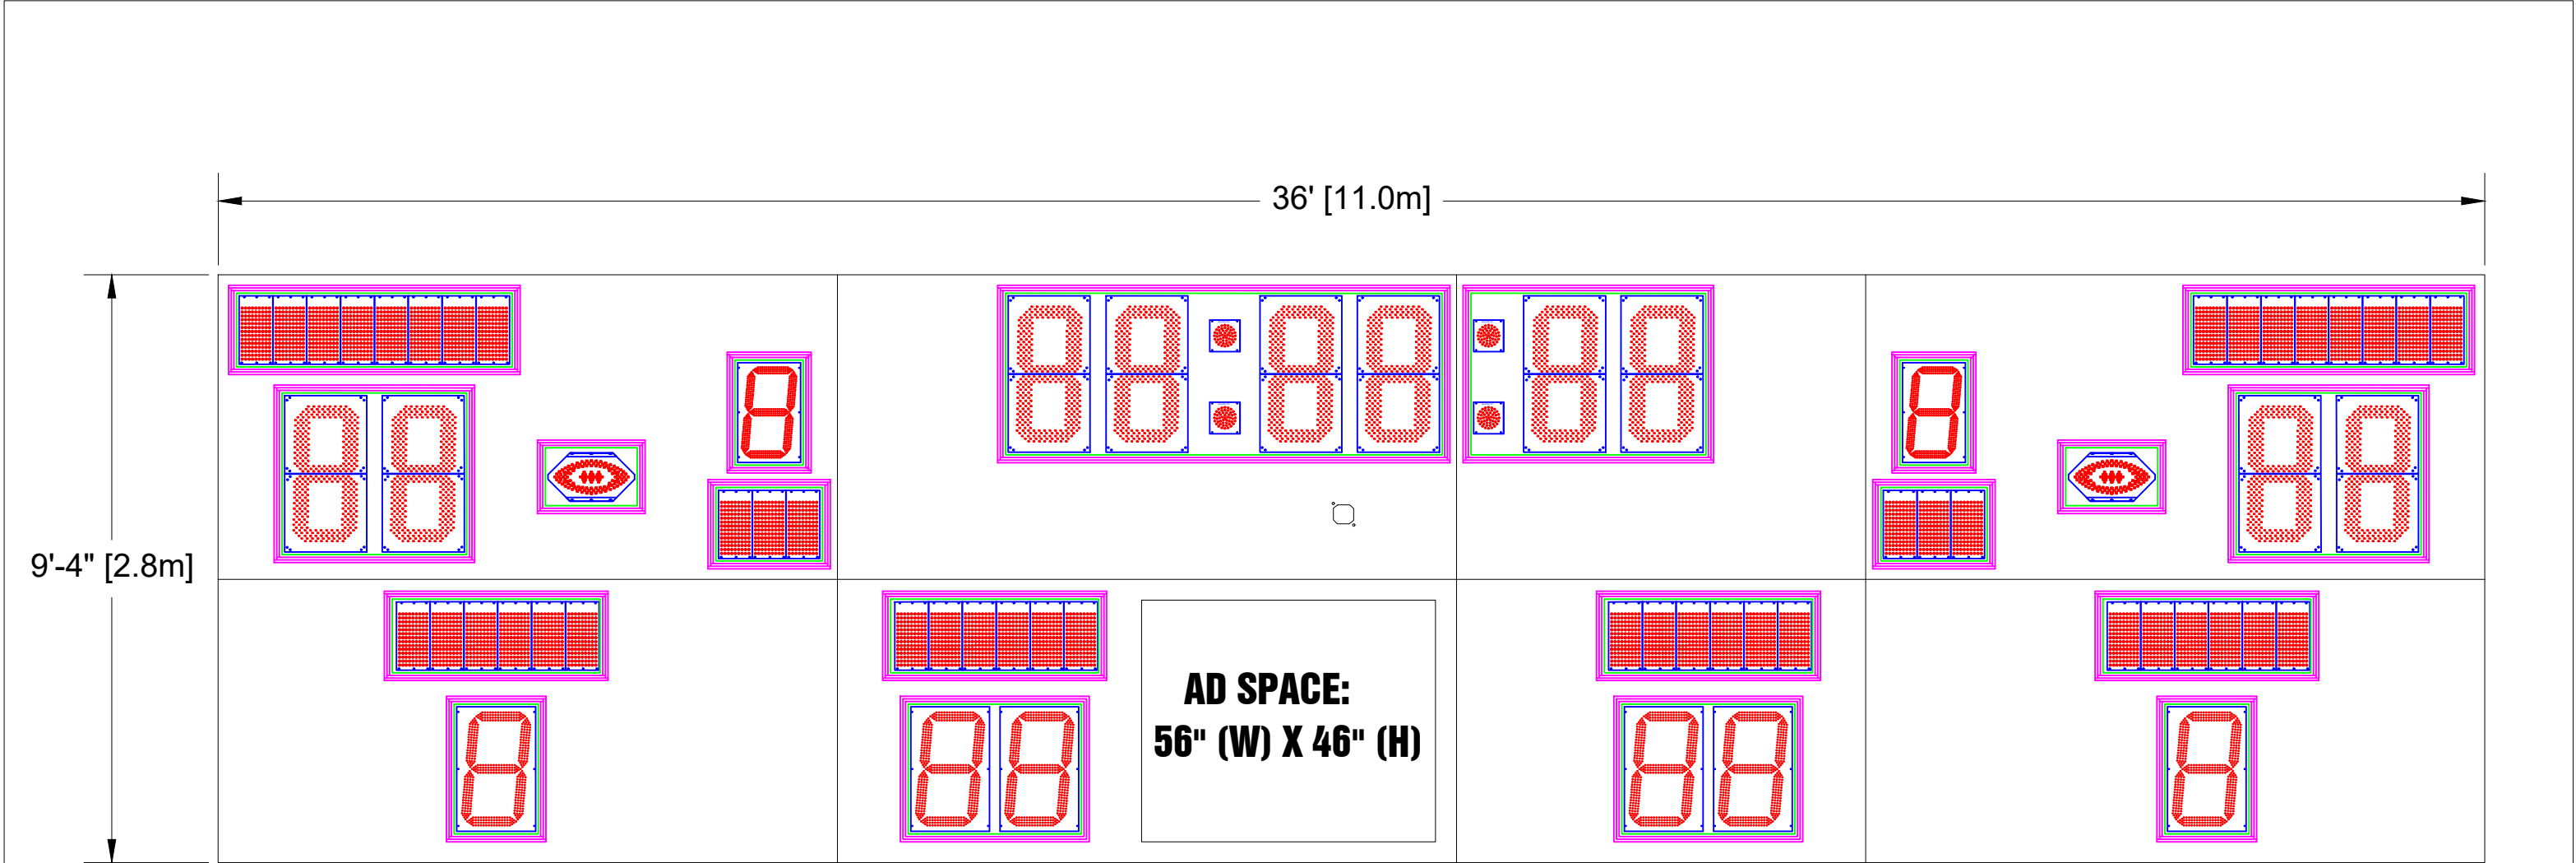

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1595 lbs
Incoming Mains Power: (3x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).


30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

		<div><div></div><div>OES</div><div>SCOREBOARDS</div></div> <div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div>	
<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M8036AxCH-H</div>	
SIZE A	FILENAME M8036AUXH-H USAGE	INIT DRAWING DATE 12/18/21	REV A
SCALE NTS		DRAWN BY CGTHOMPSON	
		PAGE 1 OF 1	

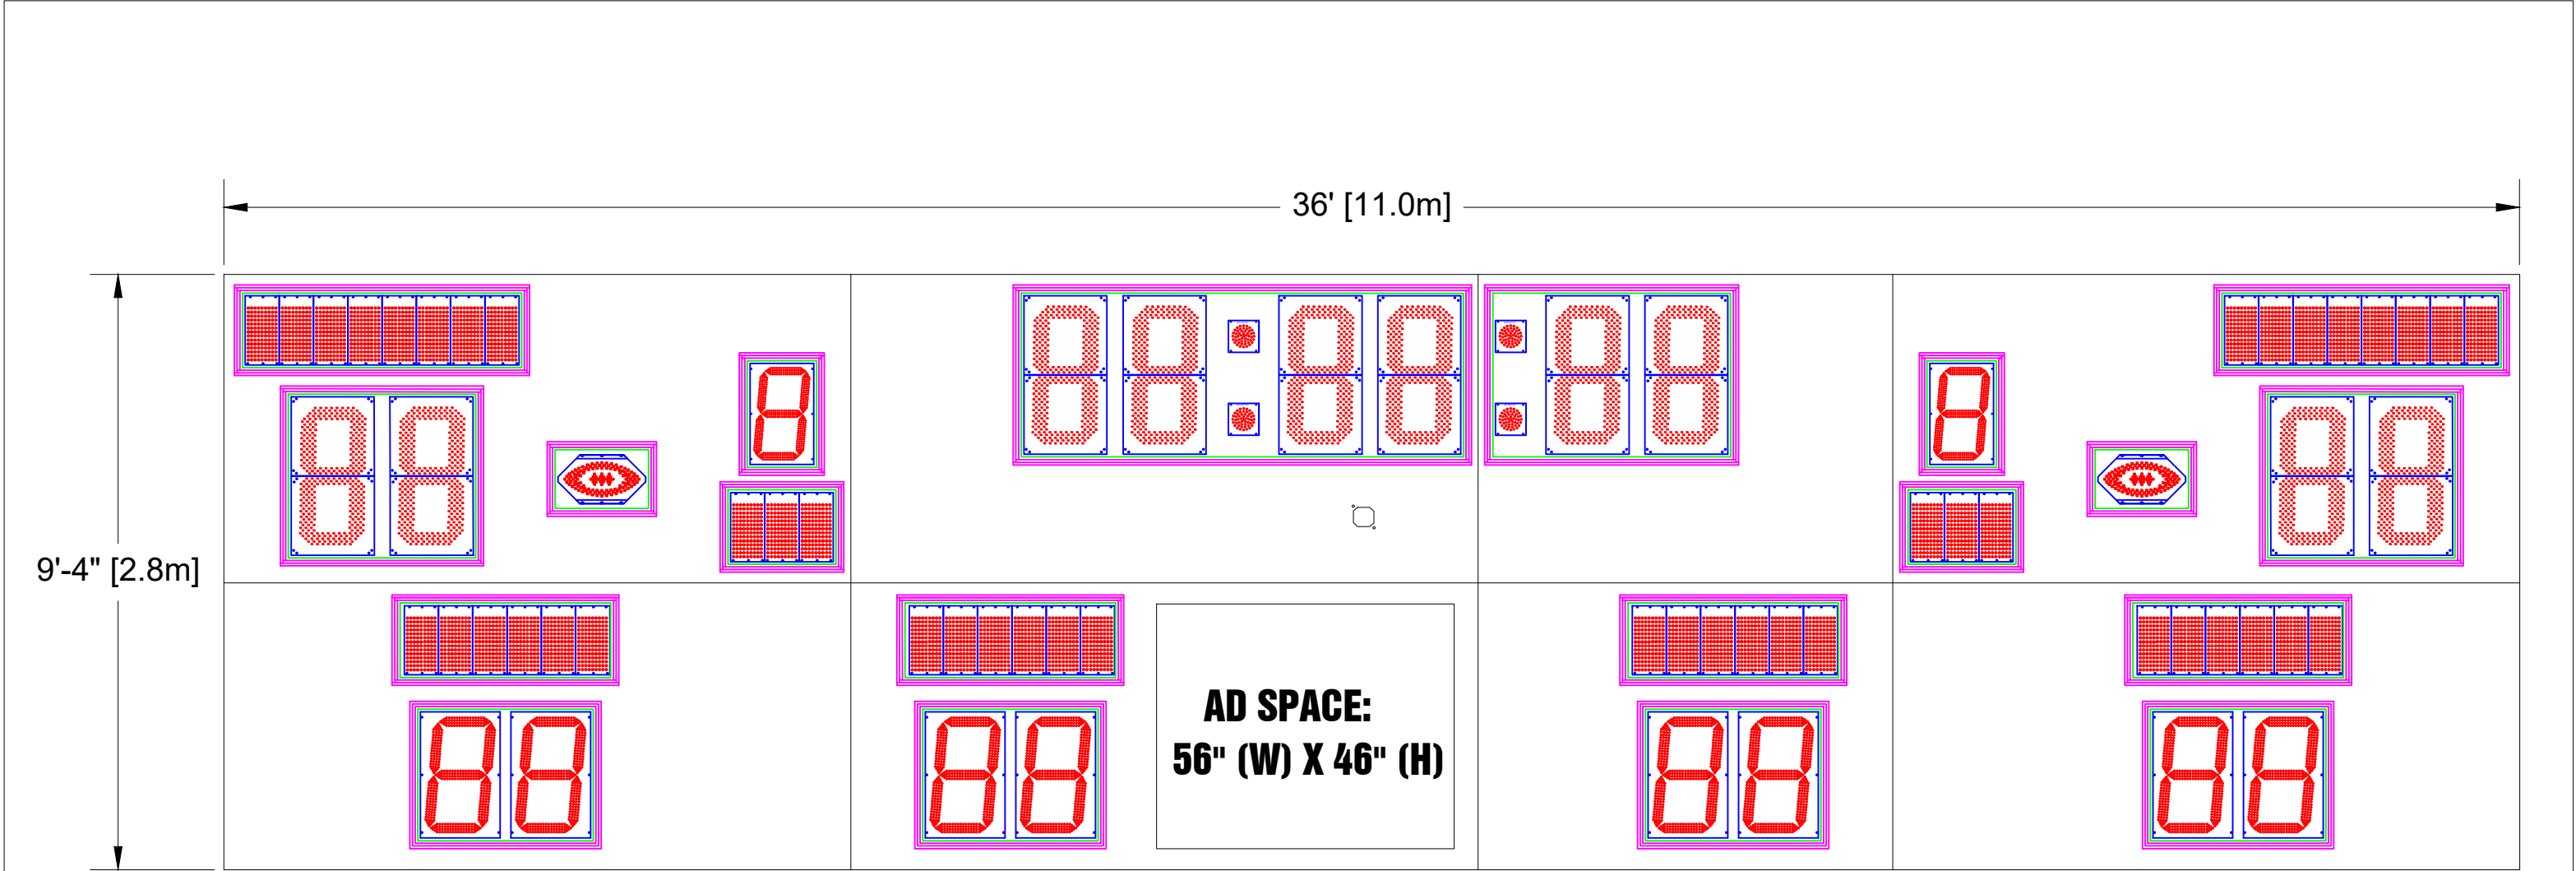

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1617 lbs
Incoming Mains Power: (3x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL


10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/18/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES, INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	

OES SCOREBOARDS			
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8036AxCH-HF			
SIZE A	FILENAME M8036AUXH-HF USAGE USE FOR REVIEW	INIT DRAWING DATE 12/18/21	REV A
SCALE NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1	

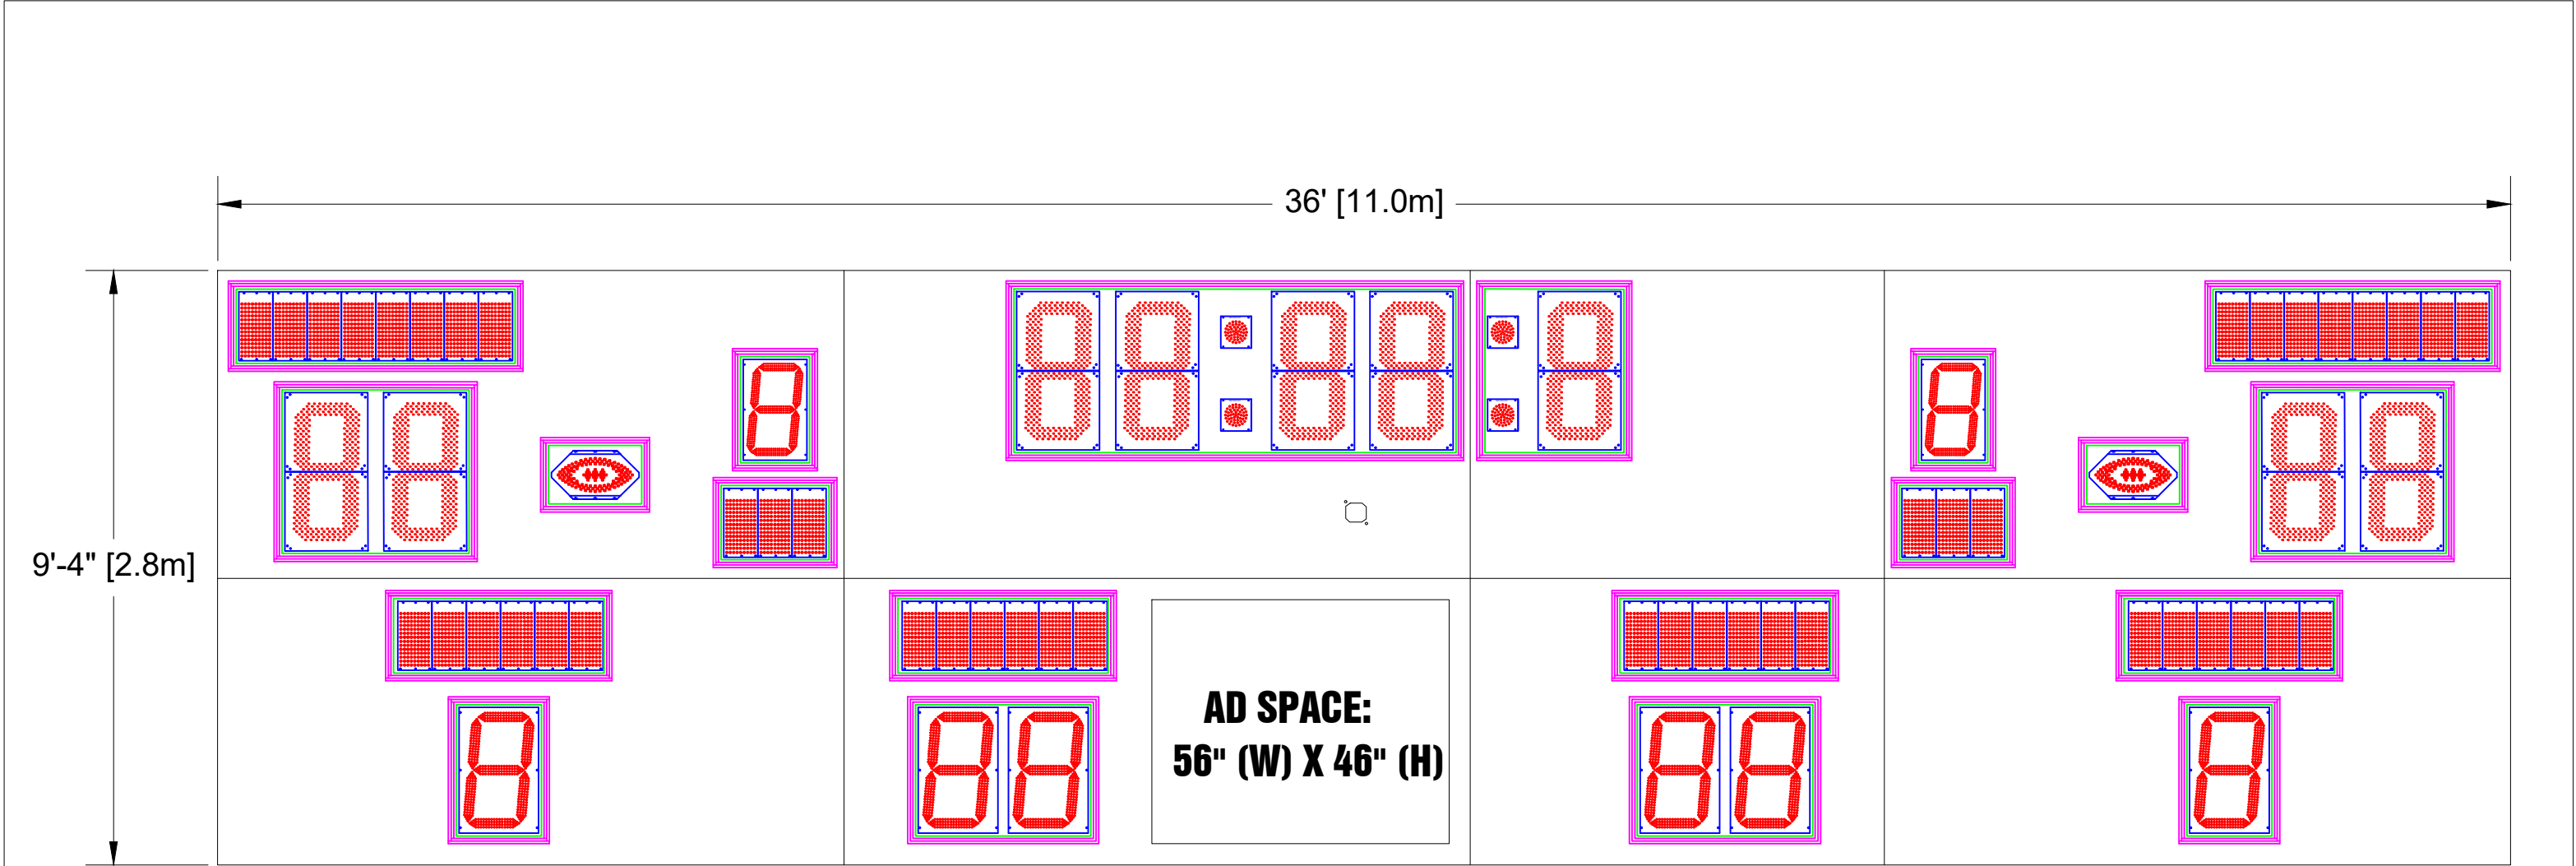

Scoreboard Specifications


Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1577 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 20 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/21/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:		OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		OES INC. 4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8036AxCH-T	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXH-T	5/21/21	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY CGTHOMPSON	PAGE 1 OF 1

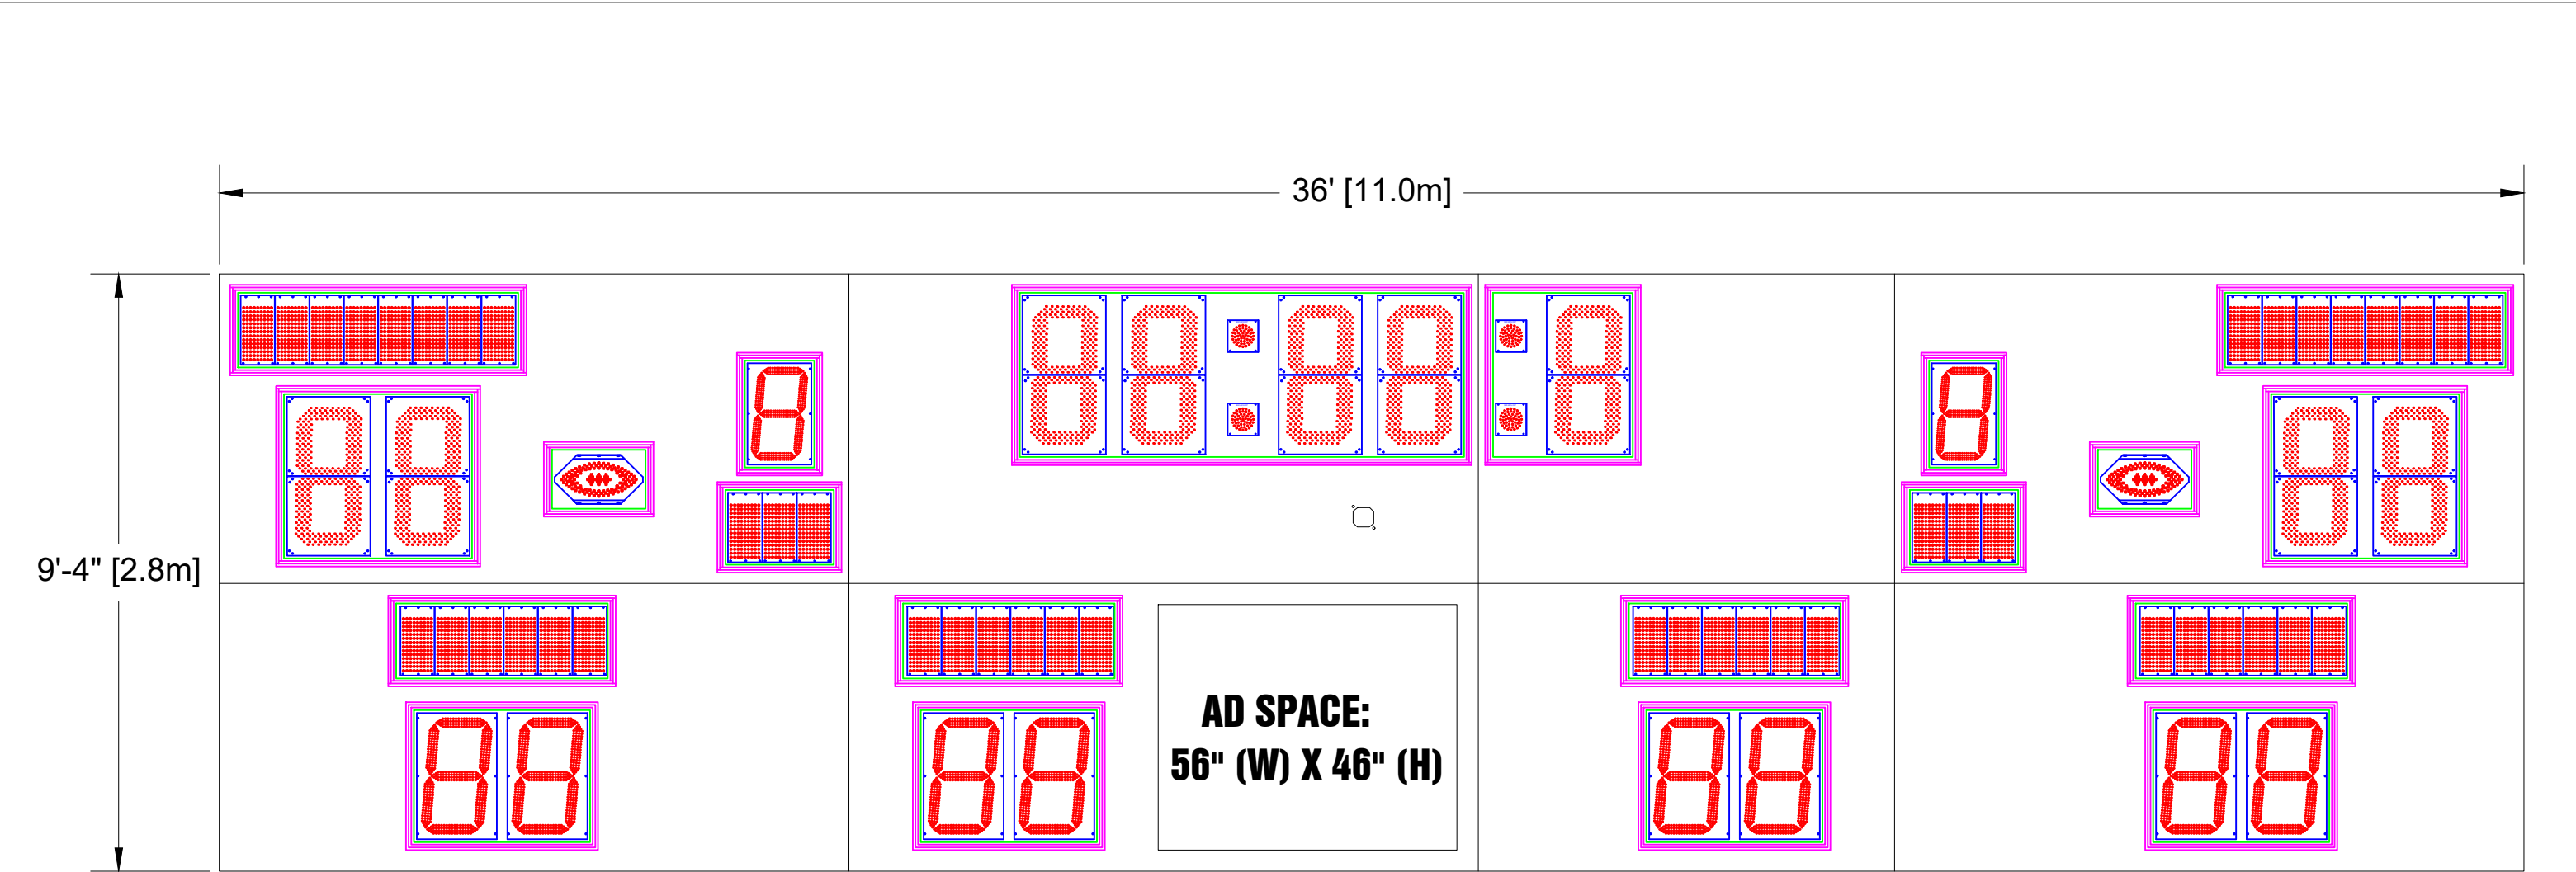

Scoreboard Specifications


Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1601 lbs
Incoming Mains Power: (3x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

10" Electronic Team Names of 8 characters
10" Electronic Captions of 6 characters
10" Electronic Captions of 3 characters

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	12/19/2021
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:			
OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
TOLERANCE INFORMATION Dimensions are in Inches		THIRD ANGLE PROJECTIONS	
Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		DESCRIPTION OES ELECTRONIC SCOREBOARDS M8036AxCH-TF	
SIZE A		FILENAME M8036AUXH-TF	INIT DRAWING DATE 12/19/21
		USAGE USE FOR REVIEW	
SCALE NTS		DRAWN BY CGTHOMPSON	REV A
		PAGE 1 OF 1	

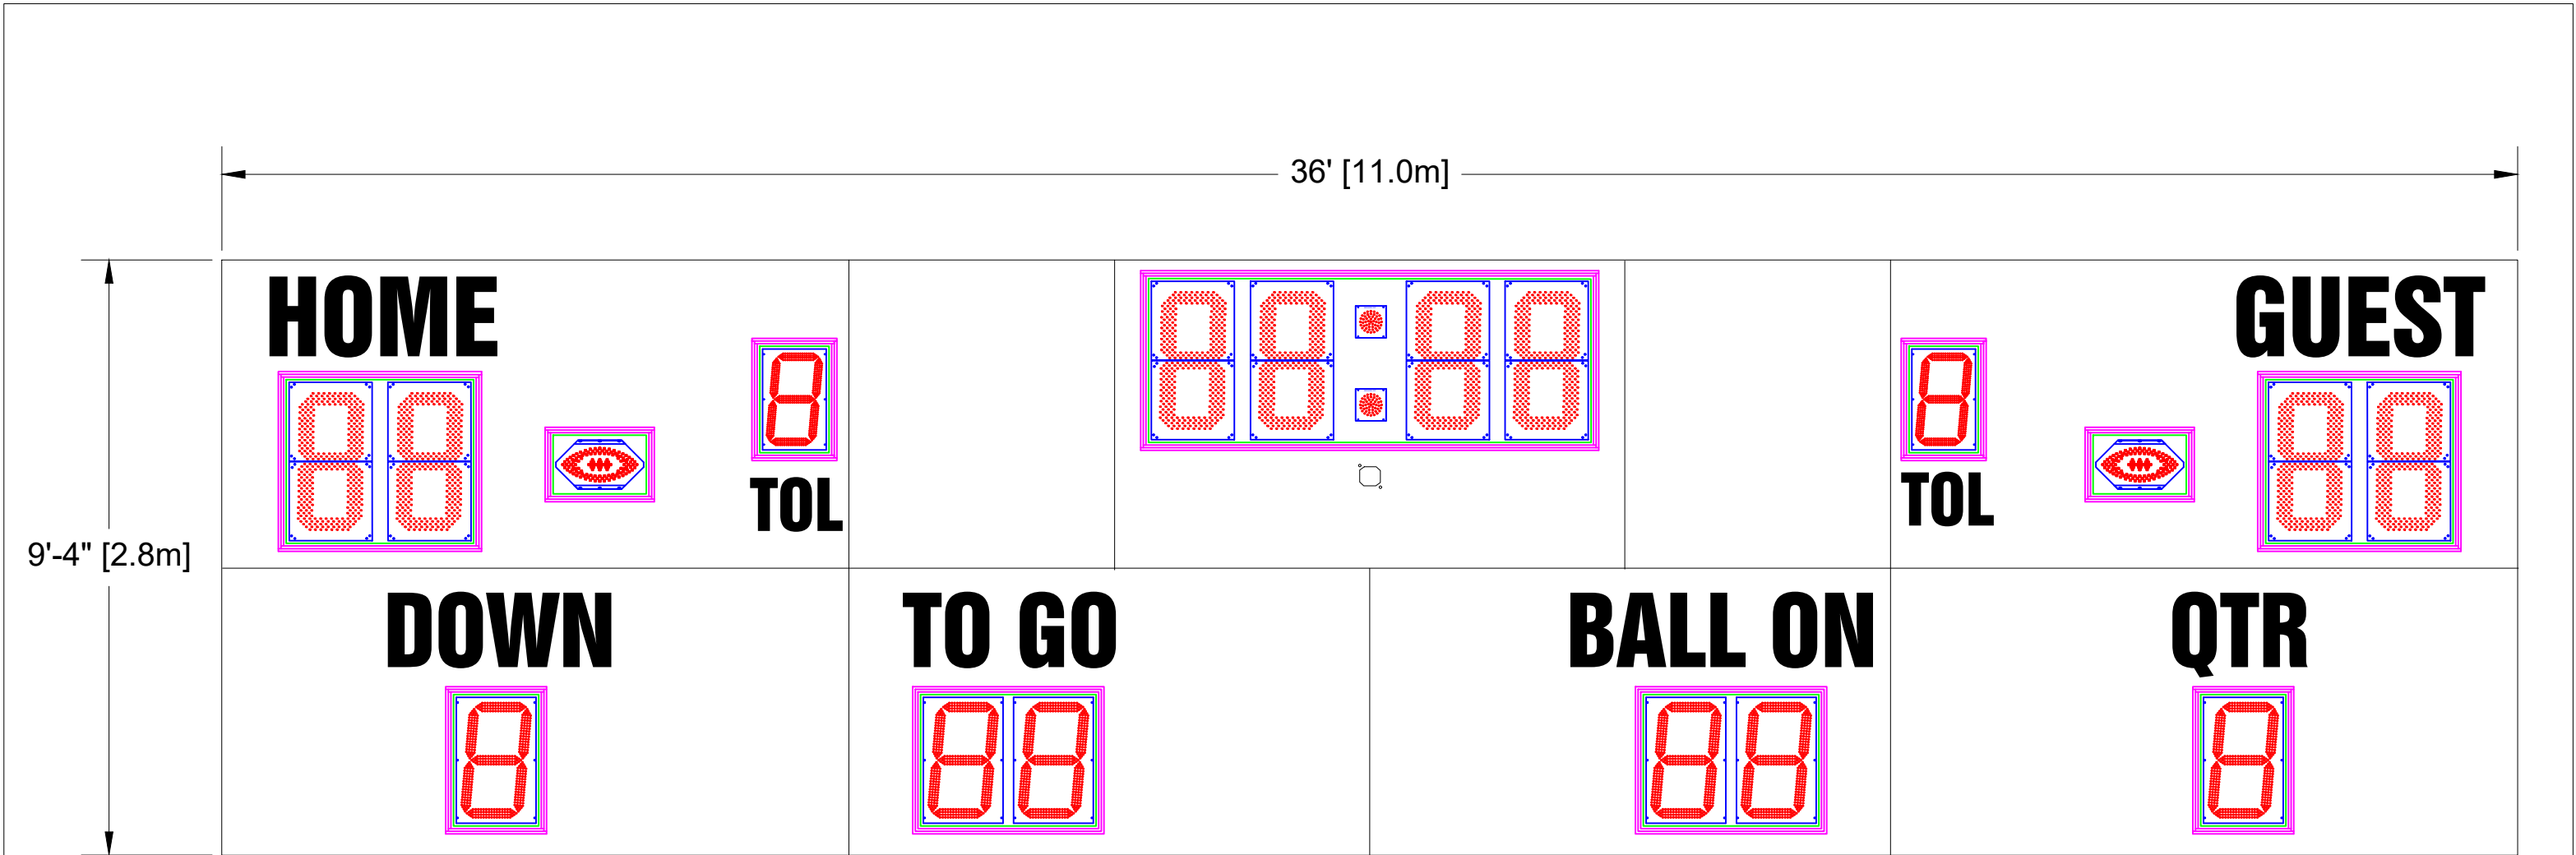

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1364 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL


15" White Vinyl Lettering for HOME, GUEST
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/14/2022

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8036AxCV	
SIZE	FILENAME M8036AUXV	INIT DRAWING DATE 3/14/22	REV A
A	USAGE USE FOR REVIEW		
SCALE	NTS	DRAWN BY MLI	PAGE 1 OF 1

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

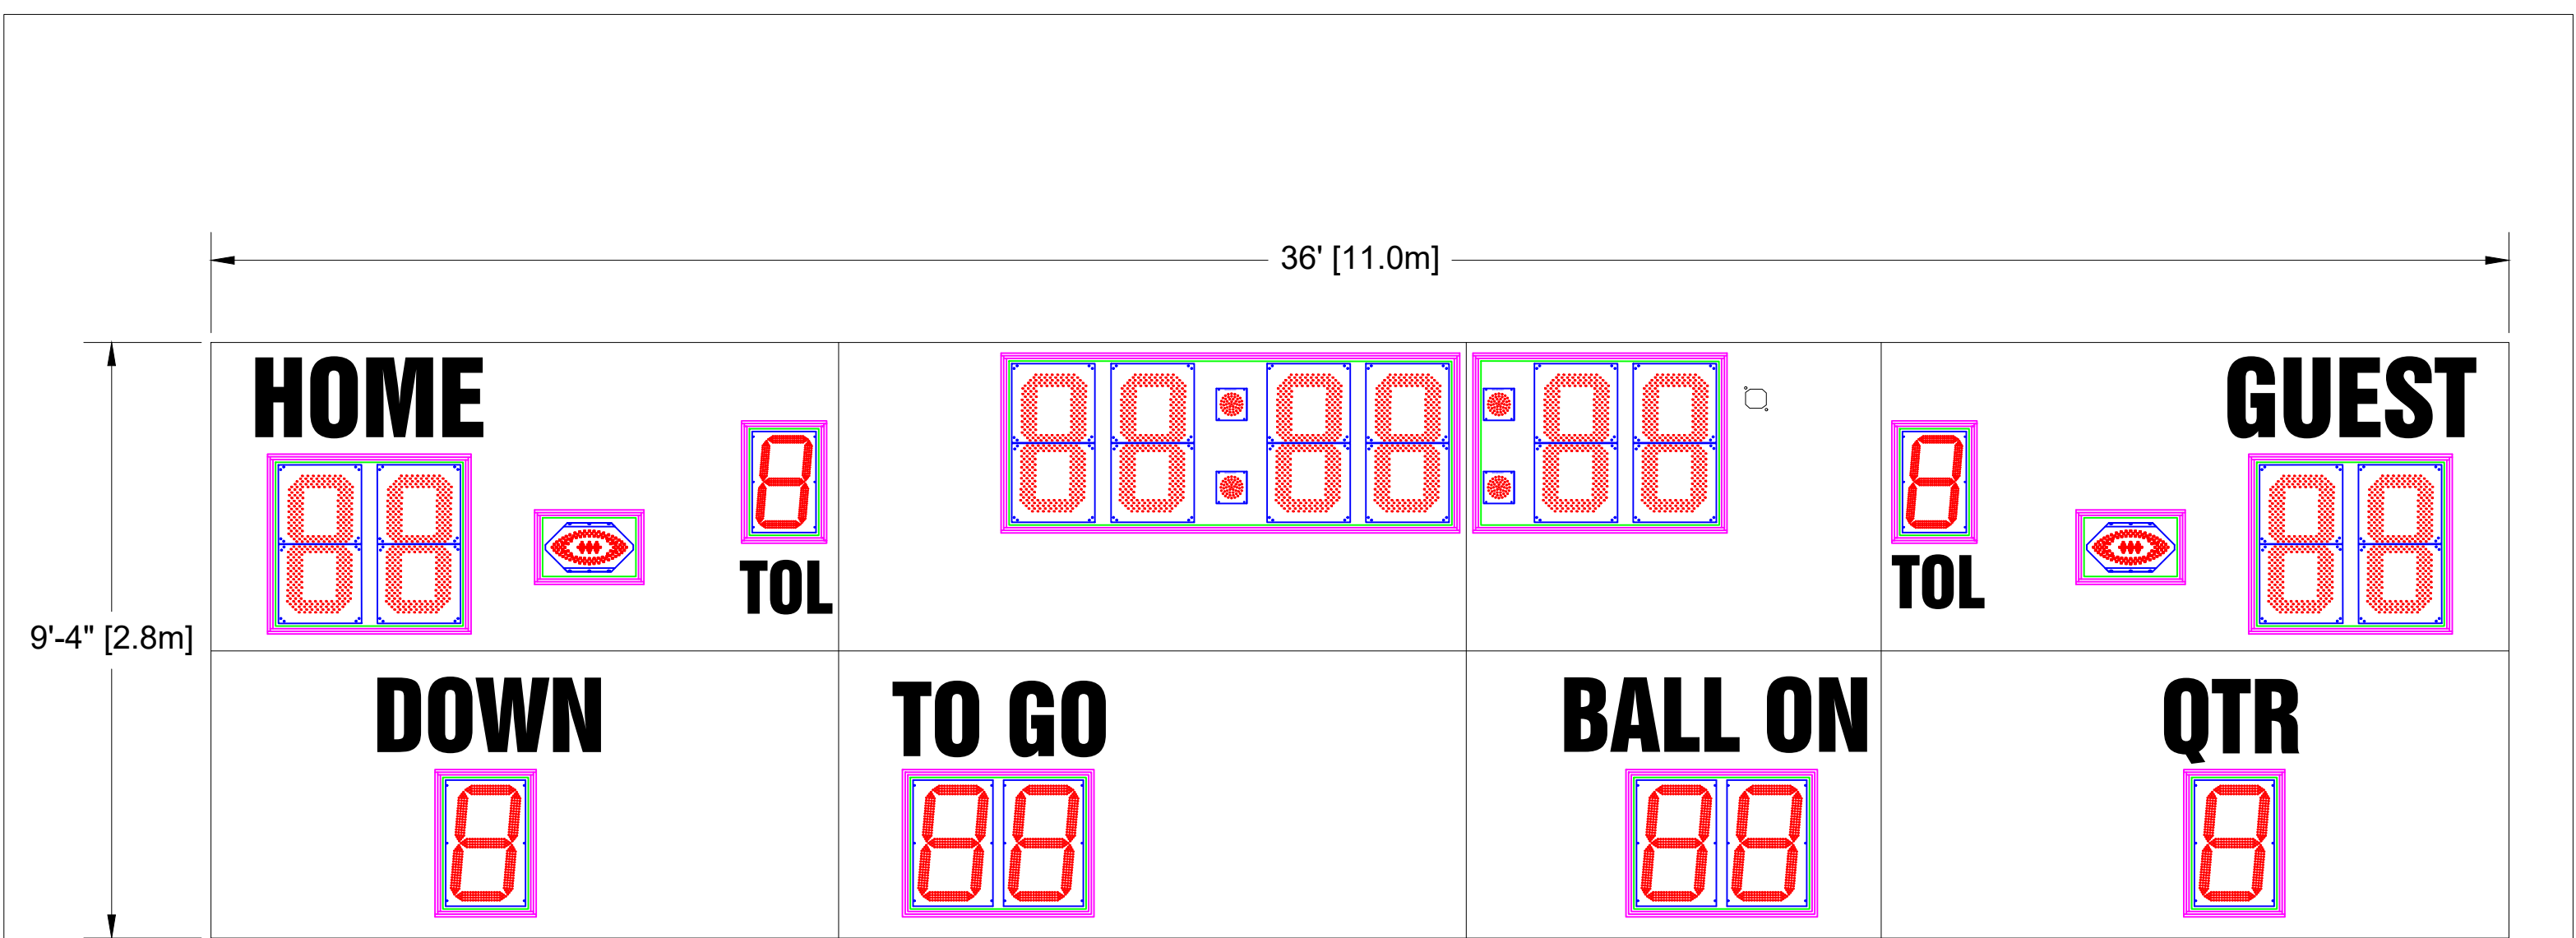

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1402 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL


- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION	AUTHOR	DATE
A		INITIAL DESIGN	OES	3/14/2022

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div><div><div>OES</div><div>SCOREBOARDS</div></div><div>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</div></div>			
				DESCRIPTION	
				OES ELECTRONIC SCOREBOARDS M8036AxCV-H	

SIZE A	FILENAME M8036AUXV-H	INIT DRAWING DATE 3/14/22	REV A
	USAGE USE FOR REVIEW		

SCALE	NTS	DRAWN BY	MLI	PAGE	1 OF 1
-------	-----	----------	-----	------	--------

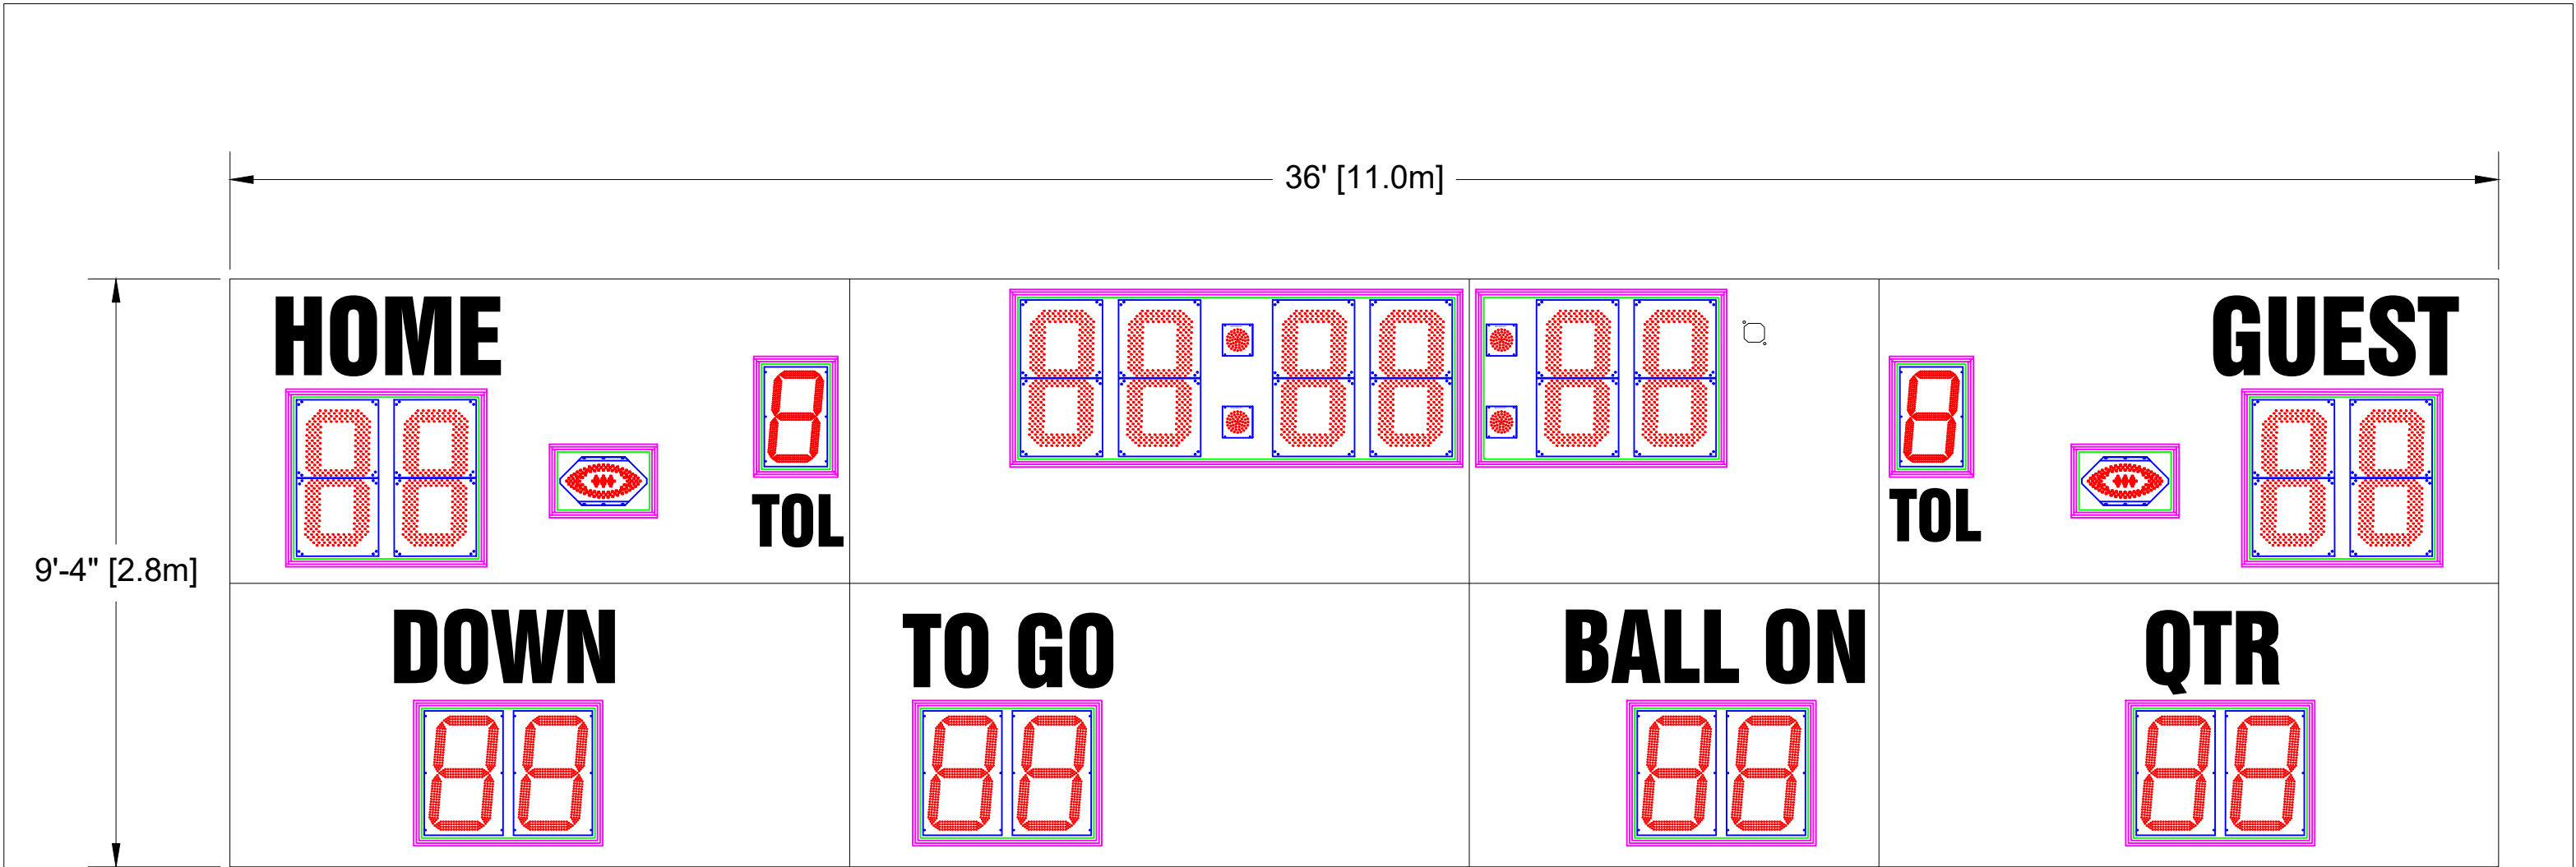

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1420 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL


15" White Vinyl Lettering for HOME, GUEST
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION		DESCRIPTION		AUTHOR	DATE
A		INITIAL DESIGN		OES	3/14/2022

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>		<div>DESCRIPTION</div> <div>OES ELECTRONIC SCOREBOARDS M8036AxCV-HF</div>	
				SIZE A	FILENAME M8036AUXV-HF
				INIT DRAWING DATE 3/14/22	REV A
				USE FOR REVIEW	
SCALE NTS		DRAWN BY MLI		PAGE 1 OF 1	

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

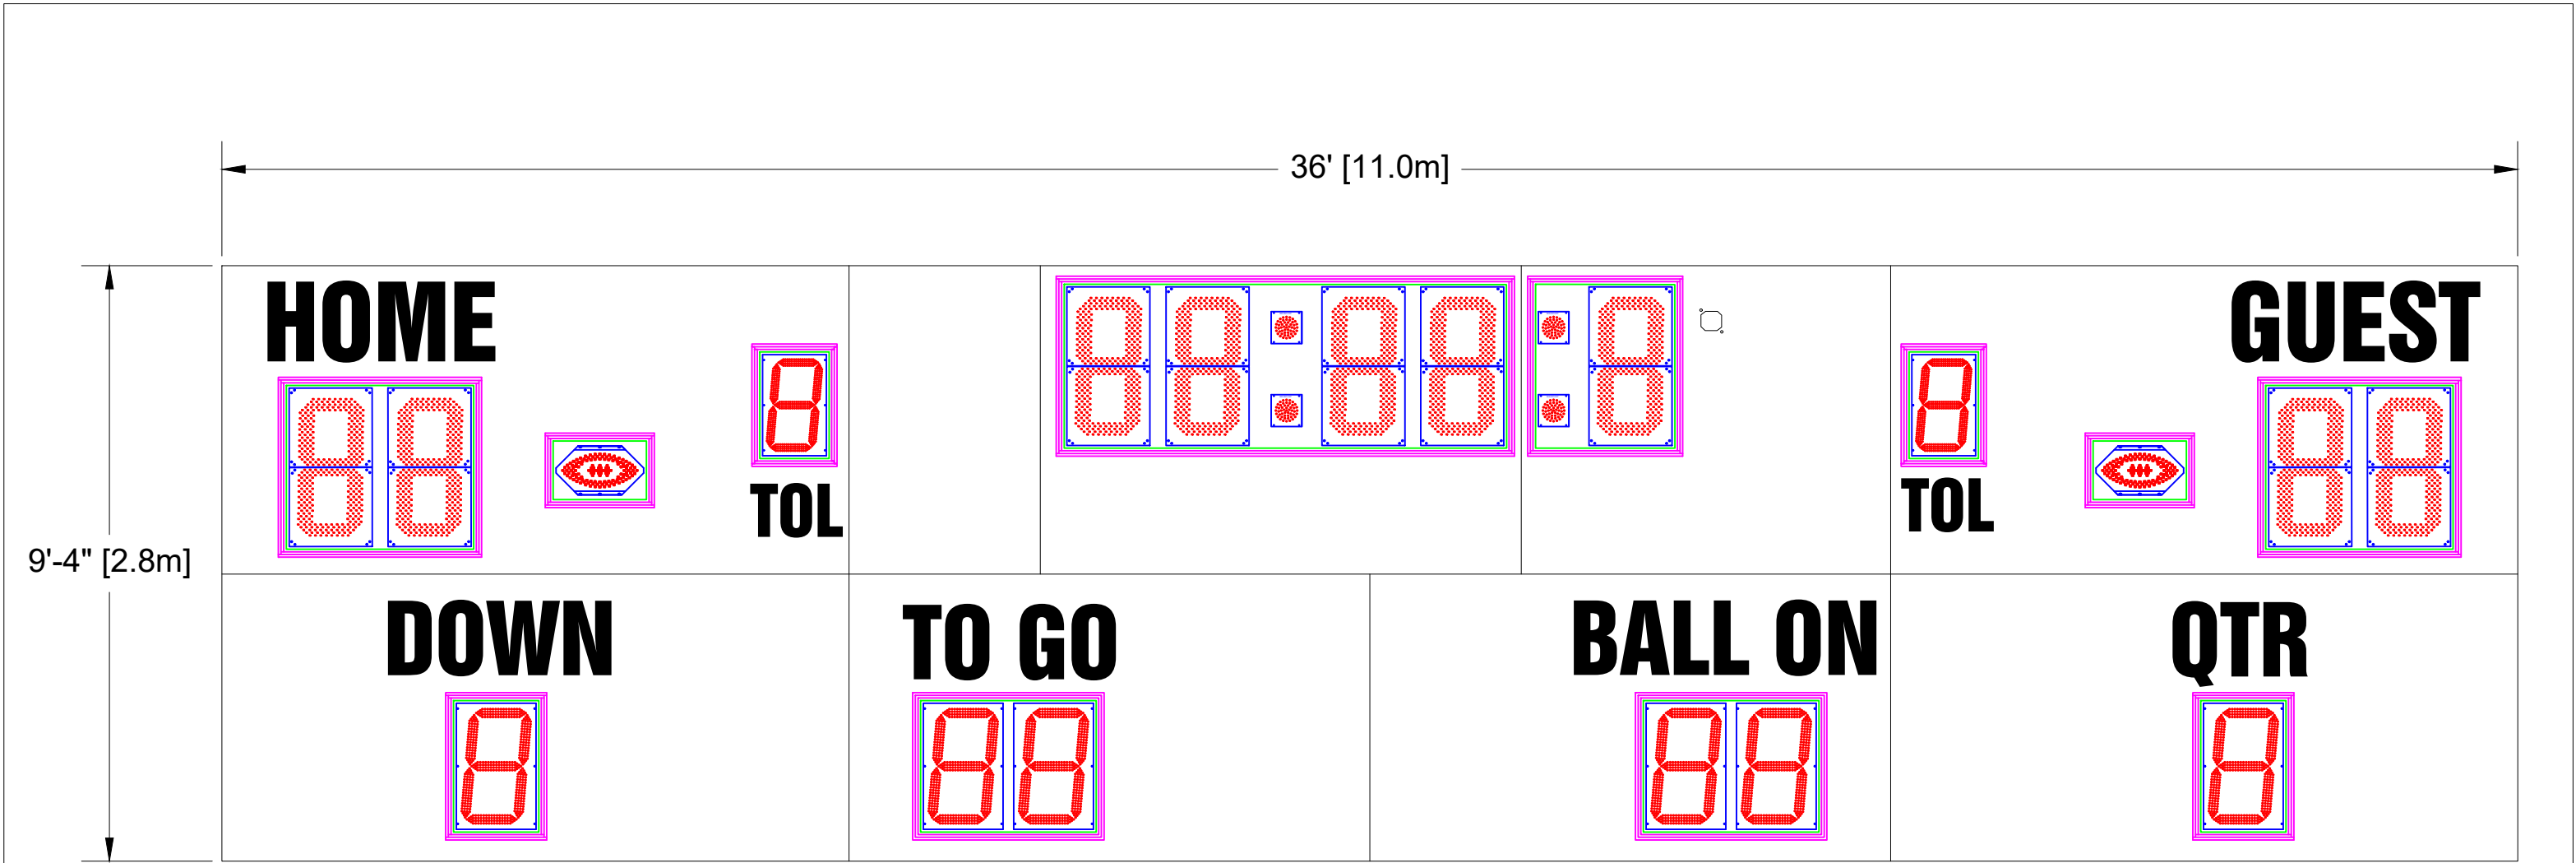

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1384 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL


15" White Vinyl Lettering for HOME, GUEST
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	3/14/2022

<div>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</div> <div>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.</div> <div>TOLERANCE INFORMATION Dimensions are in Inches</div> <div>Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°</div>		<div>THIRD ANGLE PROJECTIONS</div> <div></div>	
DESCRIPTION		OES ELECTRONIC SCOREBOARDS M8036AxCV-T	
SIZE	FILENAME	INIT DRAWING DATE	REV
A	M8036AUXV-T	3/14/22	A
USAGE		USE FOR REVIEW	
SCALE	NTS	DRAWN BY	PAGE
		MLI	1 OF 1

4056 Blakie Road,
London, ON, N6L 1P7
Tel: (519) 652-5833
Fax: (519) 652-3795
Email: oes@oes-inc.com

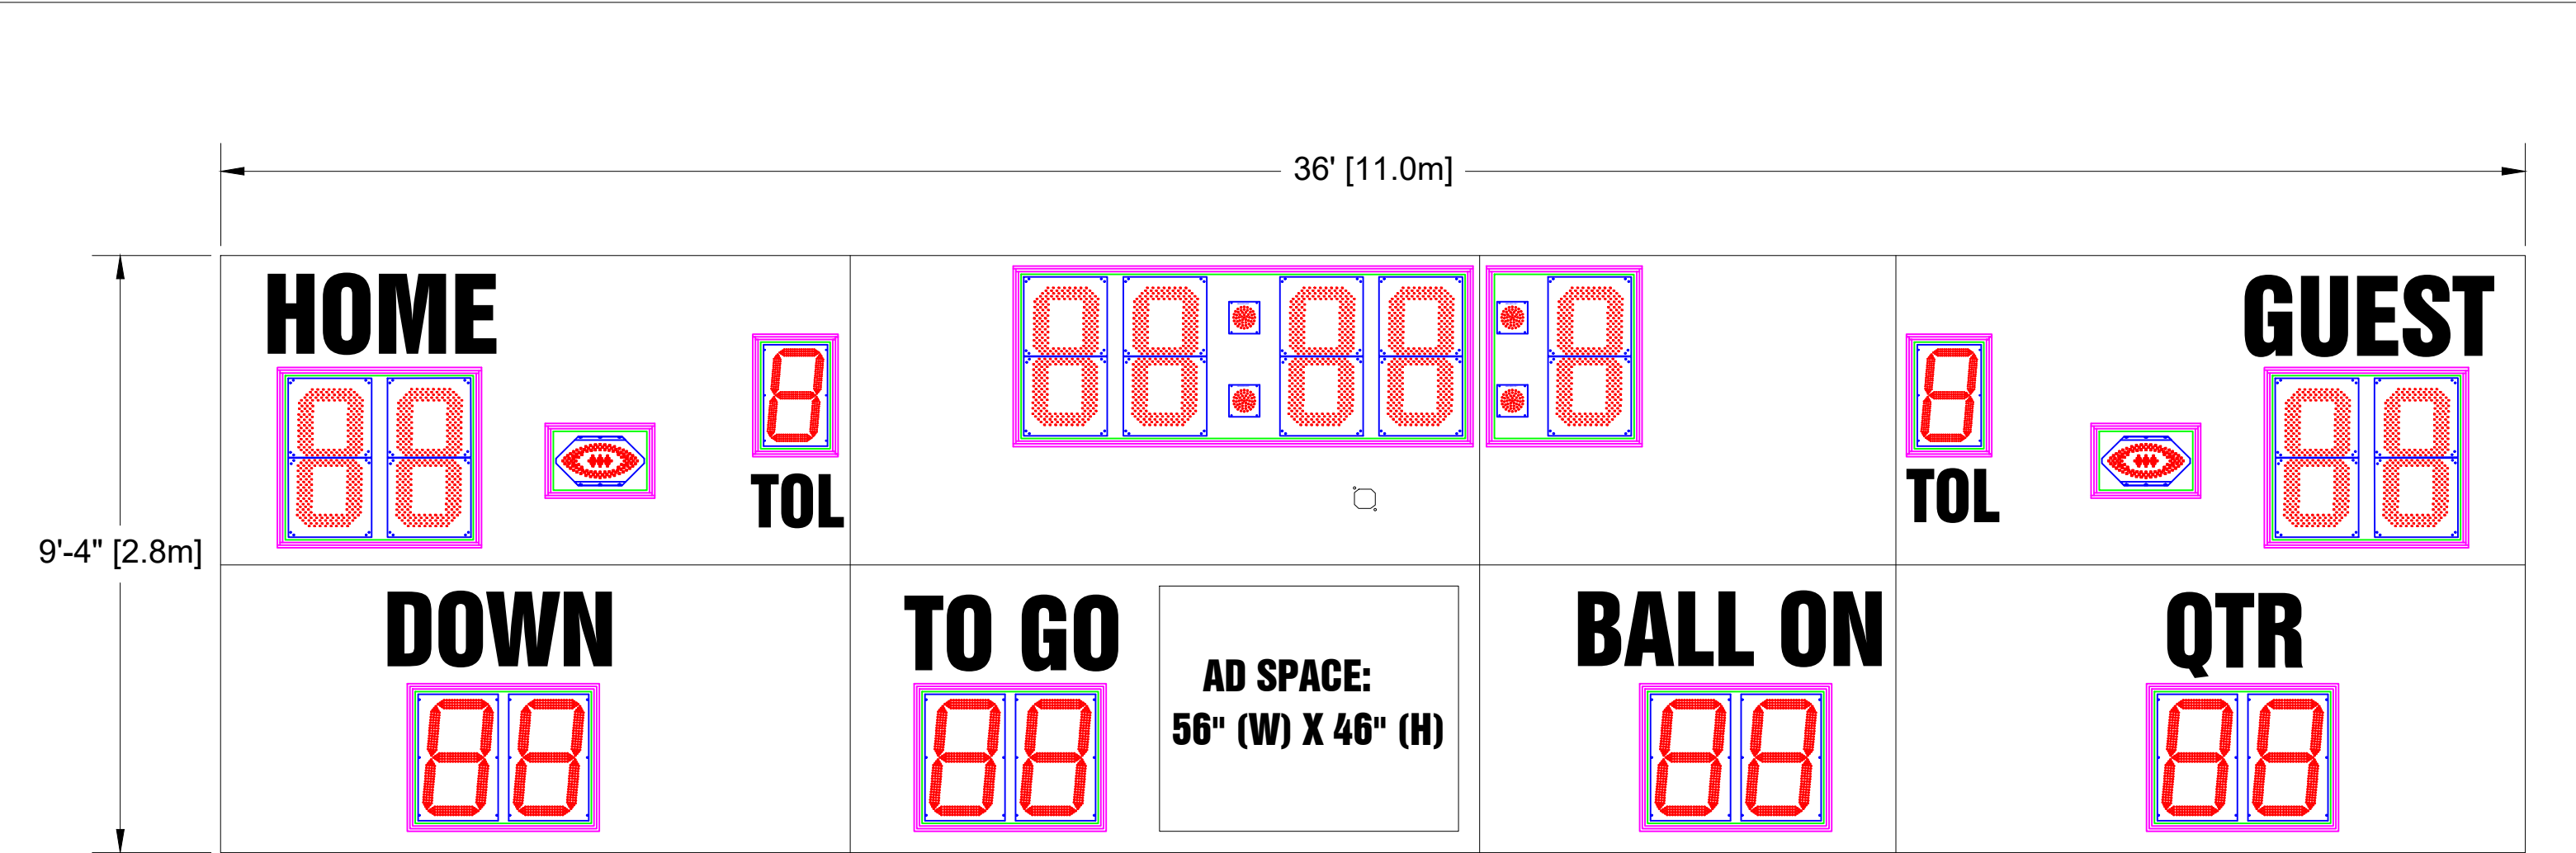

Scoreboard Specifications

Overall size: 36' (W) x 9'-4" (H) x 6" (D)
Approximate Weight: 1405 lbs
Incoming Mains Power: (2x) 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 15 Amps. Requires an earth ground connection.
Incoming Mains Power and Data Location: Behind the BALL ON Digit(s).

30" LED Digits for HOME, GUEST, TOD
22" LED Digits for DOWN, TO GO, BALL ON, QTR
17" LED Digits for TOL

15" White Vinyl Lettering for HOME, GUEST
14" White Vinyl Lettering for DOWN, TO GO, BALL ON, QTR
10" White Vinyl Lettering for TOL

- All LED digits include the following:
- * Shatter Resistant Lexan cover
 - * Conformal coating to protect from environmental conditions
 - * Surface Mount Technology LEDs allowing for wider viewing angle

REVISION	DESCRIPTION	AUTHOR	DATE
A	INITIAL DESIGN	OES	5/13/2021

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, INC.		TOLERANCE INFORMATION Dimensions are in Inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angular ± 30°		THIRD ANGLE PROJECTIONS 	
DESCRIPTION OES ELECTRONIC SCOREBOARDS M8036AxCV-TF		SIZE A	FILENAME M8036AUXV-TF	INIT DRAWING DATE 5/13/21	REV A
SCALE NTS		DRAWN BY CGTHOMPSON		PAGE 1 OF 1	