

ELECTRICAL SPECIFICATIONS

Electrical Ratings:
 - AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
 - MAX Current: 6.1 Amps
 - AC Current Rating of Fuse or Circuit Breaker within SB: 8 Amps

Incoming AC Mains (Power Cord) and Data Location:
 Behind the TIME of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

Scoreboard Specifications

Overall size: 9'11" (W) x 4'11" (H) x 6" (D)
 Approximate Weight: 290 lbs





17" LED Digits for (ALL)

8" White Vinyl Lettering for (ALL)

All LED digits include the following:
 *Shatter Resistant Lexan cover
 *Conformal coating to protect from environmental conditions
 *Surface Mount Technology LEDs allowing for wide viewing angle

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	8/18/2022	M.LI
B	Part Name Changed	5/27/2024	CArora

		4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com	
NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION: OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.			
TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angles ± 2°		THIRD ANGLE PROJECTION 	
DESCRIPTION OES ELECTRONIC SCOREBOARDS 3010AOCV-INFO		SIZE: FILENAME B 3010AOCV-INFO.idw	INIT DRAWING DATE: 2022-08-18 REV: B
USAGE: USE FOR REVIEW		SCALE: NTS	DRAWN BY: M.LI
		PAGE 1 OF 1	

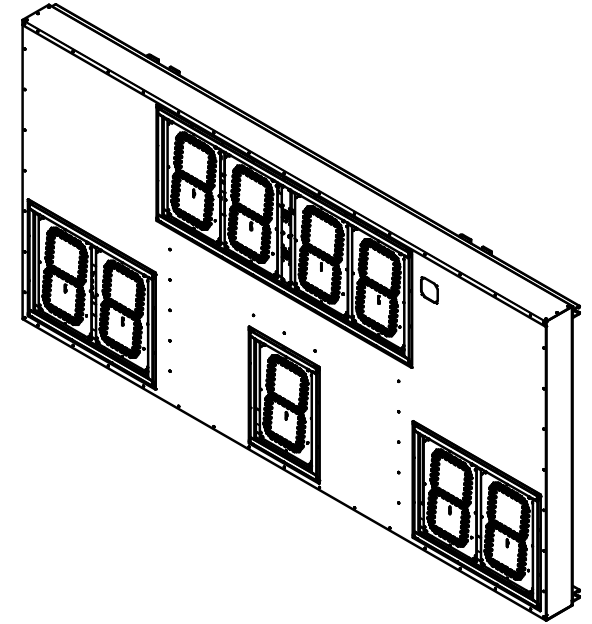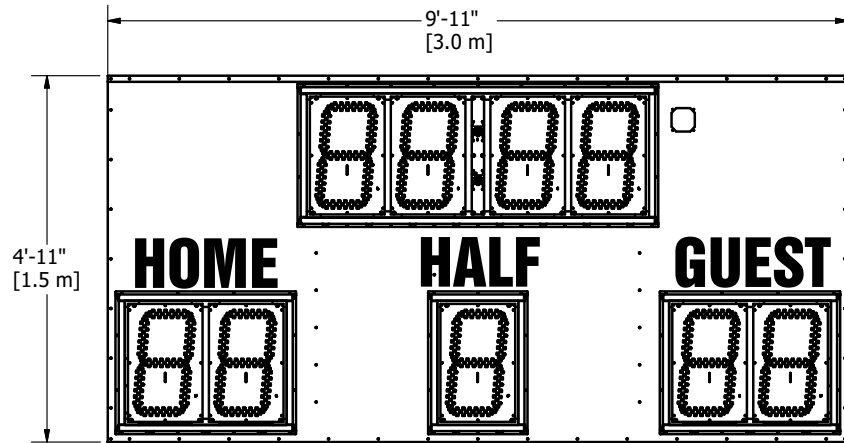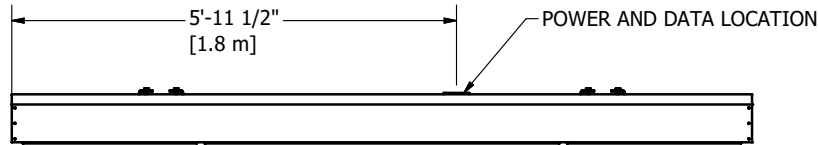

SINGLE CHANNEL UNISTRUT

Scoreboard Specifications

Overall size: 9'11" (W) x 4'11" (H) x 6" (D)
 Approximate Weight: 243 lbs

17" LED Digits for (ALL)

8" White Vinyl Lettering for (ALL)

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:

- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
 Requires an earth ground connection.


- MAX Current: 6.1 Amps

- AC Current Rating of Fuse or Circuit Breaker within SB: 8 Amps


Incoming AC Mains (Power Cord) and Data Location:
 Behind the TIME of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
 to be determined by customer in accordance
 with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	8/18/2022	M.LI
B	Part Name Changed	2024-05-27	C.Arora

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</p>		 <p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>DESCRIPTION</p> <p>OES ELECTRONIC SCOREBOARDS 3010AUCV-INFO</p>			
SIZE	FILENAME	INIT DRAWING DATE	REV
B	3010AUCV-INFO.idw	2022-08-18	B
<p>USAGE</p> <p>USE FOR REVIEW</p>			
SCALE	NTS	DRAWN BY	M.LI
			PAGE 1 OF 1

THIRD ANGLE PROJECTION



TOLERANCE INFORMATION
 Dimensions are in inches
 Fractional ± 1/16"
 Two Place Decimals ± 0.02"
 Three Place Decimals ± 0.005"
 Four Place Decimals ± 0.0005"
 Angles: ± 2'