

Scoreboard Specifications

Overall size: 16' (W) x 4'7" (H) x 6" (D)
 Approximate Weight: 460 lbs

22" LED Digits for (TIME, SCORE)
 17" LED Digits for (HALF)

12" White Vinyl Lettering for HOME, GUEST
 9" White Vinyl Lettering for HALF

- All LED digits include the following:
- *Shatter Resistant Lexan cover
 - *Conformal coating to protect from environmental conditions
 - *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:
 - AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
 Requires an earth ground connection.

- MAX Current: 9.9 Amps

- AC Current Rating of Fuse or Circuit Breaker within SB: 15 Amps

Incoming AC Mains (Power Cord) and Data Location:
 Behind the TIME of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
 to be determined by customer in accordance
 with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-12-12	LDeMello

NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:
 OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.

TOLERANCE INFORMATION
 Dimensions are in inches
 Fractional ± 1/16"
 Two Place Decimals ± 0.02"
 Three Place Decimals ± 0.005"
 Four Place Decimals ± 0.0005"
 Angular ± 2'

THIRD ANGLE PROJECTION



4056 Blakie Road,
 London, ON, N6L 1P7
 Tel: (519) 652-5833
 Fax: (519) 652-3795
 Email: oes@oes-inc.com

DESCRIPTION
OES ELECTRONIC SCOREBOARDS
3016AOCV-INFO

SIZE	FILENAME	INIT DRAWING DATE	REV
B	3016AOCV-INFO.idw	2023-12-12	A

USAGE
USE FOR REVIEW

SCALE	NTS	DRAWN BY	LDeMello	PAGE	1 OF 1
-------	-----	----------	----------	------	--------

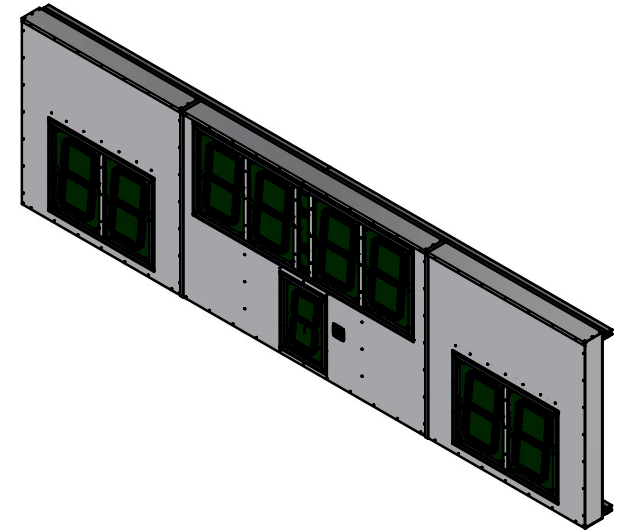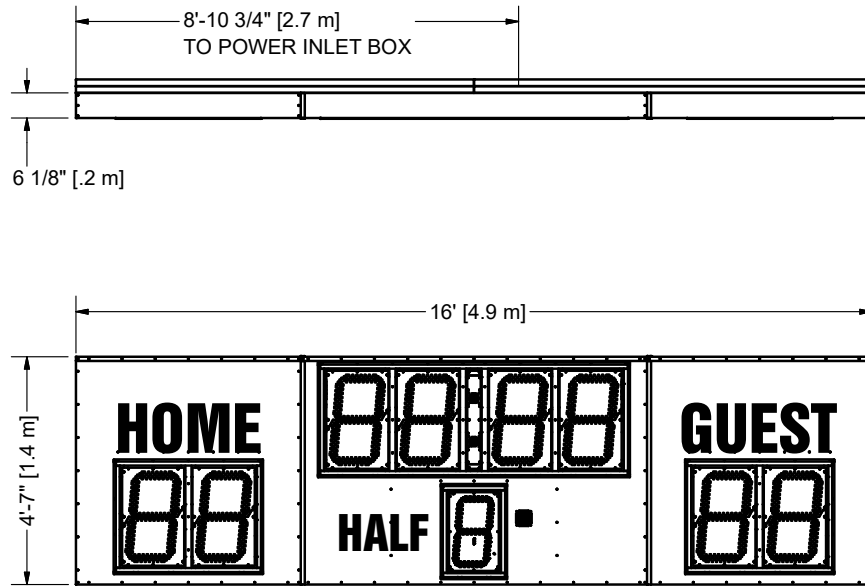

DOUBLE CHANNEL UNISTRUT

Scoreboard Specifications

Overall size: 16' (W) x 4'7" (H) x 6" (D)
 Approximate Weight: 460 lbs

22" LED Digits for (TIME, SCORE)
 17" LED Digits for (HALF)

12" White Vinyl Lettering for HOME, GUEST
 9" White Vinyl Lettering for HALF

All LED digits include the following:
 *Shatter Resistant Lexan cover
 *Conformal coating to protect from environmental conditions
 *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:
 - AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz.
 Requires an earth ground connection.

- MAX Current: 9.9 Amps

- AC Current Rating of Fuse or Circuit Breaker within SB: 15 Amps

Incoming AC Mains (Power Cord) and Data Location:
 Behind the TIME of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard
 to be determined by customer in accordance
 with all local electrical codes.

REVISION HISTORY			
REV	DESCRIPTION	DATE	AUTHOR
A	INITIAL DESIGN	2023-12-12	LDeMello

<p>NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:</p> <p>OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.</p>		<p>4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com</p>	
<p>TOLERANCE INFORMATION Dimensions are in inches Fractional ± 1/16" Two Place Decimals ± 0.02" Three Place Decimals ± 0.005" Four Place Decimals ± 0.0005" Angles ± 1°</p>		<p>DESCRIPTION OES ELECTRONIC SCOREBOARDS 3016AUCV-INFO</p>	
<p>THIRD ANGLE PROJECTION</p>		<p>SIZE: FILENAME B 3016AUCV-INFO.idw</p>	<p>INIT DRAWING DATE 2023-12-12</p> <p>REV A</p>
<p>SCALE NTS</p>		<p>DRAWN BY LDeMello</p>	<p>PAGE 1 OF 1</p>