

Overall size: 4' 3-1/4" (W) x 4' 4" (H) x 6" (D)

Approximate Weight: 108 lbs

Incoming Mains Power: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: On the RIGHT Side of the Scoreboard

36" LED Digits for TIME

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle

Mounting Options:

- Single Channel Unistrut (SHOTS36UCE)
- 3x3x3/16" Angle Iron (SHOTS36OCE)



NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOTTO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches


Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'

THIRD ANGLE PROJECTIONS

Email: oes@oes-inc.com OES ELECTRONIC SCOREBOARDS

Tel: (519) 652-5833 Fax: (519) 652-3795

SHOTS36OCE SIZE FILENAME SHOTS36OCE INIT DRAWING DATE REV 2/24/25 USAGE **USE FOR REVIEW** DRAWWANMOORSELPAGE 1 OF 1

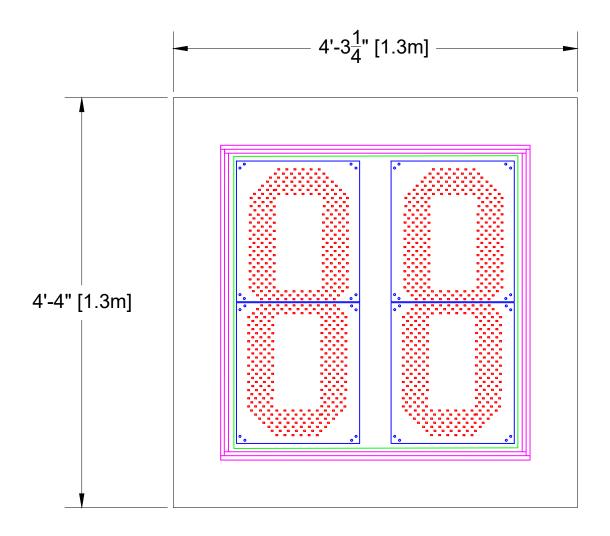

Overall size: 4' 3-1/4" (W) x 4' 4" (H) x 6" (D)

Approximate Weight: 108 lbs

Incoming Mains Power: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the Scoreboard

36" LED Digits for TIME

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle

Mounting Options:

- Single Channel Unistrut (SHOTS36UCE)
- 3x3x3/16" Angle Iron (SHOTS36OCE)



NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOTTO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches

Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'


THIRD ANGLE PROJECTIONS

Fax: (519) 652-3795 Email: oes@oes-inc.com OES ELECTRONIC SCOREBOARDS

SHOTS36OCE-RP

Tel: (519) 652-5833

SIZE FILENAME SHOTS36OCE-RP INIT DRAWING DATE REV 2/24/25 **USE FOR REVIEW** DRAWWANMOORSELPAGE 1 OF 1

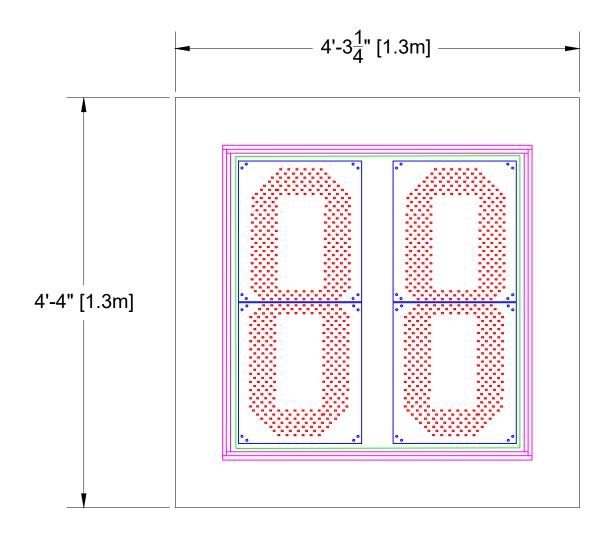

Overall size: 4' 3-1/4" (W) x 4' 4" (H) x 6" (D)

Approximate Weight: 87 lbs

Incoming Mains Power: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: On the RIGHT Side of the Scoreboard

36" LED Digits for TIME

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle

Mounting Options:

- Single Channel Unistrut (SHOTS36UCE)
- 3x3x3/16" Angle Iron (SHOTS36OCE)



NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOTTO BE COPIED, REPRODUCED OR USED IN ANY

TOLERANCE INFORMATION Dimensions are in Inches

Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'

WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES, THIRD ANGLE PROJECTIONS


Email: oes@oes-inc.com OES ELECTRONIC SCOREBOARDS

Tel: (519) 652-5833 Fax: (519) 652-3795

SHOTS36UCE

SIZE FILENAME SHOTS36UCE INIT DRAWING DATE REV 2/24/25 **USE FOR REVIEW**

DRAWWANMOORSELPAGE 1 OF 1

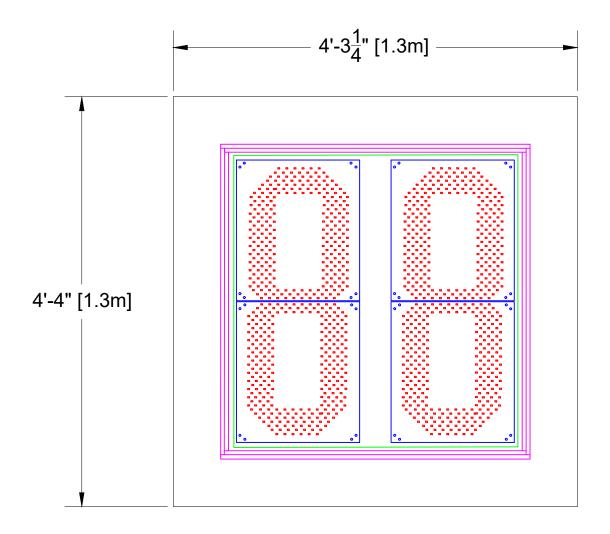

Overall size: 4' 3-1/4" (W) x 4' 4" (H) x 6" (D)

Approximate Weight: 87 lbs

Incoming Mains Power: 120VAC (+/-10%) 1 Phase, 2 Wire, 60Hz / 5 Amps. Requires an earth ground connection.

Incoming Mains Power and Data Location: Behind the Scoreboard

36" LED Digits for TIME

All LED digits include the following:

- Shatter Resistant Lexan cover
- Conformal coating to protect from environmental conditions
- Surface Mount Technology LEDs allowing for wider viewing angle

Mounting Options:

- Single Channel Unistrut (SHOTS36UCE)
- 3x3x3/16" Angle Iron (SHOTS36OCE)



NOTICE TO PERSON RECEIVING THIS DRAWING AND TECHNICAL INFORMATION:

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWING INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES, INC. AND AS SUCH IS NOTTO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES,

TOLERANCE INFORMATION Dimensions are in Inches

Two Place Decimals ± 0.02"
Three Place Decimals ± 0.005"
Four Place Decimals ± 0.0005"
Angular ± 30'

THIRD ANGLE PROJECTIONS

OES ELECTRONIC SCOREBOARDS SHOTS36UCE-RP

Tel: (519) 652-5833 Fax: (519) 652-3795

Email: oes@oes-inc.com

SIZE FILENAME SHOTS36UCE-RP INIT DRAWING DATE REV 2/24/25 **USE FOR REVIEW** DRAWWANMOORSELPAGE 1 OF 1