

UPDATE ETHERNET MODULE FOR CFM2X03 OR CFM4X03


Please follow these instructions when updating the Ethernet module.

Files Required

1. Most recent ForceView3 installer (install_forceview-3.4.0.2.exe)
2. Firmware file (CFM35089V2-R.266.S19)
3. Autogen Instructions (CFM4x03 Appendix_AutoGen Instruction.pdf)
4. DigiDiscovery.exe tool
5. Digi Config file (DigiME4_CFM_115.cfg)

Instruction

1. Connect the CFM using the **Ethernet cable**
2. Open the Digi Discovery tool
3. Open the web interface for the CFM

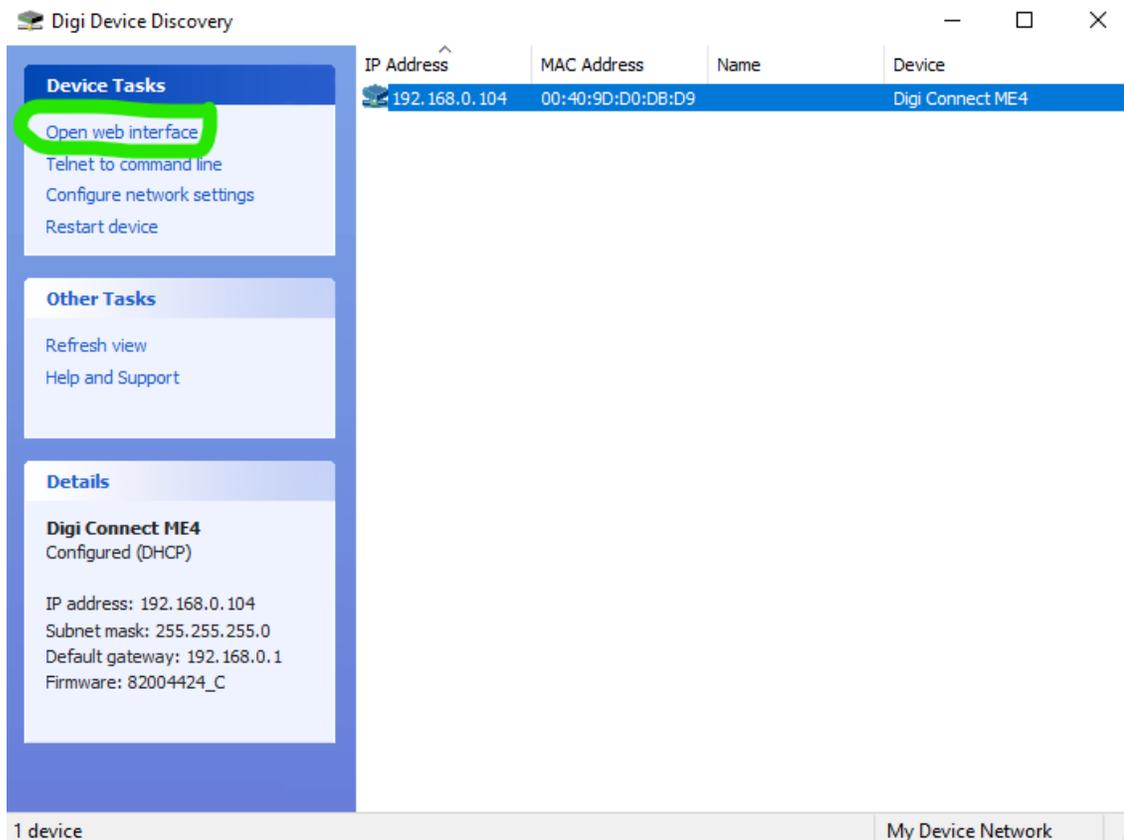

Digi Device Discovery

IP Address	MAC Address	Name	Device
192.168.0.104	00:40:9D:D0:DB:D9		Digi Connect ME4

Device Tasks

- Open web interface
- Telnet to command line
- Configure network settings
- Restart device

Other Tasks

- Refresh view
- Help and Support

Details

Digi Connect ME4
Configured (DHCP)

IP address: 192.168.0.104
Subnet mask: 255.255.255.0
Default gateway: 192.168.0.1
Firmware: 82004424_C

1 device | My Device Network

4. Log into the Digi module
Username: **root**
Password: **dbps**
5. Click "Backup/Restore"



Digi Connect ME4 Configur

[Home](#)

Configuration

- [Network](#)
- [Serial Ports](#)
- [GPIO](#)
- [Alarms](#)
- [System](#)
- [Remote Manager](#)
- [Users](#)

Applications

- [RealPort](#)

Management

- [Serial Ports](#)
- [Connections](#)

Administration

- [File Management](#)
- [Backup/Restore](#)**
- [Update Firmware](#)
- [Factory Default Settings](#)
- [System Information](#)
- [Reboot](#)

[Logout](#)

Home

[Getting Started](#)

Tutorial Not sure what to do next? This Tut

System Summary

Model:	Digi Connect ME4
Ethernet MAC Address:	00:40:9D:D0:DB:D9
Ethernet IP Address:	192.168.0.104
Link Local Address:	FE80::240:9DFF:FED
Description:	CFM4100 Crimp Forc
Contact:	OES Inc.
Location:	None
Device ID:	00000000-00000000

6. Click on “Choose File” and select the DigiME4_CFM_115.cfg file. Then click “Restore”

Restore configuration from a file on your PC or server.

Note: If the restored configuration modifies the network settings, your Digi device server will redirect your browser to the new IP address.

Restore From File: DigiME4_CFM_115.cfg
 Restoring configuration. Please wait...

Copyright © 1996-2013 Digi International Inc. All rights reserved.

7. Click “Reboot”

Digi Connect ME4 Configuration and Management

Configuration has been successfully restored.
You must reboot for these new settings to take effect.

Reboot

The reboot process will take approximately 1 minute to complete. Click Reboot now to reboot the Digi Connect ME4.

8. It will take approximately 1 minute for the ethernet module to reboot, then the process is complete.